


LHS INSIDE VIEW

FRONT INSIDE VIEW

RHS INSIDE VIEW

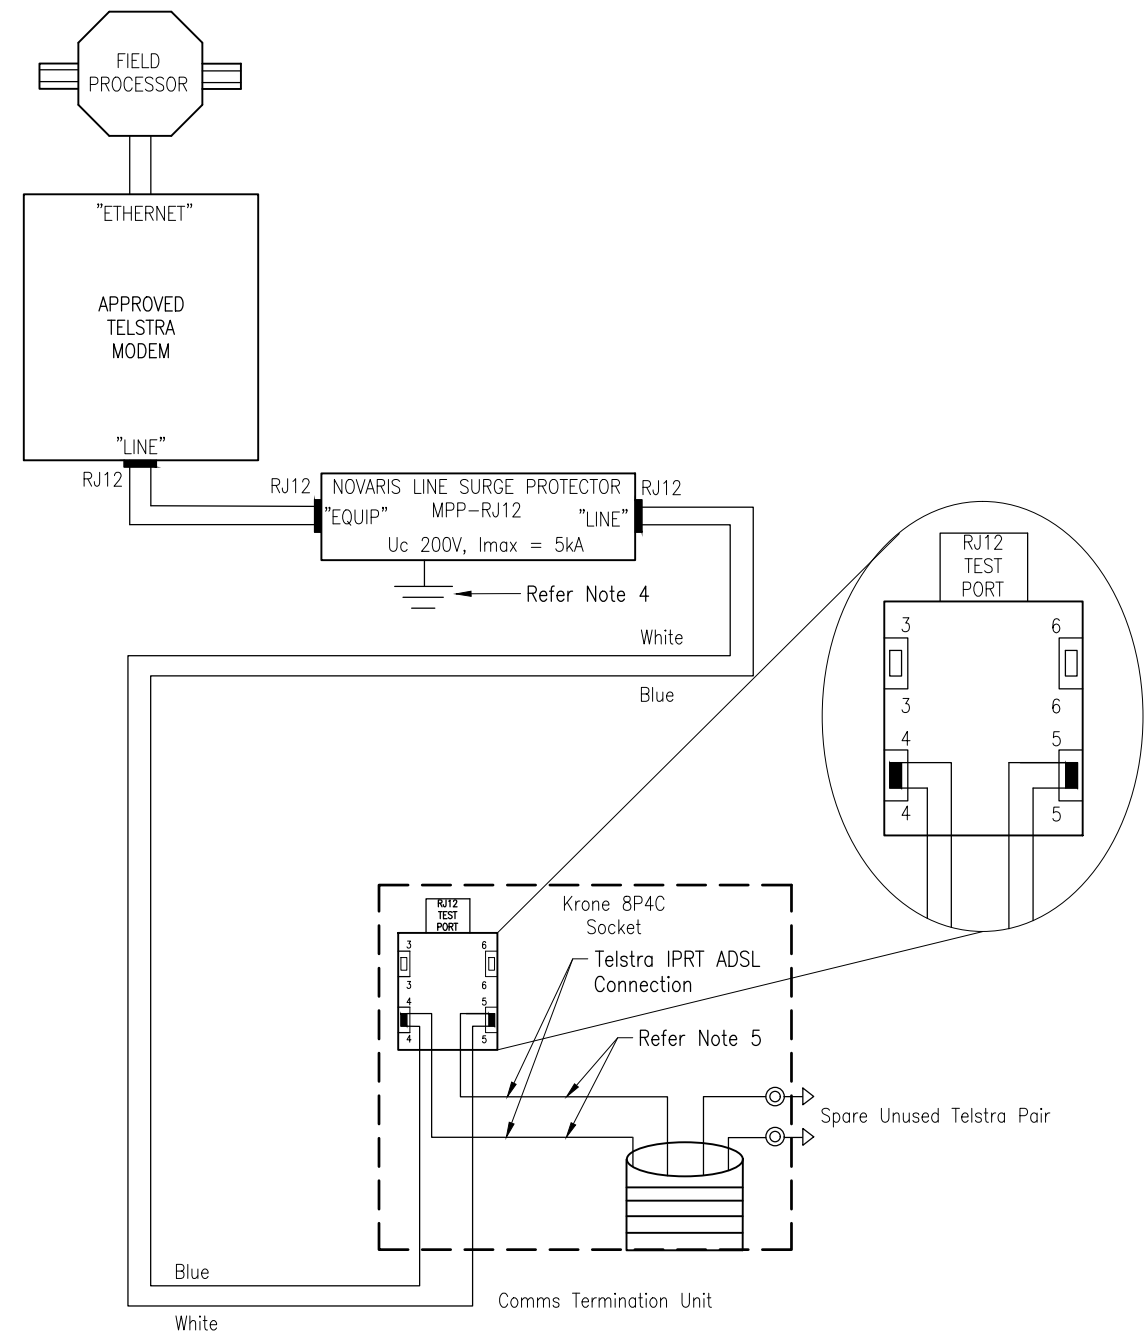

SCHEMATIC

NOTES

1. Transmax to supply FP-to-Controller module serial cable.
2. Telstra/UHS modem mounted on vertical bracket supplied as shown.
3. Telephone cable in 20mm flexible conduit fastened to underside of shelf using cable ties.
4. Novaris MPP-RJ12 telephone line surge protector must be earthed.
5. Second copper pair Telstra remote telemetry service terminated to Novaris "LINE IN" by Krone 8P4C Socket.
6. All electrical installation in accordance with AS/NZS 3000 and the Electrical Safety Act (QLD).
7. CAT5 cabling to conform to T568A.
8. Where Krone 8P4C connectors are not practical, the use of gel filled Scotchlok connectors is acceptable.

ASSOCIATED DEPARTMENTAL DOCUMENTS:

- Standard Drawings
- Specifications

REFERENCED DOCUMENTS:

- Departmental Standard Specifications:
- MRTS201 General Equipment Requirements

Australian Standards:

- AS/NZS 3000 Electrical Installations (Wiring Rules)

Department of Transport and Main Roads		 <small>© The State of Queensland (Department of Transport and Main Roads) 2020 http://creativecommons.org/licenses/by/3.0/au</small>
ITS IPRT NETWORK		
TYPICAL TRAFFIC CONTROLLER TELSTRA MODEM AND ASSOCIATED COMMUNICATIONS CABLING		A3 Not to Scale Standard Drawing No <h1 style="margin: 0;">1780</h1> Date 3/2020
A	B	