




**DETAIL 1**  
**1653** PLANTING CONTAINED AREAS  
<25L CONTAINER  
SLOPE ≤ 1 ON 4

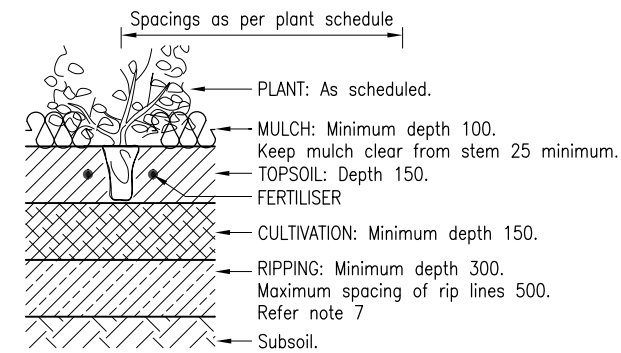


**DETAIL 2**  
**1653** PLANTING BROADACRE AREAS  
<25L CONTAINER  
SLOPE ≤ 1 ON 4

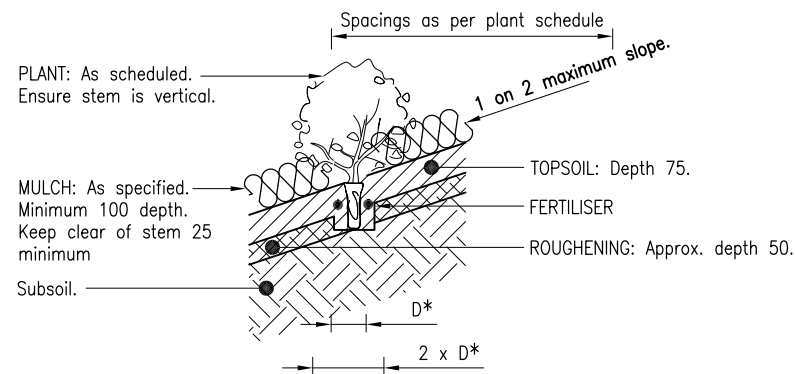


**DETAIL 3**  
**1653** PLANTING SLOPES  
TOPSOIL TO SLOPE  
<25L CONTAINER  
SLOPE > 1 ON 4

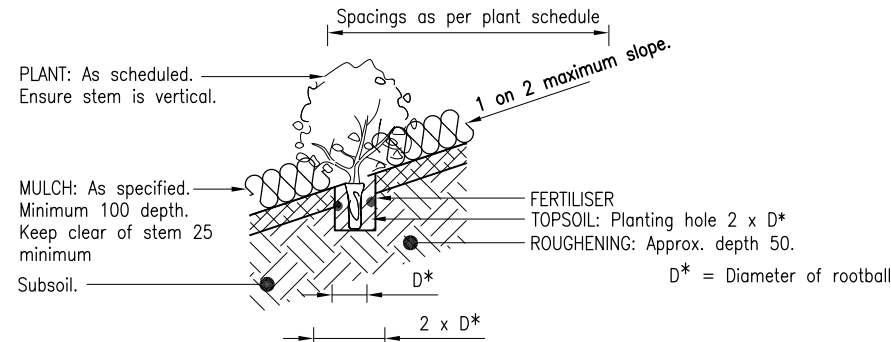

**DETAIL 4**  
**1653** PLANTING SLOPES  
TOPSOIL TO PLANTING HOLES  
<25L CONTAINER  
SLOPE > 1 ON 4

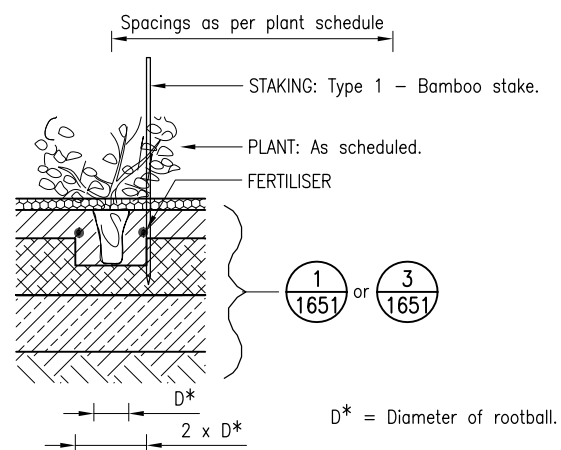

**DETAIL 5**  
**1653** SEEDING AREAS WITH PLANTING  
<25L CONTAINER  
SLOPE ≤ 1 ON 4

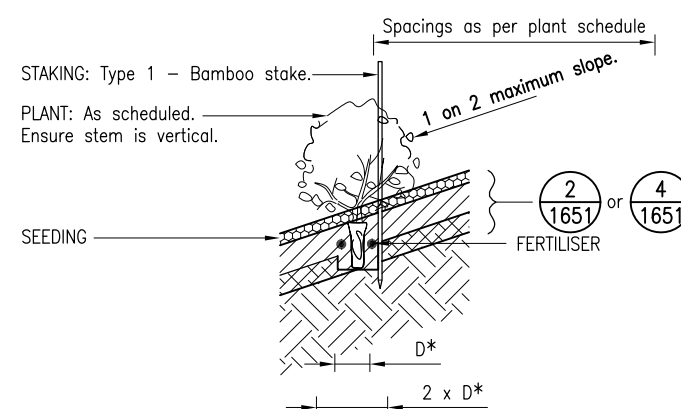

**DETAIL 6**  
**1653** SEEDING WITH PLANTING  
<25L CONTAINER  
SLOPE > 1 ON 4

## Staking Schedule

| Description              | Container   | Ties | Number of stakes |
|--------------------------|---|------|------------------|
| 600 x 10 diameter bamboo | Tube - 200mm stock (Marker for supplementary planting in seeded areas only) | -    | 1                |
| 1500 x 25 x 25 hardwood  | 25 - 40L (Tree species only)  | Yes  | 2                |
| 1800 x 50 x 50 hardwood  | 100L stock (Tree species only)  | Yes  | 2                |
| Guys                     | ≥ 200L and ex-ground  | -    | -                |

### NOTES:

- AMELIORATION: Where subsoil amelioration is required, ameliorants shall be applied to the surface prior to ground preparation operations (ripping, cultivation or roughening).
- GROUND PREPARATION: shall be carried out parallel to the contours.
- GROUND PREPARATION adjacent to hardstand areas shall be in accordance with Standard Drawing 1644.
- GROUND PREPARATION in kerbed medians and separators, shall be in accordance with Standard Drawing 1643.
- GROUND PREPARATION: Non-conforming stone, rubble and other deleterious material brought to the surface during ground preparation operations, shall be removed.
- ROUGHENING shall roughen and form keys in the subsoil to prevent subsequent material slipping down the face.
- RIPPING is required only where ground has been:
  - previously compacted; or
  - used by vehicular traffic.
  - ie. decommissioned site compounds, building pads, parking areas, stock pile areas, roads and haul routes
- RIPPING shall shatter compacted subsoil sufficiently to allow the subsequent cultivation operation.
- CULTIVATION shall break up the surface of the subsoil sufficiently to produce a finely tilled material.
- GROUND PREPARATION: Non-conforming stone, rubble and other deleterious material that is brought to the surface during ground preparation operations, shall be removed.
- FERTILISER shall be placed at approximately half the hole depth. Fertiliser shall not be placed at the base of the plant or in contact with the plant's root system.
- TOPSOIL: Depths are after settlement has occurred. Allowance shall be made for settlement during installation.
- TOPSOIL: After installation no compaction is to occur apart from compaction resulting from mulching or other planting operations.
- MULCH shall not contaminate planting hole material.
- MULCH shall be evenly spread smooth. Depths are minimum depths after settlement has occurred. Allowance shall be made for settlement during installation.
- PLANTS must be installed in accordance with design constraints (clearzone, sight visibility, and other vegetation setbacks and clearances);
  - as shown on the Drawings; or
  - in the Road Landscape Manual - Appendix 4, where not shown on the Drawings
- PLANT: Sufficient plant tags shall be left on plants to allow identification of each plant species in any given area.
- STAKING: Where staking within 5m of hardstand areas, stakes are to be installed parallel to the hardstand area.
- BROADACRE: The areas beyond the toe of a fill embankment or top of a cut batter that have been disturbed.
- CONTAINED AREAS: Medians, separators and planting beds bordered by garden edging.
- DIMENSIONS are in millimetres unless shown otherwise.

### ASSOCIATED DEPARTMENTAL DOCUMENTS:

Standard Drawings  
Specifications  
Road Landscape Manual

### REFERENCED DOCUMENTS:

Departmental Standard Drawings:  
1643 Vegetation Ground Works - Planting Container Stock - Kerbed Medians and Separators  
1644 Vegetation Ground Works - Hardstand Abutments to Vegetation Works  
1651 Vegetation Works - Seeding

Departmental Specifications:  
MRTS16 Landscape and Revegetation Works

|   |   |  |   |
|---|---|--|---|
| Department of Transport and Main Roads      |   | <p>© The State of Queensland (Department of Transport and Main Roads) 2017<br/><a href="http://creativecommons.org/licenses/by/3.0/au">http://creativecommons.org/licenses/by/3.0/au</a></p> |   |
| VEGETATION WORKS                            |   |  |   |
| PLANTING CONTAINER STOCK<br>< 25L CONTAINER |   | A3<br>Not to Scale   | Standard Drawing No<br><b>1653</b><br>Date 7/17 |
| A   | B | C  | D   |