


PLAN
GENERAL LAYOUT - SKEWED BRIDGE

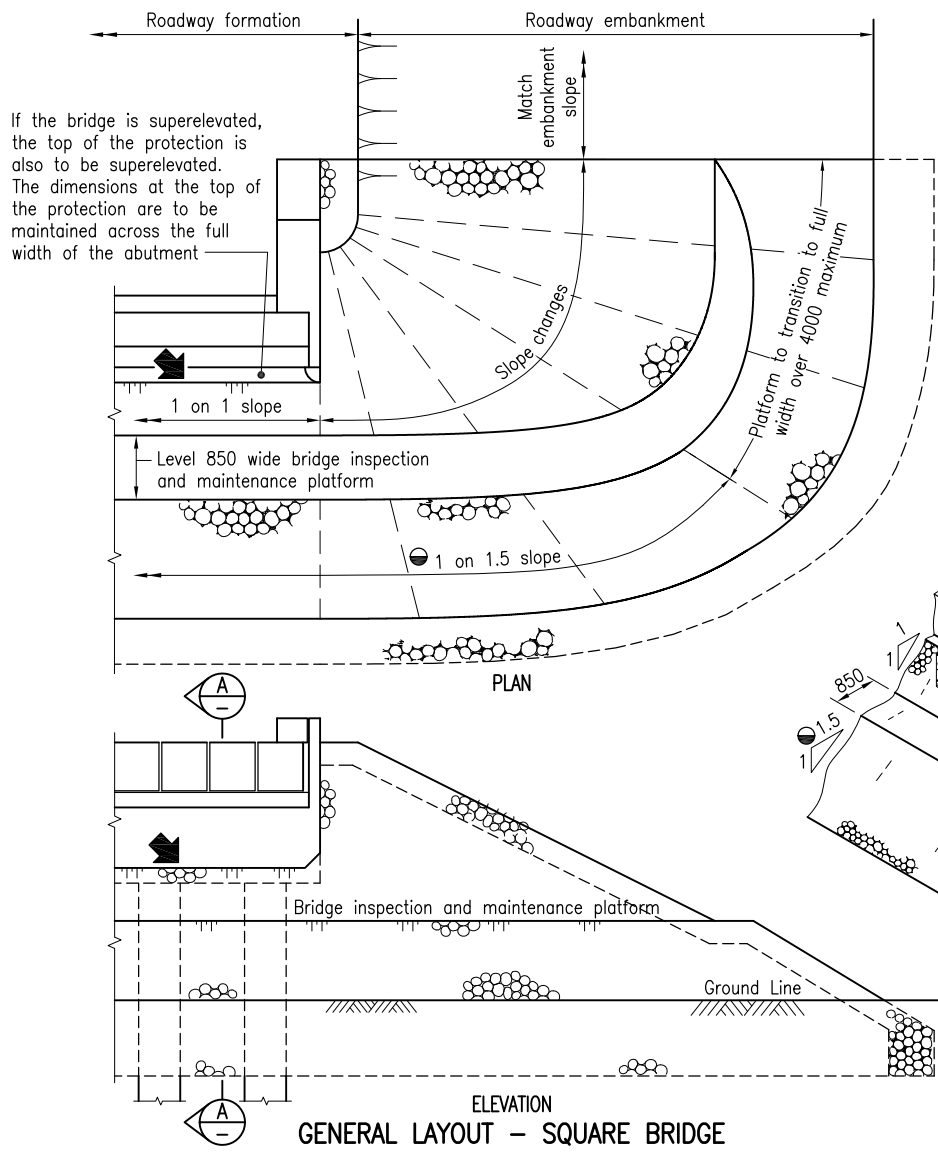

PLAN
GENERAL LAYOUT - SQUARE BRIDGE


DESIGN CRITERIA

The purpose of this drawing is to provide standard details only and fitness for purpose shall conform to AS 5100. The project specific details shall be determined and certified by the bridge design engineer. Because every abutment protection is designed to suit its specific location, this drawing shall be read in conjunction with the project specific drawings.

In accordance with Workplace Health and Safety requirements, abutment headstocks must be easily accessible to allow them to be inspected and maintained. Where the clearance is no greater than 1700 high, this can be done by walking around the base of the protection (refer to Standard Drawing 2236). If the clearance is greater than 1700, a platform shall be provided 1700 from the underside of the bridge.



Provided that the roadway embankment is no steeper than 1 on 2, access to the platform shall be by walking down the side of the protection. If the embankment is steeper than 1 on 2, a risk assessment shall determine the best method of accessing the platform. This may be by constructing a staircase in the protection and/or by casting inserts into the headstock to attach a safety harness (refer DETAIL 1). Roadway embankments steeper than 1 on 2 must be protected.

When designing abutment protection, consideration must be given to the strength of the subgrade material. The rockwork shall be placed to profile before the deck units/girders are erected on the end span. Toe walls (Types A and B) are only suitable for low scour situations. The protection may need to be modified in high scour situations.

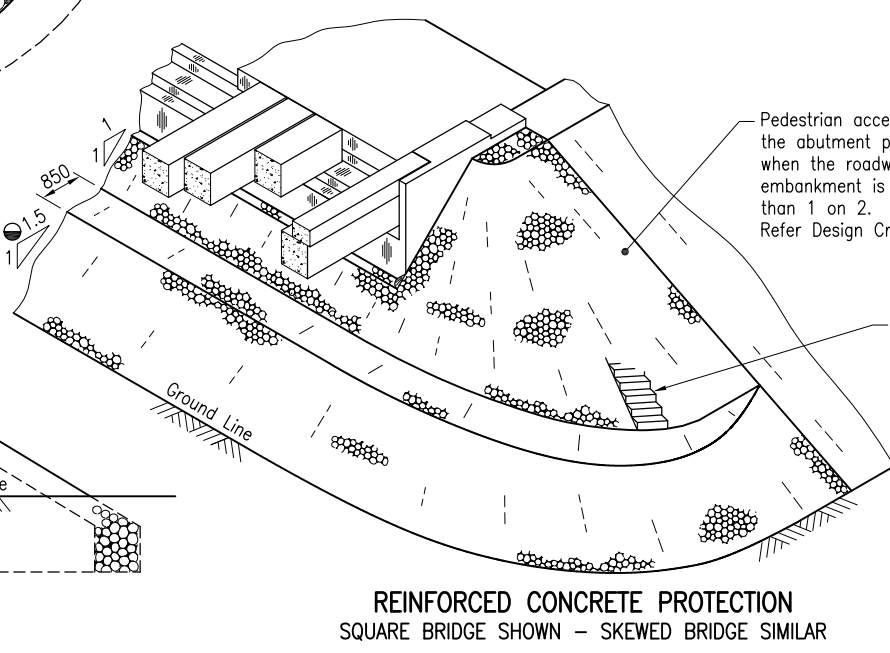

SQUARE BRIDGE SHOWN - SKEWED BRIDGE SIMILAR


Grade 316 Stainless Steel M20 eyebolts and cast-in ferrules to MRTS78A with minimum load rating of 21kN shall be attached to support a safety harness for inspection and maintenance. Cast-in ferrules shall be at 1500 crs maximum. For location details refer to the project specific bridge drawings. Eyebolts shall be attached at the time of completion of the construction.

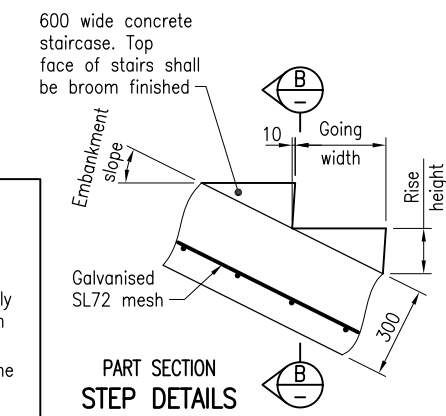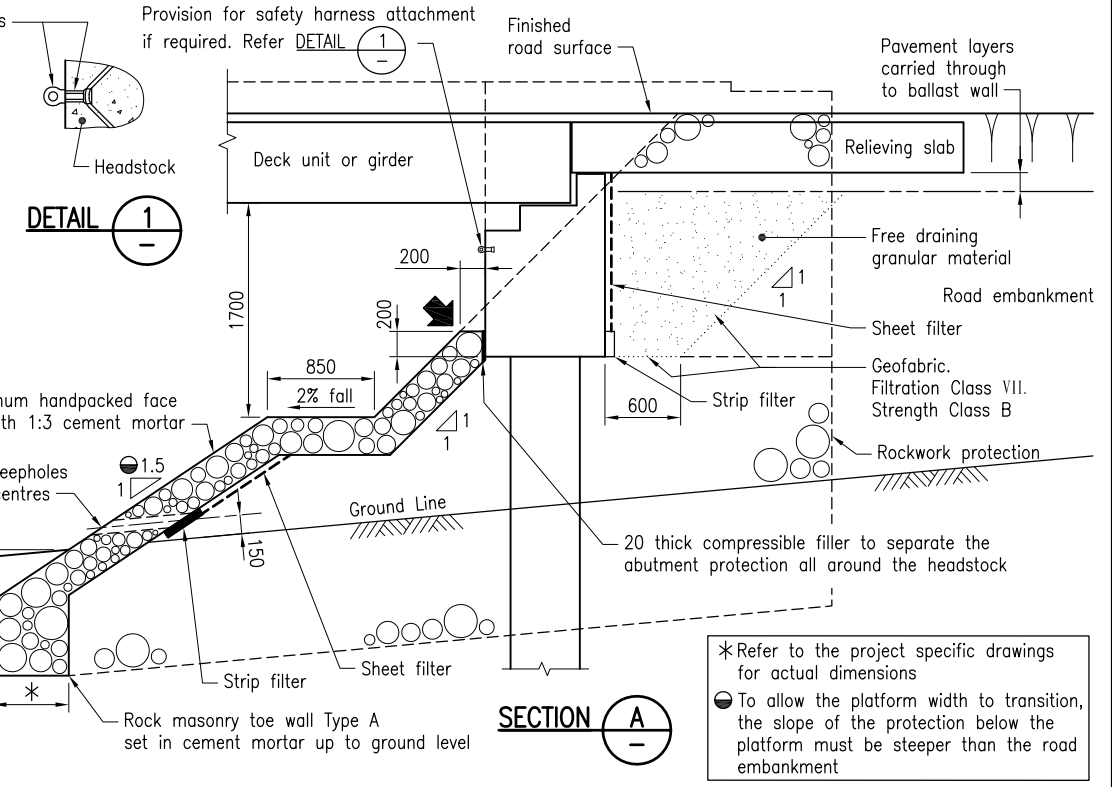

STAIR DIMENSIONS

★ Embankment slope	Going width	Rise height
1 on 1 (45°)	215	215
1 on 1.5 (33.7°)	263	175
1 on 2 (26.6°)	300	150

★ Refer to AS 1657 for step details for alternate slopes

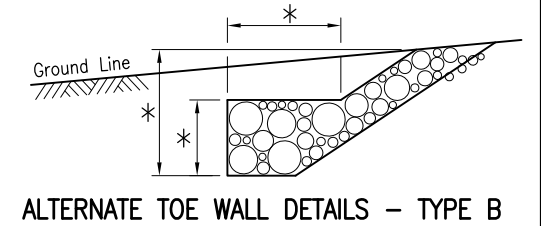

- NOTES:**
- Refer Design Criteria for Bridges and Other Structures for the abutment protection type selection criteria. Construction of abutment protection shall be in accordance with MRTS03.
 - Geotechnical Factor of Safety for batter stability shall be in accordance with Geotechnical Design Standards Minimum Requirements.
 - CONCRETE shall be in accordance with MRTS70. Design life 50 years. Concrete class S32/20. Exposure classification B2, to AS 5100.
 - REINFORCING STEEL shall be read in conjunction with Standard Drawing 1044, shall be in accordance with MRTS71 and to AS/NZS 4671, and ACRS certified. Round bars Grade R250N. Mesh Grade D500L. Reinforcing Steel welding shall be in accordance with Standard Drawing 1044.
 - DIMENSIONS are in millimetres unless shown otherwise.
 - SETTING OUT POINTS shown thus

- ASSOCIATED DEPARTMENTAL DOCUMENTS:**
 Bridge Scour Manual; Design Criteria for Bridges and Other Structures; Geotechnical Design Standards Minimum Requirements
- REFERENCED DOCUMENTS:**
 Departmental Standard Drawings:
 1044 Reinforcing Steel - Lap Lengths
 2236 Abutment Protection - Type 4 - Rockwork Over Spillthrough - up to 1700 Clearance
- Departmental Specifications:**
 MRTS03 Drainage, Retaining Structures and Protective Treatments;
 MRTS70 Concrete; MRTS71 Reinforcing Steel;
 MRTS78A Fabrication of Structural Stainless Steelwork
- Legislation:**
 Work Health and Safety Act 2011; Work Health and Safety Regulations 2011

The purpose of This Standard Drawing is to provide typical standard details. The fitness for purpose of these details for a specific project shall be designed and certified by an RPEQ. The details specific to the project location shall be shown on the project specific drawings.

Department of Transport and Main Roads			
ABUTMENT PROTECTION			
TYPE 4 - ROCKWORK OVER SPILLTHROUGH - GREATER THAN 1700 CLEARANCE		A3	Standard Drawing No
		Not to Scale	2237
		A	Date 11/19