

Queensland Manual of Uniform Traffic Control Devices

Part 2: Traffic control devices for general use

May 2026

Copyright

© The State of Queensland (Department of Transport and Main Roads) 2026.

Licence



This work is licensed by the State of Queensland (Department of Transport and Main Roads) under a Creative Commons Attribution (CC BY) 4.0 International licence.

CC BY licence summary statement

In essence, you are free to copy, communicate and adapt this work, as long as you attribute the work to the State of Queensland (Department of Transport and Main Roads). To view a copy of this licence, visit: <https://creativecommons.org/licenses/by/4.0/>

Translating and interpreting assistance



The Queensland Government is committed to providing accessible services to Queenslanders from all cultural and linguistic backgrounds. If you have difficulty understanding this publication and need a translator, please call the Translating and Interpreting Service (TIS National) on 13 14 50 and ask them to telephone the Queensland Department of Transport and Main Roads on 13 74 68.

Disclaimer

While every care has been taken in preparing this publication, the State of Queensland accepts no responsibility for decisions or actions taken as a result of any data, information, statement or advice, expressed or implied, contained within. To the best of our knowledge, the content was correct at the time of publishing.

Feedback

Please send your feedback regarding this document to: tmr.techdocs@tmr.qld.gov.au

About this document

This document specifies requirements for regulatory and warning signs, pavement markings and other devices for general use on roads, including expressway type roads and sets out the way they are applied at intersections and interchanges, between intersections and at a number of specific situations, including substandard horizontal and vertical curves, approaches to structures and obstructions, changes in pavement width, climbing and overtaking lanes, steep grades and water crossings.

How to use this document

This document is designed to be read and applied together with AS 1742.2-2022 *Manual of Uniform Traffic Control Devices Part 2* (AS 1742.2-2022). You must have access to the Australian Standard to understand what applies in Queensland.

This document:

- sets out how AS 1742.2-2022 applies in Queensland
- has precedence over AS 1742.2-2022 when applied in Queensland, and
- has the same section and clause numbering and headings as AS 1742.2-2022.

The following table summarises the relationship between AS 1742.2-2022 and this document:

Applicability	Meaning
Accepted	The Australian Standard section or clause is accepted.
Accepted, with amendments	Part or all of the section or clause has been accepted with additions, deletions or differences.
New	There is no equivalent section or clause in the Australian Standard.
Not accepted	The Australian Standard section or clause is not accepted.

References

The following references apply when reading AS 1742.2-2022.

Reference to...	Means
AS 1742.2-2022	<p>AS 1742.2-2022, as amended by this document</p> <p>For example, a reference to AS 1742.2-2022 means you must refer to the Australian Standard Part 2, and Part 2 of the Queensland <i>Manual of Uniform Traffic Control Devices</i> (Queensland MUTCD).</p> <p>Throughout AS 1742.2-2022, references are made to other parts of the Australian Standards (for example, when reading Part 2 you may be referred to Part 3 for further information.) In this case, you must refer to the equivalent Part within the Queensland MUTCD first. Check the applicability of the equivalent Part in the Queensland MUTCD before referring to the referenced Australian Standard Part.</p>
QGTM	<i>Queensland Guide to Traffic Management</i>
QGTTM	<i>Queensland Guide to Temporary Traffic Management</i>
Queensland (Q) series / Traffic Control (TC) signs	<p>The TC signs are a collection of non-standard traffic control (TC) signs that have been 'officially approved' as required by the <i>Transport Operations (Road Use Management) Act 1995</i>. Included in this register are the MUTCD Q-series signs.</p>
RPDM	<i>Road Planning and Design Manual, 2nd Edition</i>
TORUM Act	<i>Transport Operations (Road Use Management) Act 1995 (Qld)</i>

Relationship table

Section	Clause	Description	Applicability
1	Scope and general		
	1.1	Scope	Accepted
	1.2	Application	Accepted
	1.3	Normative references	Accepted, with amendments
	1.4	Terms and definitions	Accepted
	1.4.1	<i>85th percentile speed</i> <i>V₈₅</i>	Accepted
	1.4.2	<i>annual average daily traffic</i> <i>AADT</i>	Accepted
	1.4.3	<i>expressway type road</i> <i>expressway</i>	Accepted
	1.4.4	<i>major road</i>	Accepted
	1.4.5	<i>may</i>	Accepted
	1.4.6	<i>merge</i>	Accepted
	1.4.7	<i>minor road</i>	Accepted
	1.4.8	<i>relevant authority</i>	Accepted
	1.4.9	<i>shall</i>	Accepted
	1.4.10	<i>should</i>	Accepted
	1.4.11	<i>stopping sight distance</i> <i>SSD</i>	Accepted
	1.4.12	<i>traffic control device</i>	Accepted
	1.4.13	<i>travelled way</i>	Accepted
	1.4.14	<i>zip merge</i>	Accepted
	1.4.15	<i>Innovative treatments</i>	New
	1.5	Specification of signs, markings and delineators	Accepted
	1.6	Responsibility and authority for installation	Accepted
	1.7	General principles	
	1.7.1	<i>Basic principles for all traffic control devices</i>	Accepted
1.7.2	<i>Specific principles for signs</i>		
1.7.2.1	General	Accepted	

Section	Clause	Description	Applicability
	1.7.2.2	Reflectorization and illumination	Accepted
	1.7.2.3	Installation and location of signs	Accepted
	1.7.2.4	Non-standard signs and devices	Accepted, with amendments
	1.7.2.5	Excessive use	Accepted
	1.7.2.6	Safety aspects	Accepted
	1.7.2.7	Electronic signs	Accepted
2	Treatment at intersections		
	2.1	Scope of section	Accepted
	2.2	Devices used	Accepted
	2.3	Movement control, direction control and advance warning	Accepted
	2.4	Application of devices	Accepted
	2.5	GIVE WAY sign and STOP sign control	
	2.5.1	<i>General</i>	Accepted
	2.5.2	<i>Application</i>	Accepted
	2.5.3	<i>Requirements for installation of STOP signs</i>	Accepted
	2.5.4	<i>Signs for give way and stop control</i>	Accepted
	2.5.5	<i>Advance warning signs for give way and stop control</i>	Accepted
	2.6	Roundabout control	
	2.6.1	<i>General</i>	Accepted
	2.6.2	<i>Application</i>	Accepted
	2.6.3	<i>Signs for roundabout control</i>	Accepted
	2.6.4	<i>Advance warning signs and hazard marker signs for roundabouts</i>	Accepted
	2.7	Control by traffic signals	Accepted
	2.8	Direction control at intersections	
	2.8.1	<i>General</i>	Accepted
	2.8.2	<i>Signs for the restriction of travel direction</i>	Accepted, with amendments
2.8.3	<i>Application of turn prohibition signs</i>	Accepted	
2.8.4	<i>Signs for the prohibition of turns</i>	Accepted	

Section	Clause	Description	Applicability
	2.8.5	<i>Signs for specific turn control</i>	Accepted, with amendments
	2.8.6	<i>Supplementary signs</i>	Accepted, with amendments
	2.8.7	<i>Signs for other direction instruction</i>	Accepted, with amendments
	2.9	Advance warning of intersections	
	2.9.1	<i>General</i>	Accepted
	2.9.2	<i>Application</i>	Accepted
	2.9.3	<i>Signs (on the major road) for warning of a cross road intersection</i>	Accepted
	2.9.4	<i>Signs (on the minor road) for warning of a T-intersection</i>	Accepted
	2.9.5	<i>Signs (on the major road) for warning of a side road intersection</i>	Accepted, with amendments
	2.9.6	<i>Signs (on the major road) for warning of staggered and successive side road intersections</i>	Accepted
	2.9.7	<i>Signs (on the major road) for warning of a modified intersection</i>	Accepted
	2.9.8	<i>Signs for warning of merges and added lanes from intersections</i>	Accepted
	2.9.9	<i>Signs for warning of private driveways</i>	Accepted, with amendments
	2.10	Advance warning of intersection traffic control devices	
	2.10.1	<i>General</i>	Accepted
	2.10.2	<i>Application</i>	Accepted
	2.10.3	<i>Signs for advance warning of intersection traffic control devices</i>	Accepted
	2.11	Pavement markings at intersections	Accepted
	2.12	Hazard marker signs and other devices	
	2.12.1	<i>Hazard marker signs</i>	Accepted
2.12.2	<i>Sight boards</i>	Accepted	
2.12.3	<i>Kerb markings</i>	Accepted	
2.12.4	<i>Pavement bars and markings</i>	Accepted	

Section	Clause	Description	Applicability
	2.13	Typical arrangement diagrams for intersections	Accepted
	2.14	Typical arrangement diagrams	Accepted
3	Treatments at expressway interchanges and terminals		
	3.1	Scope of section	Accepted
	3.2	General	Accepted
	3.3	Intersection control at ramp terminals	Accepted
	3.4	Control of movement and traffic access at ramp terminals	
	3.4.1	<i>General</i>	Accepted
	3.4.2	<i>Signs for wrong way movement control</i>	Accepted
	3.4.3	<i>Signs for the regulatory control of expressway use and access</i>	Accepted, with amendments
	3.5	Direction control and guidance of traffic on expressways at and near interchanges	
	3.5.1	<i>General</i>	Accepted
	3.5.2	<i>Signs for control of traffic entering or leaving the expressway</i>	Accepted, with amendments
	3.5.3	<i>Signs for the guidance of traffic entering or leaving the expressway</i>	Accepted
	3.6	Advance warning of expressway terminals	
	3.6.1	<i>General</i>	Accepted
	3.6.2	<i>Signs for the advance warning of expressway terminals</i>	Accepted
	3.7	Pavement markings on expressways and at entrance and exit ramps	Accepted
	3.8	Signs and pavement markings at interchanges and terminals	
	3.8.1	<i>General</i>	Accepted
3.8.2	<i>Typical arrangement diagrams</i>	Accepted	
4	Treatments between intersections		
	4.1	Scope of section	Accepted
	4.2	Pavement markings and delineation	
	4.2.1	<i>General</i>	Accepted

Section	Clause	Description	Applicability
	4.2.2	<i>General treatment</i>	
	4.2.2.1	Rural road – undivided	Accepted
	4.2.2.2	Rural roads – divided, including rural expressways	Accepted
	4.2.2.3	Urban roads – undivided	Accepted
	4.2.2.4	Urban roads – divided and one-way roadways	Accepted
	4.2.3	<i>No overtaking zones (Barrier lines)</i>	Accepted
	4.2.4	<i>Guide posts</i>	
	4.2.4.1	General	Accepted
	4.2.4.2	Design and construction	Accepted, with amendments
	4.2.4.3	Siting and alignment	Accepted
	4.2.4.4	Longitudinal spacing	Accepted, with amendments
	4.2.5	<i>Delineators</i>	
	4.2.5.1	General	Accepted
	4.2.5.2	Colour	Accepted
	4.2.5.3	Performance requirements	Accepted
	4.2.5.4	Mounting locations	Accepted
	4.2.6	<i>Snow poles</i>	Accepted
	4.2.7	<i>Maintenance marker posts</i>	New
	4.3	Treatment of substandard horizontal curves	
	4.3.1	<i>General</i>	Accepted
	4.3.2	<i>Horizontal curves which are not substandard</i>	Accepted
	4.3.3	<i>Determination of warning signs on curves</i>	Accepted
	4.3.4	<i>Determination of advisory speed and associated signs</i>	
	4.3.4.1	General	Accepted
	4.3.4.2	Determination of advisory speeds on horizontal curves	Accepted
	4.3.4.3	Application of Advisory Speed signs on horizontal curves	Accepted

Section	Clause	Description	Applicability
	4.3.5	<i>Signs for substandard horizontal curves</i>	Accepted, with amendments
	4.3.6	<i>Determination for the use of Curve Alignment Marker signs</i>	
	4.3.6.1	General	Accepted
	4.3.6.2	Curve Alignment Marker signs	Accepted, with amendments
	4.3.6.3	Typical arrangement diagrams	Accepted
	4.4	Treatment of substandard vertical curves	
	4.4.1	<i>General</i>	Accepted
	4.4.2	<i>Substandard stopping sight distance</i>	Accepted
	4.4.3	<i>Crests, dips and humps</i>	Accepted
	4.4.4	<i>Advisory speeds on substandard vertical curves</i>	
	4.4.4.1	General	Accepted
	4.4.4.2	Determination of advisory speeds on vertical curves	Accepted
	4.4.4.3	Application of Advisory speed signs on vertical curves	Accepted
	4.4.5	<i>Signs for substandard vertical curves</i>	Accepted
	4.5	Treatment of approaches to structures and obstructions	
	4.5.1	<i>General</i>	Accepted
	4.5.2	<i>Bridges</i>	
	4.5.2.1	Bridges with more than one lane	Accepted
	4.5.2.2	One-lane bridges on two-way roadways	Accepted
	4.5.2.3	Signalization of one-lane bridges	Accepted
	4.5.2.4	Load and vehicle dimension limitations	Accepted
	4.5.2.5	Speed limits on bridges	Accepted
	4.5.3	<i>Subways and underpasses</i>	
	4.5.3.1	General	Accepted
	4.5.3.2	Height restrictions	Accepted
	4.5.4	<i>Gates, grids and culverts</i>	
	4.5.4.1	Gates	Accepted

Section	Clause	Description	Applicability
	4.5.4.2	Grids	Accepted
	4.5.4.3	Culverts	Accepted
	4.5.4.4	Isolated pavement width restrictions	Accepted
	4.5.5	<i>Obstructions within the roadway</i>	Accepted
	4.5.6	<i>Signs for approaches to structures and obstructions</i>	
	4.5.6.1	Regulatory signs	Accepted, with amendments
	4.5.6.2	Detour signs	Accepted, with amendments
	4.5.6.3	Warning signs	Accepted, with amendments
	4.5.6.4	Speed limit signs on bridges	Accepted
	4.5.7	<i>Hazard marker signs</i>	
	4.5.7.1	General	Accepted
	4.5.7.2	Types of hazard marker signs	Accepted
	4.6	Changes in pavement width	
	4.6.1	<i>General</i>	Accepted
	4.6.2	<i>General treatments at lane reductions (merges)</i>	Accepted
	4.6.3	<i>Narrowing of a roadway</i>	
	4.6.3.1	Narrowing of two-lane road	Accepted
	4.6.3.2	Transition from four-lane road to two-lane road (both undivided)	Accepted
	4.6.4	<i>Transition of divided road to undivided road</i>	
	4.6.4.1	General	Accepted
	4.6.4.2	Typical arrangement diagrams	Accepted
	4.6.5	<i>Signs for lane reductions (merges) and approaches to changes in pavement width</i>	
	4.6.5.1	Signs for zip merges	Accepted
	4.6.5.2	Signs for lane changes	Accepted, with amendments
	4.6.5.3	Signs for approaches to changes in pavement width	Accepted
	4.6.5.4	Signs at the beginning and end of divided roads	Accepted

Section	Clause	Description	Applicability
	4.7	Overtaking lanes, climbing lanes and turnouts	
	4.7.1	<i>General</i>	Accepted
	4.7.2	<i>Signs for overtaking lanes, climbing lanes and turnouts</i>	Accepted
	4.7.3	<i>Typical arrangement diagrams</i>	Accepted
	4.8	Steep grades and safety ramps	
	4.8.1	<i>General</i>	Accepted
	4.8.2	<i>Signs for steep descents</i>	Accepted
	4.8.3	<i>Signs for steep climbs</i>	Accepted
	4.8.4	<i>Signs for safety ramps</i>	Accepted
	4.9	Water crossings	
	4.9.1	<i>General</i>	Accepted
	4.9.2	<i>Ferries and opening bridges</i>	Accepted
	4.9.3	<i>Fords</i>	Accepted
	4.9.4	<i>Floodways</i>	Accepted
	4.9.5	<i>Low level bridges</i>	Accepted
	4.9.6	<i>Signs for water crossings</i>	Accepted, with amendments
	4.10	Road block barriers	
	4.10.1	<i>Application</i>	Accepted
	4.10.2	<i>Construction and location</i>	Accepted
	4.10.3	<i>Associated device and marking</i>	Accepted, with amendments
	4.11	Physical obstructions, road conditions and other hazards	
	4.11.1	<i>General</i>	Accepted
	4.11.2	<i>Signs for warning of physical obstructions</i>	Accepted
	4.11.3	<i>Signs for warning of hazardous road conditions</i>	Accepted, with amendments
	4.11.4	<i>Signs for warning of unexpected vehicles</i>	Accepted, with amendments
	4.11.5	<i>Signs for warning of wandering stock</i>	Accepted, with amendments

Section	Clause	Description	Applicability
	4.11.6	<i>Signs for warning of hazardous wildlife</i>	Accepted, with amendments
	4.11.6.1	Wildlife warning signs	New
	4.11.6.2	Temporary wildlife warning signs	New
	4.11.6.3	High-impact wildlife warning signs	New
	4.11.6.5	Wildlife threshold pavement marking	New
	4.11.6.5	Significant Wildlife Conservation Area (WCA) signing	New
	4.11.6.6	RRPMs	New
	4.11.6.7	Vehicle-activated devices	New
	4.11.7	<i>Signs for warning of temporary or part time hazards</i>	Accepted, with amendments
	4.11.8	<i>Vehicle mounted signs</i>	Accepted, with amendments
	4.11.9	<i>Signs to supplement standard warning signs</i>	Accepted
	4.12	Miscellaneous signs	
	4.12.1	<i>General</i>	Accepted
	4.12.2	<i>Miscellaneous regulatory signs</i>	Accepted, with amendments
	4.12.3	<i>Heavy vehicle control and information signs</i>	Accepted, with amendments
	4.12.4	<i>Emergency access location signs</i>	Accepted, with amendments
	4.12.5	<i>Signs for warning of cane vehicles</i>	New
	4.13	Variable use lane signs	Accepted
5	Pavement markings		
	5.1	Scope of section	Accepted
	5.2	General principles	
	5.2.1	<i>Purpose</i>	Accepted
	5.2.2	<i>Removal of markings</i>	Accepted
	5.2.3	<i>Limitations</i>	Accepted
	5.2.4	<i>Types of markings</i>	Accepted
	5.2.5	<i>Pavement marking materials and reflectorization</i>	Accepted

Section	Clause	Description	Applicability
	5.2.6	<i>Colours</i>	Accepted
	5.2.7	<i>Size of markings</i>	Accepted
	5.2.8	<i>Audio-tactile line marking</i>	Accepted
	5.3	Longitudinal lines	
	5.3.1	<i>General</i>	Accepted
	5.3.2	<i>Dividing lines</i>	
	5.3.2.1	General	Accepted
	5.3.2.2	Application of dividing lines	Accepted
	5.3.3	<i>Barrier lines</i>	
	5.3.3.1	General	Accepted
	5.3.3.2	Application of barrier lines	Accepted
	5.3.3.3	Location and setting out	Accepted
	5.3.3.4	Modification of barrier line requirements	Accepted
	5.3.3.5	Checking marked barrier lines	Accepted
	5.3.4	<i>Lane lines</i>	Accepted
	5.3.5	<i>Edge lines</i>	Accepted
	5.3.6	<i>Continuity lines</i>	Accepted
	5.3.7	<i>Turn lines</i>	Accepted
	5.3.8	<i>Outline markings</i>	Accepted
	5.3.9	<i>Longitudinal lines at intersections and roundabouts</i>	Accepted
	5.3.10	<i>Audio-tactile line marking</i>	
	5.3.10.1	General	Accepted, with amendments
	5.3.10.2	Noise considerations	Accepted
	5.3.10.3	Audio-tactile edge line	Accepted
	5.3.10.4	Audio-tactile dividing line	Accepted
	5.4	Wide centre line treatment	
	5.4.1	<i>General</i>	Accepted
	5.4.2	<i>Application</i>	
	5.4.2.1	General	Accepted, with amendments

Section	Clause	Description	Applicability
	5.4.2.2	Width	Accepted, with amendments
	5.4.2.3	Start and end transitions	Accepted, with amendments
	5.4.2.4	Between intersections	Accepted
	5.4.2.5	At intersections and driveways	Accepted
	5.4.2.6	Transitions at narrow structures and overtaking lanes	Accepted, with amendments
	5.4.2.7	Sign requirements	Accepted, with amendments
	5.5	Transverse lines	
	5.5.1	<i>General</i>	Accepted
	5.5.2	<i>Give way lines</i>	Accepted, with amendments
	5.5.3	<i>Stop lines</i>	Accepted
	5.5.4	<i>Positioning of lines at GIVE WAY and STOP signs</i>	Accepted
	5.5.5	<i>Pedestrian control and protection markings</i>	
	5.5.5.1	Pedestrian guide lines	Accepted
	5.5.5.2	Pedestrian crossing (zebra)	Accepted
	5.5.6	<i>Road hump markings</i>	Accepted
	5.5.7	<i>Kerb markings</i>	Accepted
	5.6	Diagonal and chevron markings	
	5.6.1	<i>General</i>	Accepted
	5.6.2	<i>Markings on splayed approaches</i>	Accepted
	5.6.3	<i>Diagonal markings on shoulders</i>	Accepted
	5.6.4	<i>Painted islands and medians</i>	Accepted
	5.6.5	<i>Bicycle lane safety strip</i>	Accepted
	5.6.6	<i>Yellow box marking</i>	Accepted
	5.7	Pavement arrows	
	5.7.1	<i>General</i>	Accepted
	5.7.2	<i>Intersection arrows</i>	Accepted
	5.7.3	<i>Lane change arrows</i>	Accepted

Section	Clause	Description	Applicability
	5.7.4	<i>Pavement arrows approaching and on expressway exit ramps</i>	Accepted
	5.8	Messages on pavements	
	5.8.1	<i>General</i>	Accepted
	5.8.2	<i>Words and numerals</i>	Accepted
	5.8.3	<i>Word messages</i>	Accepted
	5.8.4	<i>Symbols</i>	Accepted
	5.8.5	<i>KEEP CLEAR marking</i>	Accepted, with amendments
	5.9	Raised pavement markers	
	5.9.1	<i>General</i>	Accepted
	5.9.2	<i>Retroreflective raised pavement markers (RRPMs)</i>	Accepted
	5.9.3	<i>Non retroreflective raised pavement markers (NRPMs)</i>	Accepted
	5.9.4	<i>Internally illuminated pavement markers (IIPMs)</i>	Accepted
	5.9.5	<i>Application of raised pavement markers</i>	
	5.9.5.1	Positioning and spacing of markers	Accepted
	5.9.5.2	Augmenting painted lines	Accepted with amendments
	5.9.5.3	Lane guidance through intersections	Accepted
	5.10	Pavement bars	
	5.10.1	<i>General</i>	Accepted
	5.10.2	<i>Design and installation</i>	Accepted
	5.10.3	<i>Typical uses</i>	Accepted
	5.11	Pavement markings at entrance and exit ramps	
	5.11.1	<i>Entrance and exit ramp layouts</i>	Accepted
	5.11.2	<i>Exit ramp nose marking</i>	Accepted
	5.11.3	<i>Entrance ramp nose marking</i>	Accepted
	5.11.4	<i>Expressway exit lane arrows</i>	Accepted
	5.11.5	<i>Pavement arrows on exit ramps</i>	Accepted
	5.11.6	<i>Step-out marking</i>	Accepted
	5.11.7	<i>Exit ramp marking</i>	New

Section	Clause	Description	Applicability
Appendices			
A (informative)	Guide to the determination of 85 th percentile speed		
	A.1	General	Accepted
	A.2	Data collection	
	A.2.1	<i>Conditions for data collection</i>	Accepted
	A.2.2	<i>Sample size</i>	Accepted
	A.3	Data recording	Accepted
	A.4	Data analysis	
	A.4.1	<i>85th percentile speed</i>	Accepted
B (informative)	Sign size selection		
	B.1	Scope	Accepted
	B.2	Size of signs	Accepted
	B.3	General principles for size selection	Accepted
C (normative)	Reflectorization and illumination of signs		
	C.1	Scope	Accepted
	C.2	General	Accepted
	C.3	Means of reflectorization	Accepted
	C.4	Means of illumination	Accepted
D (normative)	Installation and location of signs		
	D.1	Scope	Accepted
	D.2	Sign location	
	D.2.1	<i>General</i>	Accepted
	D.2.2	<i>Longitudinal placement</i>	Accepted
	D.2.3	<i>Lateral placement and height</i>	
	D.2.3.1	General	Accepted
	D.2.3.2	Lateral placement - rural	Accepted
	D.2.3.3	Lateral placement - urban	Accepted
	D.2.3.4	Height - rural	Accepted
	D.2.3.5	Height - urban	Accepted
	D.2.3.6	Overhead mounting	Accepted

Section	Clause	Description	Applicability
	D.2.3.7	Typical arrangement diagrams	Accepted
	D.2.4	<i>Overhead signs</i>	Accepted
	D.3	Sign orientation	Accepted
	D.4	Signpost selection	
	D.4.1	<i>General</i>	Accepted
	D.4.2	<i>Small size posts</i>	Accepted
	D.4.3	<i>Large non-frangible posts</i>	Accepted
	D.4.4	<i>Large frangible posts</i>	Accepted
	D.4.5	<i>Sign post selection guide</i>	Accepted
E (informative)	Use of enhancement treatments for warning signs		Accepted
F (normative)	Determination of advisory speeds on horizontal curves		
	F.1	Scope	Accepted
	F.2	Principle	Accepted
	F.3	Equipment	
	F.3.1	<i>Ball bank indicator</i>	Accepted
	F.3.2	<i>Other devices</i>	Accepted
	F.4	Procedure	Accepted
	F.5	Advisory speed adjustment	Accepted
F.6	Report	Accepted	
G (informative)	Determination of advisory speeds on vertical curves		
	G.1	Scope	Accepted
	G.2	Principle	Accepted
G.3	Method	Accepted	
H (informative)	Signs for wildlife awareness		Accepted, with amendments

Section	Clause	Description	Applicability
I (normative)		Signs and markings where a major road turns or curves left	
	I.1	General and scope	Accepted
	I.2	Purpose	Accepted
	I.3	Principles	Accepted
	I.4	Application	
	<i>I.4.1</i>	<i>General</i>	Accepted
	<i>I.4.2</i>	<i>Crossroads</i>	Accepted
	<i>I.4.3</i>	<i>T intersections</i>	Accepted
	<i>I.4.4</i>	<i>Curved road intersections with a straight road</i>	Accepted
	<i>I.4.5</i>	<i>Typical arrangement diagrams</i>	Accepted

Contents

About this document	i
How to use this document	i
References	ii
Relationship table	iii
1 Scope and general	1
1.3 Normative references.....	1
1.4 Terms and definitions	1
1.4.15 <i>Innovative treatments</i>	1
1.7 General principles	2
1.7.2 <i>Specific principles for signs</i>	2
2 Treatments at intersections	2
2.8 Direction control at intersections.....	2
2.8.2 <i>Signs for the restriction of travel direction</i>	2
2.8.5 <i>Signs for specific turn control</i>	3
2.8.6 <i>Supplementary signs</i>	3
2.8.7 <i>Signs for other direction instructions</i>	5
2.9 Advance warning of intersections.....	5
2.9.5 <i>Signs (on the major road) for warning of a side road intersection</i>	5
2.9.9 <i>Signs for warning of private driveways</i>	6
3 Treatments at expressway interchanges and terminals	6
3.4 Control of movement and traffic access at ramp terminals.....	6
3.4.3 <i>Signs for the regulatory control of expressway use and access</i>	6
3.5 Direction control and guidance of traffic on expressways at and near interchanges....	7
3.5.2 <i>Signs for control of traffic entering or leaving the expressway</i>	7
4 Treatments between intersections	7
4.2 Pavement markings and delineation.....	7
4.2.4 <i>Guide posts</i>	7
4.2.7 <i>Maintenance marker posts</i>	8
4.3 Treatment of substandard horizontal curves	8
4.3.5 <i>Signs for substandard horizontal curves</i>	8
4.3.6 <i>Determination for the use of Curve Alignment Marker signs</i>	9
4.5 Treatment of approaches to structures and obstructions	10
4.5.6 <i>Signs for approaches to structures and obstructions</i>	10
4.6 Changes in pavement width	12
4.6.5 <i>Signs for lane reductions (merges) and approaches to changes in pavement width</i>	

4.9	Water crossings.....	12
4.9.6	<i>Signs for water crossings</i>	12
4.10	Road block barriers.....	13
4.10.3	<i>Associated device and marking</i>	13
4.11	Physical obstructions, road conditions and other hazards	13
4.11.3	<i>Signs for warning of hazardous road conditions</i>	13
4.11.5	<i>Signs for warning of wandering stock</i>	16
4.11.6	<i>Signs for warning of hazardous wildlife</i>	16
4.11.7	<i>Signs for warning of temporary or part time hazards</i>	22
4.11.8	<i>Vehicle mounted signs</i>	22
4.12	Miscellaneous signs.....	22
4.12.2	<i>Miscellaneous regulatory signs</i>	22
4.12.3	<i>Heavy vehicle control and information signs</i>	23
4.12.4	<i>Emergency access location signs</i>	24
4.12.5	<i>Signs for warning of cane vehicles</i>	25
5	Pavement markings	26
5.3	Longitudinal lines.....	26
5.3.10	<i>Audio-tactile line marking</i>	26
5.4	Wide centre line treatment	26
5.4.2	<i>Application</i>	26
5.5	Transverse Lines.....	28
5.5.2	<i>Give way lines</i>	28
5.8	Messages on pavements	28
5.8.5	<i>KEEP CLEAR marking</i>	28
5.9	Raised pavement markers.....	28
5.9.5	<i>Application of raised pavement markers</i>	28
5.11	Pavement markings at entrance and exit ramps	29
5.11.7	<i>Exit ramp marking</i>	29
	Appendices	30
	Appendix H: Signs for wildlife awareness (normative)	30
 Figures		
	Figure 4.11.6.3 – Examples of wildlife warning signs with target boards	18
	Figure 5.11.7 – Marking at an exit ramp.....	29

1 Scope and general

1.3 Normative references

Addition

The following referenced documents also apply in Queensland:

- The department's [Traffic Control \(TC\) signs](#) database
- Main Roads Technical Specification [MRTS45 Road Surface Delineation](#)
- Main Roads Technical Specification [MRTS110 Coloured Surface Treatments](#)
- [Road Planning and Design Manual](#) Part 3: Geometric Design
- [Road Planning and Design Manual](#) Part 6: Roadside Design, Safety and Barriers
- [Signing and Line Marking of Heavy Vehicle Interception Sites Guideline](#), and
- Transport Operations (Road Use Management) Act 1995.

1.4 Terms and definitions

1.4.15 Innovative treatments

New

Innovative treatments that provide improved safety, efficiency and/or value-for-money outcomes are encouraged. Such treatments may include:

- a) innovative use of current devices
- b) alternative device layouts using existing and/or improve devices, and/or
- c) new devices or practices.

New or improved devices, treatments, or practices require approval by the Department of Transport and Main Roads prior to their use or adoption.

For trials of new or innovative traffic control devices, treatments or practices, a submission in accordance with the requirements of Clause 1.13 of the Queensland *Manual of Uniform Traffic Control Devices* (Queensland MUTCD) Part 1 shall be submitted to TrafficEngineering.Support@tmr.qld.gov.au.

1.7 General principles

1.7.2 Specific principles for signs

1.7.2.4 Non-standard signs and devices

Addition

For guidance on the use of non-standard traffic signs and devices in Queensland, refer to Clause 1.8 of the Queensland MUTCD Part 1.

2 Treatments at intersections

2.8 Direction control at intersections

2.8.2 Signs for the restriction of travel direction

Addition

- (b) *KEEP LEFT and KEEP RIGHT (R2-3) (L or R)*



Example of R2-3-Q02

The R2-3-Q02 series KEEP LEFT signs shall only be used where the width of a median or island is insufficient to provide adequate clearance to the KEEP LEFT (R2-3) sign.

2.8.5 Signs for specific turn control

Addition

(d) *RIGHT LANE MUST U TURN (R2-9-Q01)*



R2-9-Q01

The RIGHT LANE MUST U TURN (R2-9-Q01) sign should be provided where an exclusive U-turn lane is provided at signalised intersections, and may be provided for exclusive U-turn lanes on higher order unsignalised intersections. Where provided, the sign should be located in the median near the beginning of the merge taper. Where advance information is required (such as in a trap lane scenario) R7-2, R7-12 or R9-8 supplementary plates may be provided along with further installations of R2-9-Q01).

Where a dedicated U-turn facility has been installed, the following signs from the department's Traffic Control Signs Database may be appropriate: TC9632, TC9634, TC9635, and TC9636.

2.8.6 Supplementary signs

Addition


(b) *Exception signs*



R9-Q04_1



R9-Q04_2



R9-Q04_3

Additional exception classes may be used to supplement regulatory signs via the R9-Q04 template.

Where a supplementary plate permits only authorised vehicles to be excepted, a road authority should keep adequate records of which vehicles have been authorised.

Exceptions for the following vehicle classes are permitted for use in Queensland:

CARS	TAXIS	TRAMS	TRUCKS
AUTHORISED BUSES	CONSTRUCTION VEHICLES	[COUNCIL] BUSES	CANE VEHICLES
EMERGENCY VEHICLES	LOCAL DELIVERIES	LOCAL TRAFFIC	POLICE VEHICLES
SCHOOL BUSES	SERVICE VEHICLES	STOCK VEHICLES	T2/T3 VEHICLES
...t GVM AND UNDER	[COUNCIL] AUTHORISED VEHICLES	[COUNCIL] AUTHORISED BUSES	BUSES ... m AND UNDER
BUSES AND CONSTRUCTION VEHICLES	PERSONAL MOBILITY DEVICES	T3 AND TRUCK LANE VEHICLES	TRUCKS ... m AND UNDER
TRANSIT LANE VEHICLES	VEHICLES LONGER THAN ... m	VEHICLES SHORTER THAN ... m	

(d) *Distance and location signs*

ON SIDE ROAD (R9-Q05)



R9-Q05 (L)

The ON SIDE ROAD (R9-Q05) supplementary plate may be used below black on white signs to indicate that a message or requirement applies on a side road.

2.8.7 Signs for other direction instructions

Addition

(c) *THROUGH TRAFFIC KEEP LEFT / RIGHT (R2-Q02)*



R2-Q02 (L)



R2-Q02 (R)

The THROUGH TRAFFIC KEEP LEFT / RIGHT (R2-Q02) signs may be used to direct traffic to the desired side of a diverging road.

2.9 Advance warning of intersections

2.9.5 Signs (on the major road) for warning of a side road intersection

Addition

(d) *Successive Side Road Intersections on a Curve – Outside (W2-Q01) (L and R)*



W2-Q01(L)



W2-Q01(R)

The Successive Side Road Intersections on a Curve – Outside (W2-Q01) sign applies to situations where two successive side roads intersections occur on a curve, and the existence of the curve contributes to the magnitude of the hazard. The number of side roads shown on any one symbol shall be limited to two.

2.9.9 Signs for warning of private driveways

Addition

(b) *SLOW TURNING TRAFFIC (W5-Q17)*



W5-Q17

The SLOW TURNING TRAFFIC (W5-Q17) sign may be used to warn of the possibility of vehicles being inhibited from entering a driveway or property at a normal turning speed due to some form of constraint such as the opening of automatic gateways or pedestrian traffic.

3 Treatments at expressway interchanges and terminals

3.4 *Control of movement and traffic access at ramp terminals*

3.4.3 Signs for the regulatory control of expressway use and access

Addition

Classes of road users that may be displayed on the R6-13 and GE6-2 signs in Queensland include:

- Pedestrians
- Bicycles
- Animals
- Mopeds
- Agricultural Machinery, and
- Personal Mobility Devices

3.5 Direction control and guidance of traffic on expressways at and near interchanges

3.5.2 Signs for control of traffic entering or leaving the expressway

Difference

Replace note to item (d) with the following:

NOTE The S2 symbol shall be used on the sign where help phones are provided.

Addition

- (e) *EMERGENCY STOPPING BAY x m AHEAD (G9-90-1), EMERGENCY STOPPING BAY x km AHEAD (G9-90-2)*



G9-90-Q01

The EMERGENCY STOPPING BAY & HELP PHONE x (m / km) AHEAD (G9-90-Q01) sign shall be used in lieu of the G9-90 series signs where a help phone is available.

4 Treatments between intersections

4.2 Pavement markings and delineation

4.2.4 Guide posts

4.2.4.2 Design and construction

Addition

The Department of Transport and Main Roads has issued a standard drawing for road edge guide posts. Refer to SD1356 *Road Edge Guide Posts – Post and Installation Details*.

4.2.4.4 Longitudinal spacing

Addition

(f): *Bridges and culverts*

Hazard marker posts may be installed to warn road users and maintenance personnel of a hazard in the vicinity of the hazard marker post. The Department of Transport and Main Roads has issued a standard drawing for hazard marker posts that indicate the location of hazard marker posts in relation to road edge guide posts at bridges at culvert sites that may be used. Refer to SD1851 *Hazard Marker – Post and Installation Details*.

4.2.7 Maintenance marker posts

New

Maintenance marker posts should be installed in accordance with Department of Transport and Main Roads SD1358 *Maintenance Marker Posts – Post and Installation Details* to indicate any item that requires regular maintenance, or which may otherwise be damaged by operation of maintenance machinery.

4.3 Treatment of substandard horizontal curves

4.3.5 Signs for substandard horizontal curves

Addition

(k): *Tilting Truck (W1-8 Series)*



W1-8-Q01

The Tilting Truck (W1-8-Q01) shall only be used when W1-8 series signs cannot be installed due to physical constraints.

Note: Right hand version is available, and the arrow may be adjusted to any of the arrows within the W1-8 series.

(l): *WATCH FOR TRUCKS (W8-Q12)*



W8-Q12

The WATCH FOR TRUCKS (W8-Q12) supplementary plate should only be used to supplement curve warning signs on narrow winding roads where there have been problems with large vehicles sweeping across the centre line.

4.3.6 Determination for the use of Curve Alignment Marker signs

4.3.6.2 Curve Alignment Marker signs

Addition

(b) *Curve Alignment Marker x km/h (D4-7) (L and R)*



D4-7-Q01

The Curve Alignment Marker x km/h (D4-7-Q01) sign may replace the first Curve Alignment Marker sign in a series of CAMs around a curve in accordance with the guidance for use of D4-7 where additional delineation is considered required.


4.5 Treatment of approaches to structures and obstructions

4.5.6 Signs for approaches to structures and obstructions

4.5.6.1 Regulatory signs

Addition

(d): RAMP LOAD LIMIT x t GROSS (R6-3-Q01)



R6-3-Q01

The RAMP LOAD LIMIT x t GROSS (R6-3-Q01) sign may be used in Queensland to indicate the maximum permissible gross load in tonnes of an on/off ramp.

(e): OVERALL WIDTH LIMIT x m (R6-33-Q01)



R6-33-Q01

The OVERALL WIDTH LIMIT x m (R6-33-Q01) sign may be used in Queensland to indicate the maximum permissible overall width in metres of a vehicle on a section of road and if used shall be erected on the immediate approaches to the restricted section.

Detour signs shall be erected before and at an appropriate intersection in advance of the section to divert over-width vehicles (see Clauses 4.5.2.4 and 4.5.6.2).

4.5.6.2 Detour signs

Addition

- (a): *LOAD LIMIT AHEAD x t GROSS, HEAVY VEHICLES DETOUR (G9-4-Q01) (L/R)*



G9-4-Q01

The LOAD LIMIT AHEAD x t GROSS, HEAVY VEHICLES DETOUR (G9-4-Q01) sign may be used in at Queensland in advance of an intersection with a detour.

4.5.6.3 Warning signs

Addition

- (h): *OVERHEAD WIRES (W5-Q16)*



W5-Q16

The OVERHEAD WIRES (W5-Q16) sign may be installed in advance of overhead wires above a roadway, waterway, or thoroughfare.

At locations where boat masts are at risk of touching overhead wires W8-Q16 supplementary plate should be installed beneath W5-Q16. Where a clearance height is required to be shown the W8-Q16 supplementary plate should be installed.

- (i): *BOATS LOWER MASTS (W8-Q16)*



W8-Q16

The BOATS LOWER MASTS (W8-Q16) sign should only be installed below W5-Q16.

(j): CLEARANCE x m (W8-Q17)



W8-Q17

The CLEARANCE x m (W8-Q17) sign should only be installed below W5-Q16.

4.6 Changes in pavement width

4.6.5 Signs for lane reductions (merges) and approaches to changes in pavement width

4.6.5.2 Signs for lane changes

Addition

Where a lane change requires the right lane to merge left, signs and pavement arrows in this clause shall be modified accordingly.

4.9 Water crossings

4.9.6 Signs for water crossings

Addition

(n): ON SIDE ROAD (G9-21-1-Q01)



G9-21-1-Q01

The ON SIDE ROAD (G9-21-1-Q01) supplementary plate shall be used with ROAD SUBJECT TO FLOODING INDICATORS SHOW DEPTH (G9-21-1 and G9-21-2) and ROAD SUBJECT TO FLOODING DO NOT ENTER WHEN FLOODED (G9-21-3) signs where a floodway on a side road is too close to the main road for G9-21-1, G9-21-2 or G9-21-3 to be installed on the side road.

4.10 Road block barriers

4.10.3 Associated device and marking

Addition

Boom Barrier (W5-Q11)



W5-Q11

Where a boom barrier is used across the roadway other than for active railway crossings (refer to Queensland MUTCD Part 7), the Boom Barrier (W5-Q11) warning sign shall be used in advance of the barrier at a distance in accordance with Appendix D.

4.11 Physical obstructions, road conditions and other hazards

4.11.3 Signs for warning of hazardous road conditions

Addition

(h): High Wind Area (W5-Q12), HIGH WIND AREA (W8-Q14)



W5-Q12



W8-Q14

The High Wind Area (W5-Q12) and HIGH WIND AREA (W8-Q14) signs may be used in exposed areas where there are potential vehicle stability issues arising from strong cross winds.

(i): *DRIFT SAND (W5-Q04)*



W5-Q04

The DRIFT SAND (W5-Q04) sign may be used where the occurrence of drift sand represents a hazard to drivers.

(i): *SOFT EDGES (W5-Q05)*



W5-Q05

The SOFT EDGES (W5-Q05) sign may be used where the presence of soft, unsealed road shoulders represents a hazard to drivers.

4.11.4 Signs for warning of unexpected vehicles

Addition

(c): *EMERGENCY VEHICLES (W5-36-Q01)*



W5-36-Q01

The EMERGENCY VEHICLES (W5-36-Q01) sign shall be used where two or more emergency services are co-located. The sign shall be provided in lieu of other signs such as FIRE STATION (W5-36) and AMBULANCE STATION (W5-37), as applicable.

(g): *Queued Traffic (W5-Q13)*



W5-Q13

The Queued Traffic (W5-Q13) sign may be used to give advance warning to drivers of queued traffic ahead where stopping sight distance to the end of queue may not be achieved.

Where the Queued Traffic sign is installed, active devices that operate during times when queues are anticipated should be considered.

(h): *Buses (W5-Q14)*



W5-Q14

The Buses (W5-Q14) sign may be used in advance of locations where entering buses may constitute an unexpected hazard, such as an intersection or driveway in proximity to a bus depot.

4.11.5 Signs for warning of wandering stock

Addition

The following signs may be used to provide warning of unfenced roads and wandering stock:



W5-Q10



W5-Q10



W8-Q13

The WANDERING STOCK (W5-Q10) signs may be used for the warning of wandering stock due to adjacent unfenced property. If used, a sign shall be placed at the beginning of the section of road concerned and repeated as necessary. A station/property name should be used where applicable.

The examples included above show both sheep and cattle. Where a single type of stock or horses are prevalent an alternate warning sign may be used.

The WANDERING STOCK (W8-Q13) supplementary plate shall only be used below the Stock (W5-38) warning sign.

4.11.6 Signs for warning of hazardous wildlife

4.11.6.1 Warning signs

New

Wildlife warning signs shall be installed when:

- wildlife frequently encroaches onto the road or roadside in localised areas when there is a significant traffic volume, or
- where drivers are unlikely to expect wildlife.

Wildlife warning signs may be repeated (if warranted) at intervals of not less than 5 km in rural areas, or as appropriate in urban areas. It may also be appropriate to sign short, individual lengths of road in specific locations where the risk of an animal / vehicle collision is greatest.

Wildlife warning and information signs are not specifically intended to perform an animal preservation role and research indicates that they are not particularly effective for this purpose. If the preservation of animals is critical other traffic management and animal management treatments will be required; signs alone are not adequate.

Wildlife warning signs should:

- not be provided for migratory animals,
- be continually assessed for their need and relevance, and
- be removed if no longer relevant.

4.11.6.2 Temporary warning signs

New

Temporary wildlife warning signs (W5-Q18 series) may be used where there have been recent sightings of wildlife, especially koalas and cassowaries, in a localised area.



Examples of temporary wildlife warning signs (W5-Q18)

4.11.6.3 High-impact warning signs

New

High impact wildlife warning signs consist of a white target board with a green border and incorporate an animal warning sign. Supplementary plates may be installed below where required.

High impact wildlife warnings signs should be used selectively at hotspot locations or in areas with significant conservation value. These signs may be used in conjunction with Wildlife Conservation Area (WCA) signs (see Clause 4.11.6.4) to highlight hotspots within the conservation area.

Figure 4.11.6.3 – Examples of wildlife warning signs with target boards



4.11.6.4 Wildlife Conservation Area (WCA) signing

New

Wildlife Conservation Area (WCA) signs (W5-Q19) should include the animal symbolic warning sign of the most prevalent animal in the area. WCA signs shall only be installed where the warrants for the included warning sign in accordance with Section 4.11.6 are met.



W5-Q19

WCA signs shall only be installed within the following locations where a ‘conservation’ status is related to wildlife and not for other reasons (such as scenic value or flora):

- protected areas under the *Nature Conservation Act 1992* where vehicle / animal collisions are deemed likely:
 - national parks
 - conservation parks
 - resources reserves
 - nature refuges
 - coordinated conservation areas
 - wilderness areas

- World Heritage management areas, and
- international agreement areas.
- land within state forests, timber reserves or dedicated as a reserve (or protected area) for environmental purposes under the *Land Act 1994*
- a World Heritage Area under the World Heritage Convention
- an area supporting a critically endangered or endangered ecological community in the list established under the *Commonwealth Environment Protection and Biodiversity Conservation Act 1999* (EPBC Act)
- a declared RAMSAR wetland under the EPBC Act
- an area of high nature conservation value under the *Vegetation Management Act 1999*, or
- an area, other than state-controlled land, identified in a local government's planning scheme as an area that has special environmental significance for native wildlife.

WCA signs should be erected as close as possible to the boundary of the conservation area but shall be placed so as not to compete with other traffic control devices or pose a safety hazard to road users.

WCAs may be marked with the wildlife threshold pavement marking in accordance with Clause 4.11.6.5. Green RRPMs should be used in conjunction with WCA signs (see Clause 4.11.6.6).

4.11.6.5 Wildlife threshold pavement marking

New

The wildlife threshold pavement marking is detailed in TC2321 and may be used to identify the start of signed WCAs. The wildlife threshold pavement marking should not be used at locations that do not meet the requirements of a WCA (see Clause 4.11.6.4). Wildlife threshold pavement marking should not be used on multi lane arterial roads.

The purpose of the wildlife threshold pavement marking is to complement the entry signs into a WCA and shall bear the words 'WILD LIFE', which shall be marked in accordance with Section 5.8.

Wildlife threshold pavement markings shall meet the skid resistance requirements of Transport and Main Roads' Technical Specification MRTS110 *Coloured Surface Treatments* and shall consist of a green background with a yellow border.

Green RRPMS shall be installed at all wildlife threshold pavement marking installations (see Clause 4.11.6.6).

4.11.6.6 RRPMS

New

Green RRPMS may be used at locations with WCA signs (see Clause 4.11.6.4) to highlight areas of greater wildlife significance, or where vehicle / animal collisions are significantly overrepresented. Green RRPMS shall not be installed with wildlife information signs.

Where green RRPMS are used for signing WCAs, they shall:

- a) be installed over the length the WCA
- b) be removed where no longer required
- c) be bi-directional and installed adjacent to the road edge line on both sides of the road
- d) be installed in addition to standard RRPM requirements as specified in Section 5.9
- e) not be installed on motorways
- f) not be installed on roads or in locations where they may pose a hazard to other road users, and
- g) have a minimum spacing of 48 m and not exceed a spacing of 96 m; spacing (m) shall be uniform over the length of the area defined by the WCA.

4.11.6.7 Vehicle activated devices

New

Vehicle activated devices incorporate a radar device that activates when a vehicle is travelling above a pre-set speed threshold and may be used as an alternative to passive signs. Either flashing lights (wig wags) or the whole sign may be vehicle activated.

These devices may be used where:

- there is an increased risk of animal / vehicle collisions, or
- due to elevated impacts with animals.

Vehicle activated flashing lights

Vehicle activated flashing lights shall be installed with a radar device capable of detecting vehicle speeds that activate the flashing of the lights in a wig wag arrangement. The devices shall be used with high impact wildlife warning signs (see Clause 4.11.6.3) to enhance sign conspicuity. The flashing lights shall operate alternately when activated by an approaching vehicle which is exceeding a nominated speed within the prescribed times of operation, or during set times when animals are likely to be encountered. The flashing lights shall continue to flash until the vehicle speed reduces to below the nominated speed or the vehicle continues past the sign.

Vehicle activated flashing light signs should be used selectively at critical locations where high impact wildlife warning signs need enhancement to improve driver speed compliance.

Vehicle activated signs

Vehicle activated signs may be used where the presence of animals along the road is expected and there is a poor compliance with the posted speed. These devices are installed with a radar device capable of detecting vehicle speeds and shall be pre-set with the posted speed limit. A relevant animal symbol that is easily understood by drivers shall be displayed on the sign. When a vehicle is detected, the sign shall activate as follows:

- Vehicle at or below the posted speed limit: device shall activate and cycle between a green symbolic of the animal and the message 'THANK YOU'. Cycle shall be between 1-2 seconds.
- Vehicle above the posted speed limit: device shall activate and cycle between a red symbolic of the animal and the message 'SLOW DOWN'. Cycle shall be between 1-2 seconds.

4.11.7 Signs for warning of temporary or part time hazards

Addition

(f): *CHANGED TRAFFIC CONDITIONS (T1-23-Q01)*



T1-23-Q01

The CHANGED TRAFFIC CONDITIONS (T1-23-Q01) sign may only be used on roads with both a maximum posted speed limit of 60 km/h and where the available verge width is less than 2 m.

4.11.8 Vehicle mounted signs

Addition

(c): *Other vehicle mounted signs*

NOTE In addition to the signs prescribed below, certain other requirements for special vehicles are prescribed in the *Transport Operations (Road Use Management) Act 1995*.

4.12 Miscellaneous signs

4.12.2 Miscellaneous regulatory signs

Addition

(h) *WEAVING TRAFFIC (W5-Q15)*




W5-Q15

The WEAVING TRAFFIC (W5-Q15) sign may be used where traffic has a short distance to cross between adjacent lanes to enter or exit a road.

- (i) *Lane Filtering Prohibited (R6-020-Q01), END Lane Filtering Prohibited (R6-020-Q02)*



R6-020-Q01



R6-020-Q02

The Lane Filtering Prohibited (R6-020-Q01) sign and END Lane Filtering Prohibited (R6-020-Q02) sign shall be installed where motorcycle riders are to be prohibited from lane filtering.

4.12.3 Heavy vehicle control and information signs

Difference

Replace Item (c) with:

The BUSES MUST ENTER (R6-18) and TRUCKS MUST ENTER (R6-27) signs shall not be used at the entrance to heavy vehicle checking stations (heavy vehicle interception sites).

For guidance on the signing and line marking for heavy vehicle interception sites, refer to the [Signing and Line Marking for Heavy Vehicle Interception Sites Guideline](#).

Addition

- (e): *TRUCKS AND BUSES USE LEFT LANE (R6-28-Q01)*



R6-28-Q01


The TRUCKS AND BUSES USE LEFT LANE (R6-28-Q01) shall be used to indicate a mandatory requirement for trucks and buses to use the left lane.

4.12.4 Emergency access location signs

Addition

(a): *Emergency Median Crossing (GE9-23-1), Emergency Median Crossing x m (GE9-23-2)*

At emergency access locations located in the median, a combination of Emergency Median Crossing (GE9-23-1), No U Turn (R2-5), and AUTHORISED VEHICLES EXCEPTED (R9-Q04_2) signs may be used where there is a history or high likelihood of unauthorised vehicles performing U-turns.

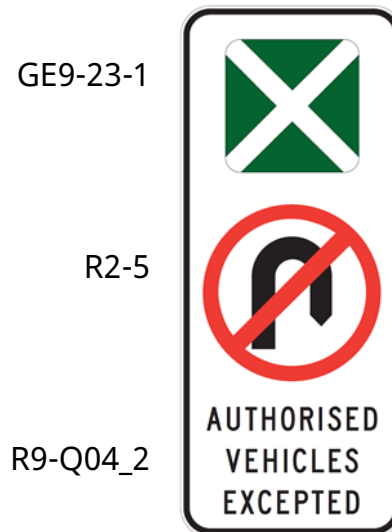

(b): *Emergency Access (GE9-24-1), Emergency Access Direction (GE9-24-2) (L and R)*

Where an advance sign may be required for an Emergency Access (GE9-24-1) or Emergency Access Direction (GE9-24-2) (L and R) sign, a Supplementary Distance Plate x m (G9-66) may be added below the GE9-24 series signs.

4.12.5 Signs for warning of cane vehicles

New

The following signs may be used to warn of cane vehicles:

- (a) *Cane Vehicle Crossing (W5-50-Q01), CANE VEHICLE CROSSING (W5-50-Q02)*



W5-50-Q01



W8-Q15

The Cane Vehicle Crossing (W5-50-Q01), CANE VEHICLE CROSSING (W8-Q15) signs may be used at locations where cane vehicles cross the roadway. Where cane vehicles are likely to cross multiple locations along a road, or travel along a road, see item (b).

- (b) *SUGAR CANE AREA WATCH FOR SLOW VEHICLES HAULING CANE (G9-Q03_1), SUGAR CANE AREA SLOW VEHICLES (G9-Q03_2)*



G9-Q03_1



G9-Q03_2

The SUGAR CANE AREA WATCH FOR SLOW VEHICLES HAULING CANE (G9-Q03_1), SUGAR CANE AREA SLOW VEHICLES (G9-Q03_2) signs may be used where cane vehicles are likely to cross multiple locations along a road, or travel along a road.

5 Pavement markings

5.3 *Longitudinal lines*

5.3.10 Audio-tactile line marking

5.3.10.1 General

Addition

For additional guidance on the use of audio-tactile line marking in Queensland refer to the RPDM Part 6.

5.4 *Wide centre line treatment*

5.4.2 Application

5.4.2.1 General

Addition

For additional guidance on the use of wide centre line treatment in Queensland refer to the RPDM Part 3.

5.4.2.2 Width

Difference

Replace:

Where the seal width is not sufficient to provide a separation width of 1 m, the width may be reduced to a minimum of 0.6 m. Widths narrower than 0.6 m may be permitted by jurisdictional guidance.

with:

Where the seal width is not sufficient to provide a separation width of 1 m, a redesign of the treatment is required in accordance with the RPDM Part 3.

5.4.2.3 Start and end transitions

Difference

Replace Note 2 of Figure 5.10:

L is the transition distance calculated from traffic speeds and rate of lateral movement in accordance with road design practice, where W is the lateral movement distance (i.e. shift from normal dividing line to one side of the wide centre line treatment line).

with:

Refer to RPDM Part 3 for WCLT transition distance requirements.

5.4.2.6 Transitions at narrow structures and overtaking lanes

Difference

Replace Note 2 of Figure 5.13:

A transition back to normal dividing line is shown. However, the WCLT may be continued through the structure if the residual width available, after maintaining the lane widths, is greater than 0.6 m, see Clause 5.4.2.2.

with:

The width of the WCLT over the narrow bridge structure is the residual width available while maintaining the lane and shoulder widths. These widths may vary at successive structures dependent on the residual width available.

5.4.2.7 Sign requirements

Addition

The following signs may be used in Queensland to inform motorists where overtaking is not permitted and where overtaking is permitted when safe to do so.



G9-Q14_1



G9-Q14_2



G9-Q14_3



G9-Q14_4

5.5 Transverse Lines

5.5.2 Give way lines

Difference

Replace Item (c) with:

At a roundabout, to indicate the safe position for a vehicle to be held before entering. The line shall be placed across the entering road. The line may be along the edge of the circulating roadway (see Figures 2.8 and 2.9) or set back up to 5 m from the edge of circulating roadway. The line may be staggered on multiple lane approaches.

5.8 Messages on pavements

5.8.5 KEEP CLEAR marking

Addition

Where an installation of KEEP CLEAR pavement marking applied in accordance with this clause has proven to be ineffective, the KEEP INTERSECTION CLEAR G9-67-Q01 sign may be installed to further discourage queuing across the intersection.



G9-67-Q01

5.9 Raised pavement markers

5.9.5 Application of raised pavement markers

5.9.5.2 General

Addition

Where RRPMS are used to augment lane lines, edge lines, and outline markings adjacent to bicycle lanes (or sealed shoulders forming part of an identified cycle network) which are less than 1.5 m wide, they shall not be placed within the bicycle lane (or sealed shoulder), but on the opposite side of the line which they are augmenting.


5.11 Pavement markings at entrance and exit ramps

5.11.7 Exit ramp marking

New

The making shown in Figure 5.11.7 is the normal exit ramp marking. To delineate the approach to and entrance of an off ramp, green uni-directional RRPMS are used in association with the edge line.

Figure 5.11.7 – Marking at an exit ramp

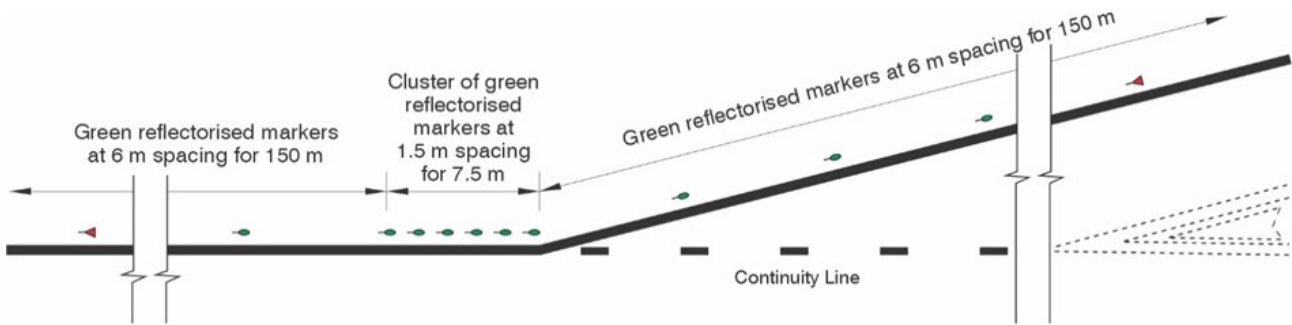

Appendices

Appendix H: Signs for wildlife awareness (normative)

Addition

Wildlife awareness signs shall indicate only one animal species that is likely to be present. If there are different types of animals encroaching on the roadside within an area and wildlife awareness signs are required for multiple animal species, only the animal most at risk from traffic strikes shall be installed.

The sizes of wildlife awareness signs shall be:

- Size A: 750 x 600 mm, where the speed limit is posted \leq 80 km/h.
- Size B: 900 x 720 mm, where the speed limit is posted $>$ 80 km/h.

The following conditions apply to wildlife awareness signs:

- Signs should not be provided for migratory animals.
- Signs should only be provided where the presence of animals on the road is expected.
- Signs shall be continually assessed for their need and relevance.
- Signs that are no longer applicable shall be removed.

Wildlife awareness signs should not be erected on the same post as wildlife warning signs (with the exception of W8-Q18). Wildlife warning signs take precedence over wildlife awareness signs. Signs should be located where the animals are likely to be encountered and not too far in advance.

The 1300 ANIMAL sign (W8-Q18) may be used to supplement wildlife awareness signs to provide motorists with a single point of contact to report injured animals. No other phone numbers shall be included on the sign. The RSPCA shall first be contacted prior to installation of a sign bearing the 1300 ANIMAL number to ensure adequate services operate in the area the sign is to be installed.

The following wildlife awareness signs may be used in Queensland:



Examples of W5-Q20



W8-Q18



W8-Q19



W5-Q21



W5-Q22

