

Queensland Manual of Uniform Traffic Control Devices

Part 3: Traffic control for works on roads

November 2025

Copyright

© The State of Queensland (Department of Transport and Main Roads) 2025.

Licence



This work is licensed by the State of Queensland (Department of Transport and Main Roads) under a Creative Commons Attribution (CC BY) 4.0 International licence.

CC BY licence summary statement

In essence, you are free to copy, communicate and adapt this work, as long as you attribute the work to the State of Queensland (Department of Transport and Main Roads). To view a copy of this licence, visit: <https://creativecommons.org/licenses/by/4.0/>

Translating and interpreting assistance



The Queensland Government is committed to providing accessible services to Queenslanders from all cultural and linguistic backgrounds. If you have difficulty understanding this publication and need a translator, please call the Translating and Interpreting Service (TIS National) on 13 14 50 and ask them to telephone the Queensland Department of Transport and Main Roads on 13 74 68.

Disclaimer

While every care has been taken in preparing this publication, the State of Queensland accepts no responsibility for decisions or actions taken as a result of any data, information, statement or advice, expressed or implied, contained within. To the best of our knowledge, the content was correct at the time of publishing.

Feedback

Please send your feedback regarding this document to: tmr.techdocs@tmr.qld.gov.au

About this document

This document, together with the *Queensland Guide to Temporary Traffic Management* (QGTTM), is to provide organisations and individuals carrying out works on roads with a set of uniform practices for the signing, delineation, and use of devices for works on roads which will promote the safety of workers and the safe and efficient movement of road users at the roadworks site.

How to use this document

This document is designed to be read and applied together with AS 1742.3-2019 *Manual of Uniform Traffic Control Devices Part 3* (AS 1742.3-2019). You must have access to the Australian Standard to understand what applies in Queensland.

This document:


- sets out how AS 1742.3-2019 applies in Queensland
- has precedence over AS 1742.3-2019 when applied in Queensland
- has the same section and clause numbering and headings as AS 1742.3-2019.

The following table summarises the relationship between AS 1742.3-2019 and this document:

Applicability	Meaning
Accepted	The Australian Standard section or clause is accepted.
Accepted, with amendments	Part or all of the section or clause has been accepted with additions, deletions or differences.
New	There is no equivalent section or clause in the Australian Standard.
Not accepted	The Australian Standard section or clause is not accepted.

This document is designed to be read and applied together with the Queensland MUTCD Part 3 and the QGTTM. You must have access to these documents to understand what applies in Queensland.

A summary of the documents relevant to traffic management practice in Queensland and their interrelationships follows.

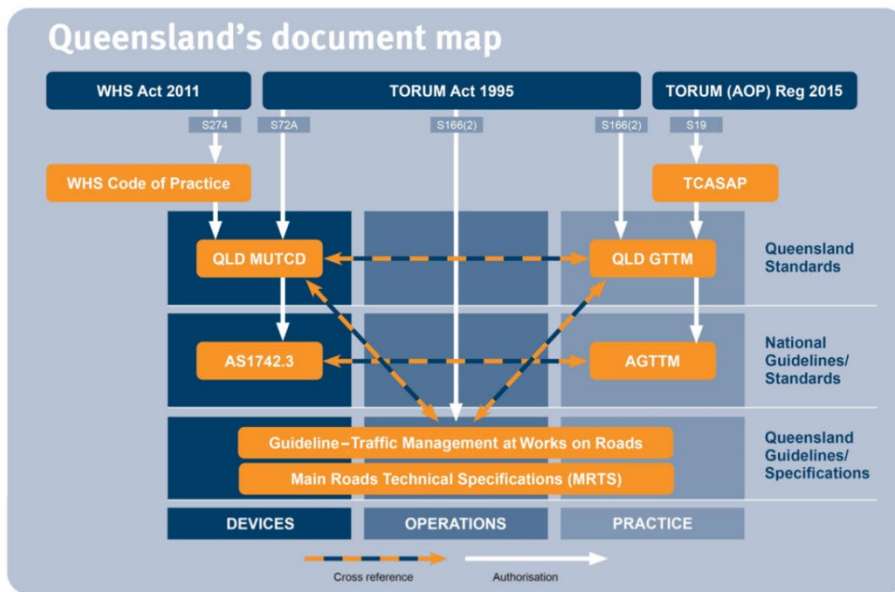

Definitions

The following general amended definitions apply when reading AS 1742.3-2019.

Reference to...	Means
AGTTM	Austroads Guide to Temporary Traffic Management .
AGTTM: 2019	A reference to any part of the <i>Austroads Guide to Temporary Traffic Management (AGTTM) 2019</i> means you must refer to the corresponding Part of the <i>Queensland Guide to Temporary Traffic Management (QGTTM)</i> .
AS 1742	Australian Standard AS 1742 <i>Manual of Uniform Traffic Control Devices</i> , the complete suite of national guidance published by Standards Australia . Queensland guidance may vary from national guidance due to local conditions.
AS 1742.3-2019	AS 1742.3-2019, as amended by this document; for example, a reference to AS 1742.3-2019 means you must refer to the Australian Standard Part 3, and Part 3 of the <i>Queensland Manual of Uniform Traffic Control Devices (Queensland MUTCD)</i> . Throughout AS 1742.3-2019, references are made to other parts of the Australian Standards (for example, when reading Part 3, you may be referred to Part 1 for further information.) In this case, you must refer to the equivalent Part within the Queensland MUTCD first. Check the applicability of the equivalent Part in the Queensland MUTCD before referring to the referenced Australian Standard Part.

Reference to...	Means
QGRS	Queensland Guide to Road Safety which provides Queensland exceptions to Austroads <i>Guide to Road Safety</i> .
QGTM	Queensland Guide to Traffic Management which provides Queensland exceptions to Austroads <i>Guide to Traffic Management</i> .
QGTMM	Queensland Guide to Temporary Traffic Management which provides Queensland exceptions to Austroads <i>Guide to Temporary Traffic Management</i> .
Queensland (Q) series / Traffic Control (TC) signs	A collection of non-standard traffic control signs officially approved under the <i>Transport Operations (Road Use Management) Act 1995</i> (TORUM Act) and available on the department's MUTCD Q-series and TC signs webpage .
TORUM	Transport Operations (Road Use Management) Act 1995 .
TRUM	Traffic and Road Use Management (TRUM) manual , published by Transport and Main Roads, which includes information supplementing Austroads <i>Guide to Traffic Management</i> (Volume 1).

Relationship table

Section	Clause	Description	Applicability
1	Scope and general		
	1.1	Scope	Accepted
	1.2	Normative references	Accepted
	1.3	Terms and definitions	
	1.3.1	<i>built-up area</i>	Accepted
	1.3.2	<i>competent person</i>	Accepted with amendments
	1.3.3	<i>frequently changing work area</i>	Accepted
	1.3.4	<i>long-term</i>	Accepted
	1.3.5	<i>may</i>	Accepted with amendments
	1.3.6	<i>multilane</i>	Accepted
	1.3.7	<i>open road area</i>	Accepted
	1.3.8	<i>road safety barrier system</i>	Accepted
	1.3.9	<i>road user</i>	Accepted
1.3.10	<i>road worker</i>	Accepted	
1.3.11	<i>roadway</i>	Accepted	

Section	Clause	Description	Applicability
	1.3.12	<i>running lane</i>	Accepted
	1.3.13	<i>shall</i>	Accepted with amendments
	1.3.14	<i>should</i>	Accepted with amendments
	1.3.15	<i>short-term</i>	Accepted
	1.3.16	<i>speed of traffic</i> <i>traffic speed</i>	Accepted
	1.3.17	<i>traffic</i>	Accepted
	1.3.18	<i>traffic control device</i>	Accepted
	1.3.19	<i>traffic controller</i>	Accepted with amendments
	1.3.20	<i>two-way roadway</i>	Accepted
	1.3.21	<i>travelled path</i>	Accepted
	1.3.22	<i>work area</i>	Accepted
	1.3.23	<i>work site</i>	Accepted
	1.3.24	<i>Engineer</i>	New
	1.3.25	<i>Recommended</i>	New
	1.3.26	<i>Side Road (ON SIDE ROAD message)</i>	New
	1.4	Responsibility for safety at work sites	Accepted
	1.5	Innovation	New
	1.5.1	<i>Level of service</i>	New
	1.5.2	<i>Innovative devices, treatments, or practices</i>	New
	1.6	Legal authority	New
1.7	Prescribed training	New	
1.8	Operational and technical guidelines	New	
1.9	Variation to treatments and Registered Professional Engineer of Queensland certification	New	
1.10	Non-standard signs	New	
2	Traffic management plans		
	2.1	General	Accepted
	2.2	Preparation of traffic management plans	Accepted

Section	Clause	Description	Applicability
3	Traffic guidance scheme		
	3.1	General	Accepted
	3.2	Preparation of traffic guidance schemes	Accepted
	3.3	Implementation of traffic guidance schemes	Accepted
	3.4	Creating a temporary speed zone	
	3.4.1	<i>General</i>	Accepted
	3.4.2	<i>Requirements and recommendations</i>	Accepted
	3.4.3	<i>Duration</i>	Accepted
	3.4.4	<i>Advance warning of temporary speed zones (buffer zones)</i>	Accepted with amendments
	3.4.5	<i>Temporary speed zone</i>	Accepted
3.4.6	<i>Temporary offset speed zones</i>	Accepted	
4	Function, description and use of standard signs and devices		
	4.1	Functions of devices	Accepted
	4.2	Selection and use	
	4.2.1	<i>General</i>	Accepted
	4.2.2	<i>Multi-message signs</i>	Accepted with amendments
	4.2.3	<i>Delineation</i>	Accepted
	4.2.4	<i>Night conditions</i>	Accepted
	4.2.5	<i>Adjustment to existing devices</i>	Accepted
	4.2.6	<i>Covering of signs and devices</i>	Accepted
	4.2.7	<i>Safety barriers</i>	Accepted
	4.2.8	<i>Vehicle size and load restrictions</i>	Accepted
	4.3	Installation and removal	
	4.3.1	<i>Condition of devices</i>	Accepted
	4.3.2	<i>Positioning of devices</i>	Accepted
	4.3.3	<i>Setting out of devices</i>	Accepted
	4.3.4	<i>Orientation of sign</i>	Accepted
	4.3.5	<i>Inspection</i>	Accepted
	4.3.6	<i>Public awareness</i>	Accepted
4.3.7	<i>Removal</i>	Accepted	

Section	Clause	Description	Applicability
	4.4	Format and size of signs	
	4.4.1	<i>Format of signs</i>	Accepted
	4.4.2	<i>Retroreflective material</i>	Accepted
	4.4.3	<i>Sign sizes in the T series (excludes multi-message signs)</i>	Accepted
	4.4.4	<i>Sign panel sizes in the TM series (for use in multi-message sign frames)</i>	Accepted
	4.5	Sign mountings	
	4.5.1	<i>General</i>	Accepted
	4.5.2	<i>Multi-message sign frame</i>	Accepted
	4.6	Signs and devices for work site approaches and departures	
	4.6.1	<i>General</i>	Accepted
	4.6.2	<i>ROADWORK AHEAD (T1-1, TM1-1, T1-31), ROADWORK X km AHEAD (T1-16)</i>	Accepted with amendments
	4.6.3	<i>BRIDGEWORK AHEAD (T1-2, TM1-2), BRIDGEWORK X km AHEAD (T1-29)</i>	Accepted
	4.6.4	<i>ROAD PLANT AHEAD (T1-3-1, TM1-3-1, T1-3-2, TM1-3-2), GRADER AHEAD (T1-4, TM1-4)</i>	Accepted
	4.6.5	<i>Workers (symbolic), T1-5, TM1-5)</i>	Accepted
	4.6.6	<i>ROADWORK NEXT X km (T1-24)</i>	Accepted
	4.6.7	<i>ROADWORK ON SIDE ROAD (T1-25, TM1-25), ROAD PLANT ON SIDE ROAD (T1-27, TM1-27)</i>	Accepted with amendments
	4.6.8	<i>Next X km (T1-28, TM1-28)</i>	Accepted
	4.6.9	<i>SIDE ROAD CLOSED (T1-32, TM1-32)</i>	Accepted with amendments
	4.6.10	<i>END ROADWORK (T2-16, T2-17, TM2-17)</i>	Accepted with amendments
	4.6.11	<i>ROADWORK AHEAD, ROADWORK ON SIDE ROAD, and END ROADWORK signs</i>	New
	4.7	Signs and devices for regulatory control of traffic	
	4.7.1	<i>General</i>	Accepted
	4.7.2	<i>Manual control</i>	Accepted with amendments

Section	Clause	Description	Applicability
	4.7.3	<i>Sign control, single lane operation</i>	Accepted with amendments
	4.7.4	<i>Traffic signal control</i>	Accepted
	4.7.5	<i>Boom Barrier</i>	Accepted
	4.7.6	<i>Temporary speed limits</i>	Accepted with amendments
	4.8	Detour signs	
	4.8.1	<i>DETOUR AHEAD (T1-6, TM1-6)</i>	Accepted
	4.8.2	<i>END DETOUR (T2-23, TM2-23)</i>	Accepted
	4.8.3	<i>DETOUR (T5-1, TM5-1)</i>	Accepted with amendments
	4.8.4	<i>Detour markers (T5-6, TM5-6A)</i>	Accepted with amendments
	4.8.5	<i>LOW BRIDGE AHEAD ...m, HIGH VEHICLES DETOUR (G9-3), LOAD LIMIT ON BRIDGE ...t, HEAVY VEHICLES DETOUR (G9-4)</i>	Accepted
	4.8.6	<i>DETOUR FOR ... VEHICLES (G9-5)</i>	Accepted
	4.8.7	<i>Two-way Traffic (W4-11, T2-24, TM2-24)</i>	Accepted
	4.8.8	<i>All Traffic Turn (R2-14, RM2-14)</i>	Accepted
	4.8.9	<i>No Left Turn (R2-6(L), RM2-6(L), No Right Turn (R-6(R), RM6-6(R)), NO ENTRY (R2-4, RM2-4)</i>	Accepted
	4.8.10	<i>LOCAL TRAFFIC ONLY (G9-40-2, GM9-40-2)</i>	Accepted
	4.9	Road condition signs	
	4.9.1	<i>Slippery, (T3-3, TM3-3), SOFT EDGES (T3-6, TM3-6), ROUGH SURFACE (T3-7, TM3-7), Loose Stones (T3-9, TM3-9), GRAVEL ROAD (T3-13, TM3-13), LOOSE SURFACE (T3-14, TM3-14)</i>	Accepted with amendments
	4.9.2	<i>Advisory Speed signs (T3-16, TM6-16)</i>	Accepted
	4.9.3	<i>NEW WORK, NO LINES MARKED (T3-11, TM3-11), NO LINES DO NOT OVERTAKE UNLESS SAFE (T3-12, TM3-12) NO LINES DO NOT OVERTAKE (G9-89, GM9-89)</i>	Accepted
	4.10	Signs and devices for road and lane closures	
	4.10.1	<i>Signs</i>	Accepted with amendments

Section	Clause	Description	Applicability
	4.10.2	<i>Barricades</i>	Accepted
	4.11	Devices for delineating and indicating the travelled path	Accepted
	4.11.1	<i>Traffic cones and temporary bollards</i>	Accepted with amendments
	4.11.2	<i>Roadworks temporary guideposts</i>	Accepted
	4.11.3	<i>Temporary Hazard markers (T5-4, T5-5, T5-7)</i>	Accepted with amendments
	4.11.4	<i>Pavement markings</i>	Accepted
	4.11.5	<i>Raised retroreflective pavement markers</i>	Accepted
	4.11.6	<i>Temporary kerbing</i>	Accepted with amendments
	4.12	Containment fences and road safety barrier systems	
	4.12.1	<i>Containment fences</i>	Accepted
	4.12.2	<i>Longitudinal channelizing devices</i>	Accepted
	4.12.3	<i>Road safety barrier systems</i>	Accepted with amendments
	4.12.4	<i>Temporary crash attenuators</i>	Accepted
	4.13	Lamps	Accepted
	4.14	Vehicle-mounted signs and devices	
	4.14.1	<i>Vehicle-mounted warning device</i>	Accepted with amendments
	4.14.2	<i>Illuminated flashing arrow sign</i>	Accepted
	4.14.3	<i>Supplementary vehicle-mounted signs</i>	Accepted
	4.14.4	<i>Variable message signs</i>	Accepted
	4.14.5	<i>Truck-mounted and trailer-mounted crash attenuator</i>	Accepted
	4.15	Roadwork pilot vehicle	Accepted
	4.16	BLASTING WORK signs	Accepted
	4.17	Signs and devices for managing pedestrians	Accepted with amendments
	4.18	Signs and devices for managing cyclists	Accepted
	4.19	Signs and devices for vehicle height and mass restrictions	Accepted

Section	Clause	Description	Applicability
	4.20	Other signs and devices	
	4.20.1	<i>General</i>	Accepted with amendments
	4.20.2	<i>Antiglare screen</i>	Accepted
	4.20.3	<i>Work site screens (anti-gawking or anti-debris screen)</i>	Accepted
	4.21	High-visibility clothing for work personnel	Accepted
	4.22	Variable message signs used at roadworks	
	4.22.1	<i>General</i>	Accepted
	4.22.2	<i>Application</i>	Accepted
	4.22.3	<i>Message screens</i>	Accepted with amendments
	4.23	Use of supplementary devices at roadworks to reduce speed	New
	4.24	Display of electronic signs	New
	4.25	Changeable message signs	New
Appendices			
A	(normative) Additional multi-message signs		
	A.1	Scope	Accepted
	A.2	Development of further multi-message signs	Accepted
	A.3	List of additional multi-message sign panels	Accepted with amendments
B	(informative) Multi-message sign combinations		Accepted with amendments
C	(normative) Supplementary list of temporary roadworks signs		New
Bibliography			Accepted

Contents

About this document	i
How to use this document	i
Definitions	ii
Relationship table	iii
1 Scope and general	1
1.3 Terms and definitions.....	1
1.3.2 <i>Competent person</i>	1
1.3.5 <i>May</i>	1
1.3.13 <i>Shall</i>	1
1.3.14 <i>Should</i>	1
1.3.19 <i>Traffic Controller</i>	2
1.3.24 <i>Registered Professional Engineer of Queensland (RPEQ)</i>	2
1.3.25 <i>Recommended / Recommendation</i>	2
1.3.26 <i>Side road (use of ON SIDE ROAD message)</i>	2
1.5 Innovation.....	3
1.5.1 <i>Level of service</i>	3
1.5.2 <i>Innovative devices, treatments, or practices</i>	3
1.6 Legal authority	4
1.7 Prescribed training	4
1.8 Operational and technical guidelines.....	5
1.9 Variation to treatments and Registered Professional Engineer of Queensland certification.....	6
1.10 Non-standard signs	7
3 Traffic guidance scheme	8
3.4 Creating a temporary speed zone.....	8
3.4.4 <i>Advance warning of temporary speed zones (buffer zones)</i>	8
4 Function, description and use of standard signs and devices	8
4.2 Selection and use	8
4.2.2 <i>Multi-message signs</i>	8
4.6 Signs and devices for work site approaches and departures.....	11
4.6.2 <i>ROADWORK AHEAD (T1-1, TM1-1, T1-31, T1-Q06), ROADWORK X km AHEAD (T1-16)</i>	11
4.6.7 <i>ROADWORK ON SIDE ROAD (T1-25, TM1-25), ROAD PLANT ON SIDE ROAD (T1-27, TM1-27)</i>	12
4.6.9 <i>SIDE ROAD CLOSED (T1-32, TM1-32)</i>	14
4.6.10 <i>END ROADWORK (T2-16, T2-17, TM2-17)</i>	15
4.6.11 <i>ROADWORK AHEAD, ROADWORK ON SIDE ROAD, and END ROADWORK signs</i>	15

4.7	Signs and devices for regulatory control of traffic.....	20
4.7.2	<i>Manual control</i>	20
4.7.3	<i>Sign control, single lane operation</i>	21
4.7.6	<i>Temporary speed limits</i>	22
4.8	Detour signs	23
4.8.3	<i>DETOUR (T5-1, TM5-1)</i>	23
4.8.4	<i>Detour marker (T5-6, TM5-6A)</i>	24
4.9	Road condition signs	24
4.9.1	<i>Slippery (T3-3, TM3-3), SOFT EDGES (T3-6, TM3-6), ROUGH SURFACE (T3-7, TM3-7), Loose Stones (T3-9, TM3-9), GRAVEL ROAD (T3-13, TM3-13), LOOSE SURFACE (T3-14, TM3-14)</i>	24
4.10	Signs and devices for road and lane closures	25
4.10.1	<i>Signs</i>	25
4.11	Devices for delineating and indicating the travelled path	26
4.11.1	<i>Traffic cones and temporary bollards</i>	26
4.11.3	<i>Temporary hazard markers (T5-4, T5-5, T5-7)</i>	26
4.11.6	<i>Temporary kerbing</i>	27
4.12	Containment fences and road safety barrier systems.....	27
4.12.3	<i>Road safety barrier systems</i>	27
4.14	Vehicle mounted signs and devices.....	27
4.14.1	<i>Vehicle mounted warning device</i>	27
4.17	Signs and devices for managing pedestrians.....	29
4.20	Other signs and devices	30
4.20.1	<i>General</i>	30
4.22	Variable message signs used at roadworks.....	31
4.22.3	<i>Message screens</i>	31
4.23	Use of supplementary devices at roadworks to reduce speed.....	31
4.24	Display of electronic signs	32
4.25	Changeable message signs	34
	Appendix A – Additional multi-message signs (normative)	35
A.3	List of additional multi-message sign panels	35
	Appendix B – Multi-message sign combinations (informative)	66
	Appendix C – Supplementary list of temporary roadworks signs (normative)	68
C.1	Supplementary list of temporary roadworks signs approved for use in Queensland.	68

Tables

Table 4.14.1	– Vehicle mounted warning devices.....	28
Table A.1	– List of additional multi-message sign panels	35

Table A.2 – List of additional multi-message sign panels for use in Queensland	40
Table C.1 — List of temporary roadworks signs approved for use in Queensland.....	69

Figures

Figure 4.2.2(a) – Example multi-message signs with No Left / No Right Turn prohibition panels.....	10
Figure 4.2.2(b) – Examples of multi-message signs in accordance with the Transport Infrastructure Act 1994.	11
Figure 4.2.2(c) – Examples of multi-message signs for police.....	11
Figure 4.2.2(d) – Examples of multi-message signs for road closures	11
Figure 4.2.2(e) – Example of TM5-1B with two blanks	11
Figure 4.6.7 – Using the ON SIDE ROAD message	14
Figure 4.6.11(a) – Roadworks on a side road with no impact on the through road	17
Figure 4.6.11(b) – Roadworks on a side road which has an impact on the through road....	18
Figure 4.6.11(c) – Roadworks on a ‘No Through Road’ or ‘Cul-de-sac’	18
Figure 4.6.11(d) – Roadworks on a through road with no impact on the side road	19
Figure 4.6.11(e) – Roadworks on a through road which has an impact on the side road....	19
Figure 4.7.2 – LED-enhanced STOP / SLOW bat.....	20
Figure 4.24 – Examples of electronic signs	32
Figure 4.25 – Example changeable message sign.....	34
Figure B1 – Multi-message sign combination examples with traffic travelling to the right side of the signs	66
Figure B2 – Additional multi-message sign combination examples with traffic travelling to the right side of the signs	67

1 Scope and general

1.3 Terms and definitions

1.3.2 Competent person

Addition

Add the following notes to the definition:

2. Competent persons must be authorised by Transport and Main Roads to perform that task in Queensland.
3. A competent person may only undertake TTM activities in accordance with *Queensland Guide to Temporary Traffic Management (QGTTM) Part 8 Appendix A*.
4. Prescribed training for TTM activities is provided in Clause 1.7.

1.3.5 May

Addition

Add the following note to the definition:

Where the word 'may' is used, it indicates that use of the device is conditional, or optional. Usually, no specific requirement for design or application is intended.

1.3.13 Shall

Addition

Add the following note to the definition:

Where certain requirements in the design or application of the device are described with the 'shall' stipulation, it is mandatory that, when an installation is made, these requirements be met.

See Clause 1.9 b) for guidance on variations to 'shall' requirements.

1.3.14 Should

Addition

Add the following note to the definition:

Where the word 'should' is used, it is considered to be recommended use, but not mandatory.

See Clause 1.9 a) for guidance on variations to 'should' recommendations.

1.3.19 Traffic Controller

Addition

A person who holds an appointment as an accredited person under Section 21 of the *Transport Operations (Road Use Management) (TORUM) Act 1995* to perform the functions of a Traffic Controller as prescribed by Subdivision 6 of the *Transport Operations (Road Use Management – Accreditation and Other Provisions) Regulation 2015*.

1.3.24 Registered Professional Engineer of Queensland (RPEQ)

New

A person who is registered as a Registered Professional Engineer of Queensland (RPEQ), under the *Professional Engineers Act 2002* (Queensland) with the Board of Professional Engineers of Queensland, to provide a professional engineering service.

Note:

A professional engineering service is an engineering service that requires or is based on the application of engineering principles and data to a design or to a construction, production, operation, or maintenance activity relating to engineering and does not include an engineering service that is provided only in accordance with a prescriptive standard.

1.3.25 Recommended / Recommendation

New

A recommendation is the same as a 'should', see Clause 1.3.14.

1.3.26 Side road (use of ON SIDE ROAD message)

New

A side road is any other road which intersects and departs from the road you are travelling on.

For the use of the ON SIDE ROAD message refer to Clause 4.6.7.

1.5 Innovation

New

Innovative treatments that provide improved safety, efficiency and/or value engineering outcomes are encouraged. Such treatments may include:

- a) planning for greater network impacts through reducing the level of service for the road user typically enables works to be undertaken in a more time- and cost-efficient manner
- b) innovative deployment of devices, and/or
- c) alternative device layouts using new and/or improved devices.

New or improved devices, treatments or practices require approval by the Department of Transport and Main Roads (see Clause 1.9 for guidance about variation to optimal treatments).

Devices which are recommended by the Austroads Innovative Temporary Traffic Management Device and Solution Assessment (AITDSA) Scheme also require the approval by the department prior to being used on roads in Queensland. The AITDSA recommendation would be considered and form part of the department's approval process.

1.5.1 Level of service

New

For proposals that involve planning for greater network impacts through reducing the level of service for the road user, contact the relevant road owner(s) with all details and supporting information regarding the proposal. The approval of the relevant road owner(s) is required prior to implementation.

1.5.2 Innovative devices, treatments, or practices

New

For trials of new or innovative static or non-electrical traffic control devices, treatments or practices, a submission in accordance with the requirements of the Queensland *Manual of Uniform Traffic Control Devices* (MUTCD) Part 1 Clause 1.13 shall be submitted to TrafficEngineering.Support@tmr.qld.gov.au.

In addition, for new or innovative ITS or electrical products or systems, treatments or practices the *Applicant's Guide Products evaluation process for ITS, Electrical and Traffic Engineering specified and innovative products* outlines the Department of Transport and Main Roads product evaluation process for ITS, Electrical and Traffic Engineering specified and innovative field products. It is Transport and Main Roads' primary reference for manufacturers and/or suppliers (Applicants) seeking approval or acceptance of specified or innovative products for road transport infrastructure. Refer to the web page [Intelligent transport systems and electrical](#) (Department of Transport and Main Roads) for further details.

1.6 Legal authority

New

TORUM provides that 'Official Traffic Signs' shall be installed only by the authority of the Chief Executive of Transport and Main Roads or a local government. The Act also provides that any such sign shall be installed in accordance with the methods, standards and procedures prescribed in this *Manual*, or other duly approved documents.

This Part of the *Manual* provides the methods and standards for official traffic signs used for works on roads. The procedures for the installation of the signs are given in the QGTTM, which is issued as an approved notice under Section 166(2) of TORUM.

1.7 Prescribed training

New

A person is only authorised to perform the role in Queensland if the person holds an authority card that is applicable to that role (that is, where such an authority is a mandatory regulatory requirement). To obtain an authority card in Queensland, a person must undertake the relevant prescribed training course and meet any additional requirements relevant to the appropriate authority card. Prescribed training courses shall be those developed by the Department of Transport and Main Roads and delivered by approved registered training organisations.

Prescribed training courses are outlined as follows:

- a) [Working in proximity to traffic awareness Part 1](#): Required for persons who work on or adjacent to a road in accordance with the QGTTM Part 8 Table A7
- b) [Working in proximity to traffic awareness Part 2](#): Required for persons who have completed *Working in proximity to traffic awareness Part 1*, and are required to select and implement work method practices as per the short-term, low-impact works provisions (with exceptions) in accordance with the QGTTM Part 8 Table A7

- c) [Traffic management implementation](#) (TMI): Required for persons implementing Traffic Management Plans (TMPs) and Traffic Guidance Schemes (TGSs) in accordance with the QGTTM Part 8 Table A5
- d) [Traffic management design](#) (TMD): Required for persons that design, develop, review and inspect TMPs and TGSs in accordance with the QGTTM Part 8 Table A3
- e) [Traffic Controller](#): Required for person who holds an appointment to perform the functions of a Traffic Controller (see Clause 1.3.19) in accordance with the QGTTM Part 8 Table A4, and
- f) [Event Traffic Marshal](#): Required for volunteers undertaking event traffic management in accordance with the QGTTM Part 8 Table A7.

In addition to the prescribed training courses identified above, temporary traffic management (TTM) workers listed below shall also act in accordance with the relevant QGTTM requirements:

- g) *lookout person*: For persons who have completed *Working in proximity to traffic awareness Part 1* and *Part 2* and are required to act in accordance with the QGTTM Part 8 Table A7
- h) *roadworks pilot vehicle driver*: For persons who act in accordance with the QGTTM Part 8 Table A7
- i) *truck-mounted attenuator (TMA) vehicle driver*: For persons who have completed TMI and are required to act in accordance with the QGTTM Part 8 Table A7, and
- j) *authorised person*: For persons who act in accordance with the QGTTM Part 8 Table A7.

1.8 Operational and technical guidelines

New

The Department of Transport and Main Roads has published additional operational and technical guidelines, including the [Guideline –Traffic Management at Works on Roads](#), that provide detailed information of traffic control devices that may be used for activities regarding works on roads. These documents are issued as approved notices under Section 166(2) of TORUM.

1.9 Variation to treatments and Registered Professional Engineer of Queensland certification

New

This Part of the *Manual* contains mandatory requirements (*shall*), recommendations (*should*) and options (*may*). The application of these mandatory requirements and recommendations is intended to provide the optimal level of safety and traffic efficiency. Variations to these treatments may be undertaken as follows:

- a) Where recommendations (*should*) are not adopted in preparing a TMP or TGS, the reasons must be based on sound temporary traffic management judgement and reasoning, and shall be documented through a risk assessment process to demonstrate the acceptability and safety of the varied approach. The risk assessment, in accordance with the QGTTM shall be undertaken and signed by a TMD or an RPEQ.
- b) Where mandatory requirements (*shall*) are not adopted in preparing a TMP or TGS, the reasons must be based on sound temporary traffic management or traffic engineering judgement and reasoning, and shall be documented through a risk assessment process to demonstrate the acceptability and safety of the varied approach. The risk assessment, in accordance with the QGTTM, shall be undertaken and signed by a TMD or an RPEQ.

In addition, both the risk assessment and the TMP and/or TGS shall be certified by a Registered Professional Engineer of Queensland (RPEQ).

The RPEQ is only required to certify that portion of the TMP and/or TGS design impacted by or related to departures from the mandatory requirement.

Where mandatory requirements (*shall*) are not adopted, the TMD preparing the TMP or TGS shall email notifications of variations to mandatory requirements (including all relevant information and RPEQ details) to TrafficEngineering.Support@tmr.qld.gov.au for information purposes and for the benefit of identifying potential future practice changes – not for approval or endorsement. These variations may include learnings that may be attributed to the variation of a *shall* requirement, such as operational, cost or safety impacts.

- c) Where innovative treatments (see Clause 1.5) that are outside the scope of the Queensland MUTCD are proposed to be adopted in a TMP or TGS, a risk assessment, in accordance with the QGTTM, shall be undertaken by a Competent Person. Both the risk assessment and the TMP and/or TGS shall be certified by an RPEQ. The RPEQ is only required to certify that portion of the TMP and/or TGS design impacted by or related to the use of the innovative treatment which is outside the scope of the Queensland MUTCD

All proposed innovative treatments require approval by Transport and Main Roads prior to their use or adoption. Requests for approval of innovative treatments (including all relevant information) shall be emailed to TrafficEngineering.Support@tmr.qld.gov.au. As part of an approval to use or trial an innovative treatment, Transport and Main Roads may require that the applicant provides a detailed evaluation report on the performance and effectiveness of the treatment. Transport and Main Roads may use the results of the evaluation to identify potential future practice changes to this Part of the *Manual*.

- d) The use of options (*may*), when adopted in preparing a TMP or TGS, are not a variation to the optimal treatment and do not require certification by an RPEQ.

Very few roadworks sites should fall within scope of the RPEQ requirement in relation to subclauses (b) and (c). Examples include TMPs or TGSs which involve complex geometric changes that require the application of engineering design principles or complex diversions that might require detailed analysis (such as micro-simulation traffic modelling) to establish the network impacts.

Risk assessments for TTM activities shall be prepared in accordance with the requirements in QGTTM Part 10 Section 2 *Risk Management for TTM*.

1.10 Non-standard signs

New

Those responsible for the design and erection of signs are not encouraged to develop signs for their own particular use; however, there may be instances where no suitable standard sign exists.

In these cases, refer to the guidance requirements in the Queensland MUTCD Part 1, Clause 1.8 for requesting special non-standard signs.

3 Traffic guidance scheme

3.4 Creating a temporary speed zone

3.4.4 Advance warning of temporary speed zones (buffer zones)

Difference

Replace:

A speed limit reduction of 60 km/h or more should be effected in two steps. The steps may comprise either two successive speed zone steps in accordance with Item (b), or a speed zone step and a step using the Speed Limit AHEAD sign in accordance with Item (a).

with:

Speed limits shall be reduced in accordance with the requirements detailed in the [Queensland Guide to Temporary Traffic Management](#) (QGTTM) Part 3 Section 5.5.1.

4 Function, description and use of standard signs and devices

4.2 Selection and use

4.2.2 Multi-message signs

Difference

Replace the entire Clause 4.2.2 with the following:

Multi-message signs offer an alternative sign display to that of standard signs in the Temporary (T Series), Regulatory (R Series), Warning (W Series) and Traffic Instruction (G Series) which are displayed singularly or sometimes as two signs with related messages. Multi-message signs, designated within the TM, RM, WM and GM Series, allow for the display of up to three logically related messages within a single uniform modular frame (see Clause 4.5.2).

Additional multi-message sign panels in common use for which there are no standard sign alternatives may be selected from Appendix A.

Further multi-message sign panels may be developed by state and territory authorities. Where this occurs, the sign specifications, conditions of use and permissible panel combinations should be consistently applied across all jurisdictions.

The conditions of use for multi-message signs are as follows, except when used to control pedestrians only:

- a) Multi-message sign shall have relevant messages consisting of a minimum of —
 - i. two 600 mm × 600 mm panels; or
 - ii. one 600 mm × 600 mm panel and one 1200 mm × 300 mm panel; or
 - iii. one 1200 mm × 600 mm panel.
- b) There shall be no more than one regulatory sign panel in the same multi-message sign frame displayed facing the direction of traffic. This excludes additional regulatory supplementary panels relating to and conditioning or otherwise the other regulatory sign panel(s) and which combine to form a single regulatory message.
- c) When used, regulatory sign panels shall be placed in the top position of the frame on the side closest to the traffic. This requirement does not apply to No Left (RM2-6A (L)) or No Right (RM2-6A (R)) Turn prohibition panels, these panels are installed on the side of the multi message assembly where the turn prohibition applies (see examples in Figure 4.2.2(a)).
- d) For multi-message signs facing traffic, within one frame, there should be no more than two message panels consisting of words only. If the 1200 mm × 600 mm space is filled with two separate 600 mm × 600 mm message panels, at least one of the 600 mm × 600 mm panels should be symbolic or a blank retroreflective yellow panel.

These requirements for text only multi message panels do not apply to the following arrangements:

- i. multi message signs installed in accordance with section 46 of the Transport Infrastructure Act 1994 for restricted road use notices, where, in most cases, three panels containing words are required (see examples in Figure 4.2.2(b))
 - ii. where police are performing traffic control duties and the 600 x 600 worded panels POLICE CONTROL AHEAD and PREPARE TO STOP are both required, see Figure 4.2.2(c) for examples, and
 - iii. where the 600 x 600 worded panels ROAD CLOSED AHEAD and LOCAL TRAFFIC ONLY are required, see Figure 4.2.2(d) for examples.
- e) A blank retroreflective yellow panel shall be placed within any unused module of the frame so that all panels in the frame are filled.
 - f) Multi-message sign panels (TM, RM, WM, GM Series) shall only be used in multimessage frames.

- g) There shall be no more than one blank retroreflective yellow panel used in a multi message sign. When a 600x600 blank retroreflective yellow panel is used, it should be located furthest from traffic, except where arrows or other direction related symbol panels are required in this location.
- h) Where multi message signs are used and a sign is required at the same location for both directions of travel, the following options may be applied:
 - i. use two separate multi message sign assemblies, placed back to back to face opposing directions of traffic, or
 - ii. if orientation and sight lines to opposing directions of traffic can be achieved, the one multi message assembly may be used with the panels installed back to back on the one frame.
- i) When used, the Speed Limit AHEAD and the END speed limit panels in MMS arrangements shall be placed in the top position of the frame on the side closest to the traffic.

The requirements in a) and g) do not apply when using the 1200 x 300 multi-message panel (TM5-1B) DETOUR with a small arrow, or (TM5-1-Q01) DETOUR with U-Turn symbol and there are no relevant messages that may be added to this assembly. In this case, a single TM5-1B or TM5-1-Q01 panel may be used as the top panel in a multi message frame with two blanks (see example in Figure 4.2.2(e)).

Further information regarding the multi-message signs and examples are provided in this Section, Appendices A and B, and the Austroads Guide to Temporary Traffic Management.

Figure 4.2.2(a) - Example multi-message signs with No Left / No Right Turn prohibition panels



Figure 4.2.2(b) – Examples of multi-message signs in accordance with the Transport Infrastructure Act 1994.



Figure 4.2.2(c) – Examples of multi-message signs for police



Figure 4.2.2(d) – Examples of multi-message signs for road closures



Figure 4.2.2(e) – Example of TM5-1B with two blanks



4.6 Signs and devices for work site approaches and departures

4.6.2 ROADWORK AHEAD (T1-1, TM1-1, T1-31, T1-Q06), ROADWORK X km AHEAD (T1-16)

Addition

The ROAD WORK AHEAD T1-Q06 sign (600 x 900) sign may be used in Queensland, however T1-Q06 shall only be used on narrow medians and shoulders where the standard sign T1-1 or T1-31 would not fit and would be an obstruction to traffic.

Add the ROAD WORK AHEAD T1-Q06 sign (600 x 900) to row four in Table 4.1(A):

<i>Sign</i>	<i>Sign number</i>	<i>Size, mm</i>
ROAD WORK AHEAD (Narrow format)	T1-Q06	600 x 900

Add the following image below Table 4.1(A):



T1-Q06

Difference

Replace:

The ROADWORK X km AHEAD sign should be used X km in advance of a road work site, where additional advance warning is necessary.

with:

Where additional advance warning is necessary, the ROADWORK X km AHEAD sign should be used X km in advance of the Primary PREPARE TO STOP sign (if traffic control is used), or the first cone in a taper (if a taper is used), or the start of the safety buffer area, and be at least two sign spacings in advance of the ROADWORK AHEAD sign.

4.6.7 ROADWORK ON SIDE ROAD (T1-25, TM1-25), ROAD PLANT ON SIDE ROAD (T1-27, TM1-27)

Difference

Replace:

The ROADWORK ON SIDE ROAD sign shall not be used on a side road to warn of relevant activities on the through road. The ROAD WORK AHEAD (TM1-1A) with a direction arrow (TM5-8A) should be used instead.

with:

The ROADWORK ON SIDE ROAD and ROAD PLANT ON SIDE ROAD signs shall not be used on the terminating leg of a T intersection to warn of relevant activities on the continuing leg of the T intersection. The ROAD WORK AHEAD (TM1-1A or TM1-1C) or ROAD PLANT AHEAD (TM1-3-1A or TM1-3-2C), with a direction arrow (TM5-8B) should be used instead.


The standard MMS Lane Status panel TM10-1A may be used with or without the ON SIDE ROAD message to indicate a direction where the long arrow TM5-8B is not suitable.

Addition

The ROADWORK ON SIDE road sign shall not be used where there is an impact for traffic on the through road. Impacts on the through road may include but not be limited to any need for reduced speed zones, additional delineation, changes to alignment or surface condition, use of traffic control or traffic queueing which extends onto the through road. Where there are impacts on the through road, the ROADWORK AHEAD sign (see Clause 4.6.2) should be used.

The ON SIDE ROAD message may be used to provide warning of an activity on another road which intersects with the road you are travelling on (this includes cross intersections and roundabouts but excludes the through / straight direction even if this is another road). However, the ON SIDE ROAD message shall not be used when you are travelling on the terminating leg of a T intersection to provide warning of an activity on the continuing leg of the T intersection. See Figure 4.6.7 below.

Figure 4.6.7 – Using the ON SIDE ROAD message

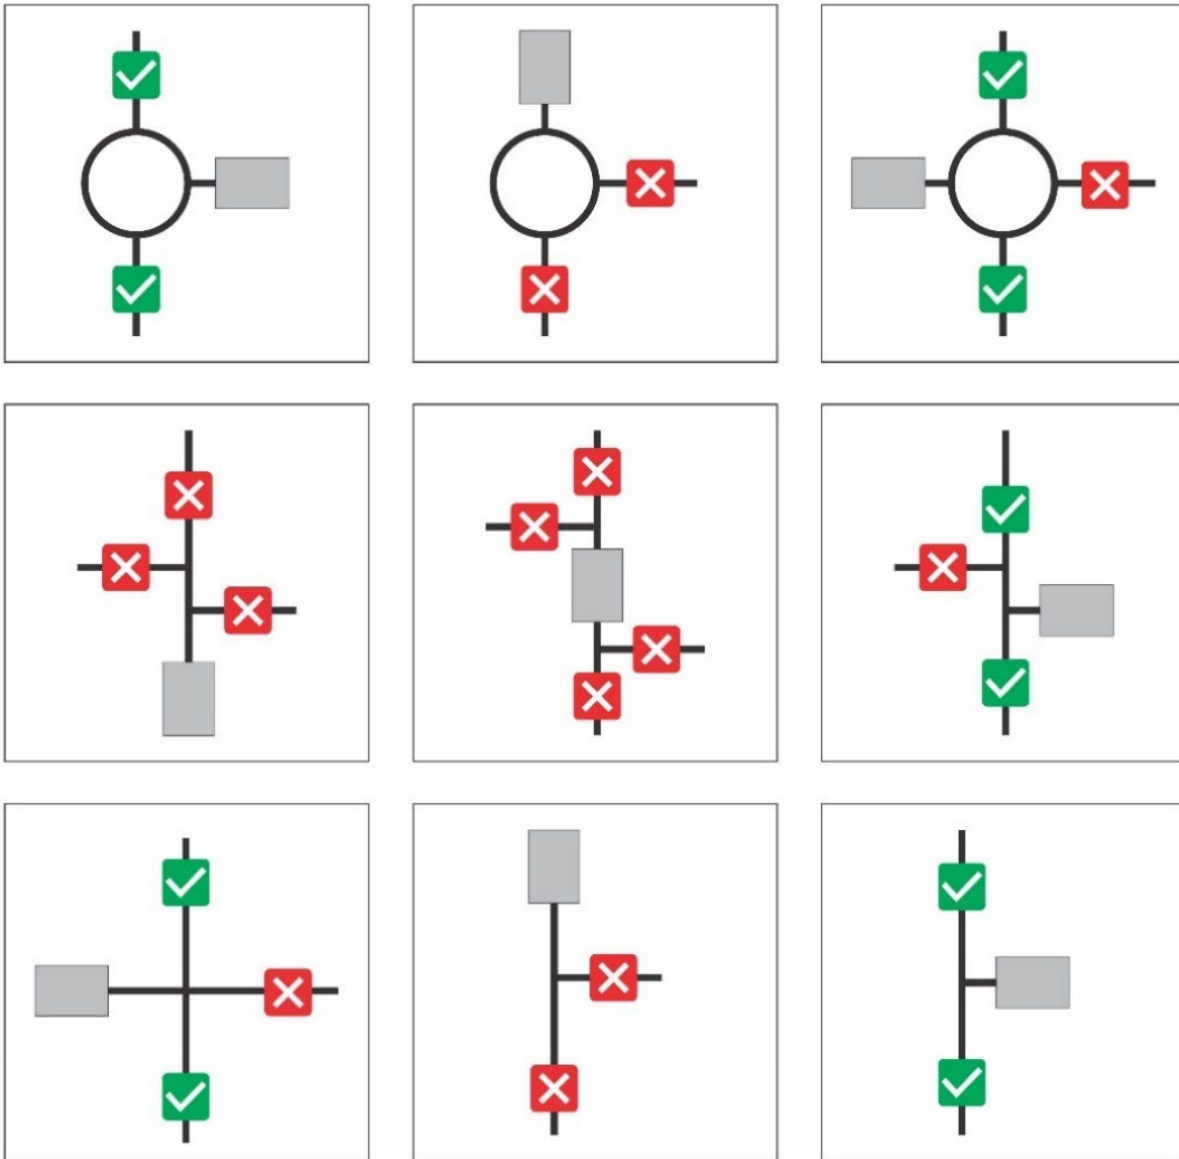

Notes

1. ✗ indicates the ON SIDE ROAD message shall not be used on this approach
2. ✓ indicates the ON SIDE ROAD message may be used on this approach
3. ■ indicates the work / activity area.

4.6.9 SIDE ROAD CLOSED (T1-32, TM1-32)

Difference

Replace:

The SIDE ROAD CLOSED sign shall be used in advance of an intersection where the side road is closed to all traffic.

with:

The SIDE ROAD CLOSED sign shall be used in advance of an intersection where the intersecting road is closed to all traffic. The SIDE ROAD CLOSED sign shall not be used on the terminating leg of a T intersection to indicate a closure on the continuing leg of the T intersection. In this case the ROAD CLOSED AHEAD (TM1-43A or TM1-43C) sign with a direction arrow (TM5-8B) should be used instead.

4.6.10 END ROADWORK (T2-16, T2-17, TM2-17)

Difference

Replace:

The END ROADWORK sign shall be used whenever there is a ROADWORK AHEAD or ROADWORK NEXT X km sign is used on the approach to the work site.

with:

The END ROADWORK sign shall be used whenever there is a ROADWORK AHEAD or ROADWORK NEXT X km sign is used on the approach to the work site, except where the requirements of Clause 4.6.11 would be applicable.

Addition

The END ROADWORK sign shall be used whenever a BRIDGEWORK AHEAD or BRIDGEWORK NEXT X km sign is used on the approach to the roadworks site.

The END ROADWORK sign may be used whenever a ROAD PLANT AHEAD or GRADER AHEAD, (with or without a NEXT X km sign) is used on the approach to the roadworks site.

4.6.11 ROADWORK AHEAD, ROADWORK ON SIDE ROAD, and END ROADWORK signs

New

This clause will outline with examples, the various requirements for advance warning signs (ROADWORK AHEAD, ROADWORK ON SIDE ROAD) and termination signs (END ROADWORK) for works on a 'No Through Road' or 'Cul-de-sac' or located partly or wholly on through or side roads.

This clause does not vary or alter the requirements or options in Clause 4.6.2 for when a ROADWORKS AHEAD or ROADWORKS X km AHEAD sign shall be or may be used. It also does not vary or alter the requirements in Clause 4.6.7 for the use of the ROADWORKS ON SIDE ROAD signs.

In accordance with the technical requirements, roads may require ROADWORK AHEAD signs or other signs warning of the works on another road, however this does not automatically mean that the END ROADWORK signs are required for traffic in the opposing direction. This clause will identify those locations or situations where the END ROADWORK sign may not be required.

Where roadworks is located on a side road with no impact on the through road the ROADWORK ON SIDE ROAD advance warning sign is used on the through road, see example Figure 4.6.11(a). The END ROADWORK sign is not required on the through road, except where the END ROADWORK sign is not able to be installed prior to the end of the side road. Where the END ROADWORK signs are not installed on the through road, the END ROADWORKS sign shall be installed on the side road prior to exiting the side road onto the through road.

Impacts on the through road from works on a side road may include but not be limited to any need for reduced speed zones, additional delineation, changes to alignment or surface condition, use of traffic control or traffic queueing which extends onto the through road.

Where roadworks is located on a side road which impact the through road, the ROADWORK AHEAD and END ROADWORK signs shall be used on both the through road and the side road, see example Figure 4.6.11(b).

Where roadworks are located on a 'No Through Road' or 'Cul-de-sac' the END ROADWORK sign may be omitted on the departure from the work area when travelling towards the terminating end of the road or cul-de-sac where there are no intersections between the end of the works and the terminating end of the road, and the end of the road or cul-de-sac is either visible from or within 500 m of the end of the work area, see example in Figure 4.6.11(c).

Where roadworks is located on a through road with no impact on a side road (located within the advance warning area), see example Figure 4.6.11(d), the ROADWORK AHEAD and END ROADWORK signs shall be installed on the through road. The ROADWORK AHEAD sign with a direction arrow shall be installed on the side road. On the side road, when departing the through road where road works are occurring via the side road (either before or after the road work area) and the road works have no impact on the side road or operation of the intersection with the side road, there is no requirement for an END ROADWORK sign on the side road, however it may be installed if desired.

Where roadworks is located on a through road which impact a side road, see example Figure 4.6.11(e), the ROADWORK AHEAD and END ROADWORK signs shall be installed on both the through road and the side road.

Figures 4.6.11(a), (b), (c), (d) and (e) are examples showing ROADWORK AHEAD and END ROADWORK signs only and do not include all traffic control devices required.

Figure 4.6.11(a) - Roadworks on a side road with no impact on the through road

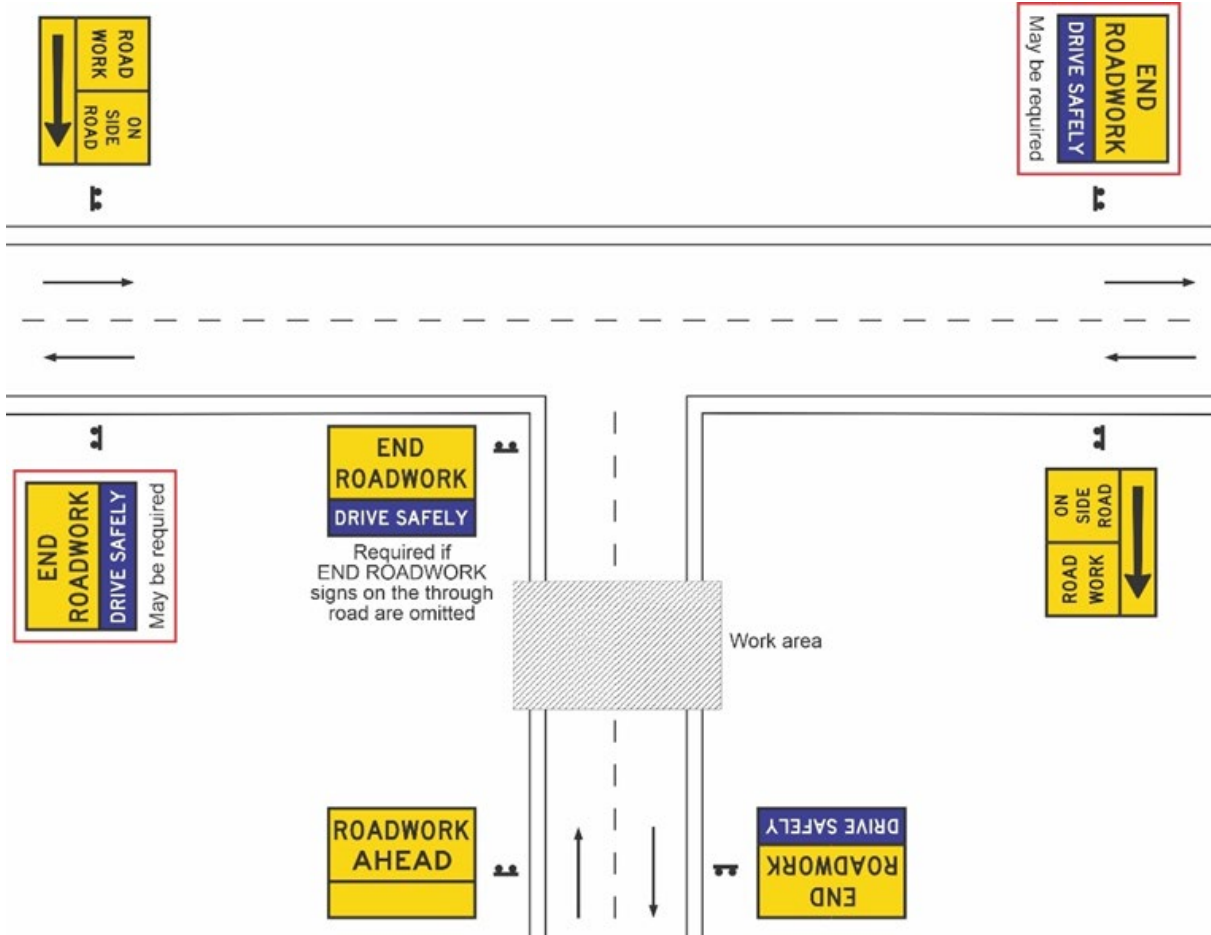


Figure 4.6.11(b) – Roadworks on a side road which has an impact on the through road

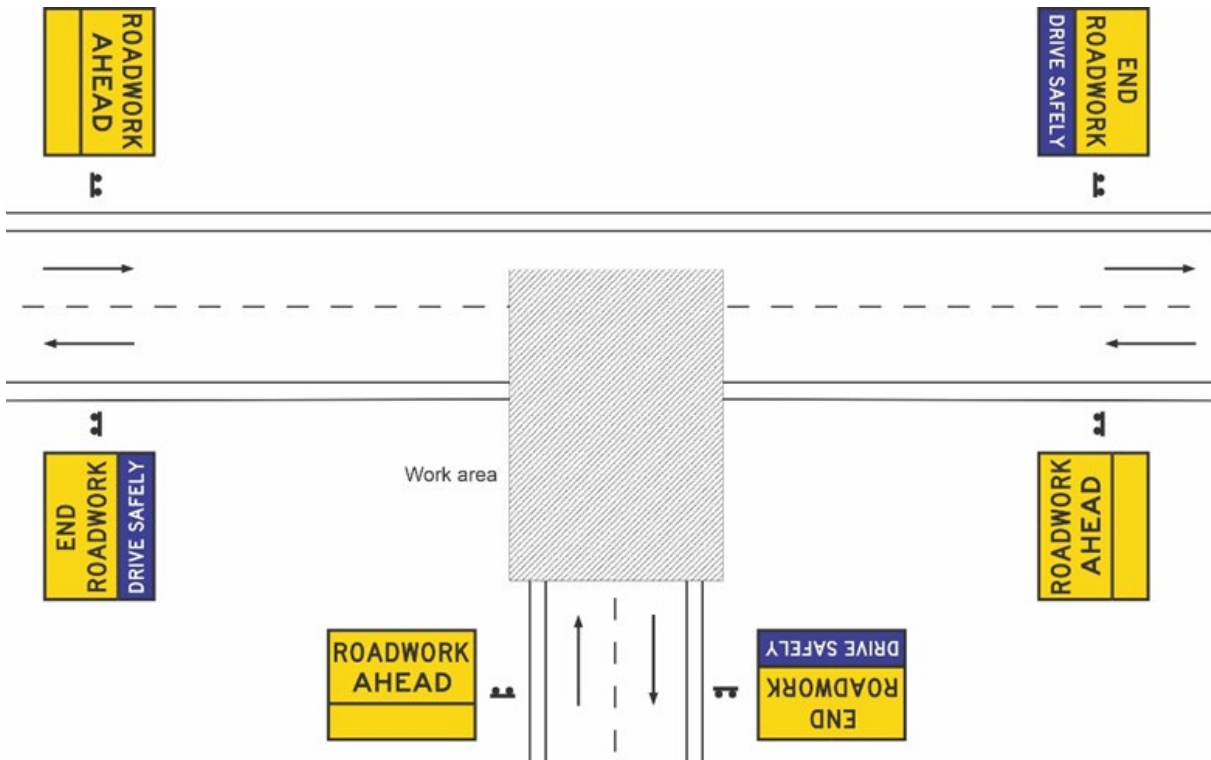


Figure 4.6.11(c) – Roadworks on a ‘No Through Road’ or ‘Cul-de-sac’

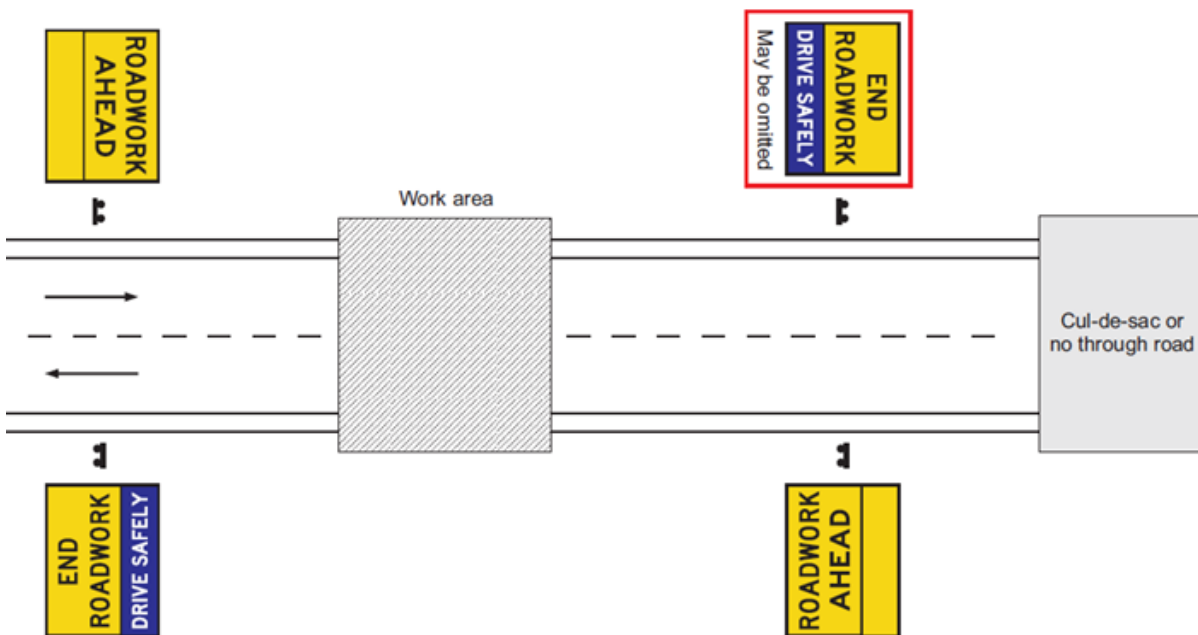


Figure 4.6.11(d) – Roadworks on a through road with no impact on the side road


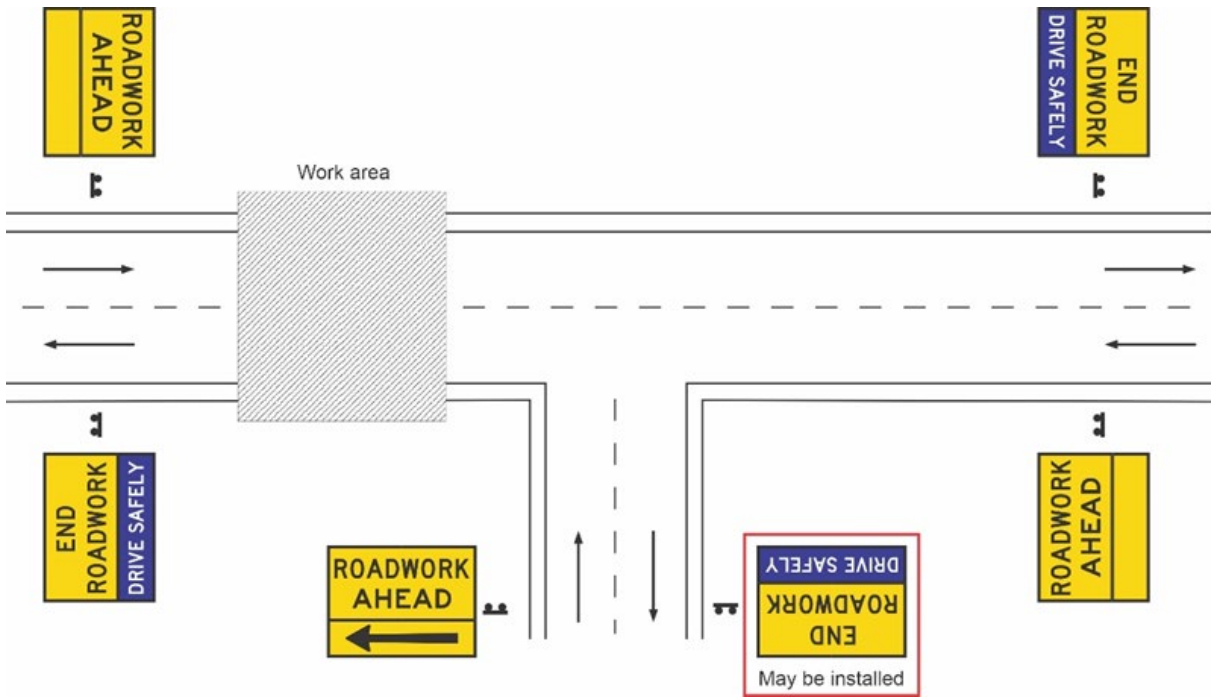


Figure 4.6.11(e) – Roadworks on a through road which has an impact on the side road

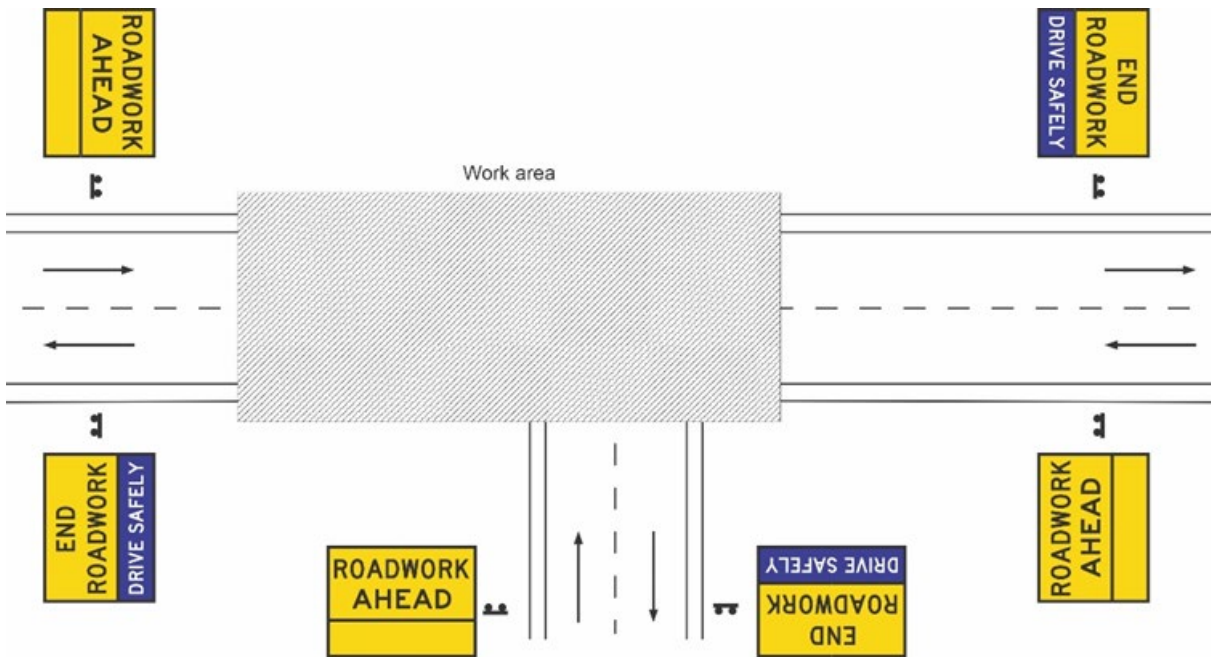

4.7 Signs and devices for regulatory control of traffic


4.7.2 Manual control

Addition

e) LED STOP / SLOW bat

Light emitting diode (LED)-enhanced STOP / SLOW bats may be used where enhanced visibility is desirable, such as during night works or when weather conditions such as rain or fog may limit the effectiveness of the standard bats. LED-enhanced STOP / SLOW bats shall comprise R6-8-QO1 and T7-1-QO1 on opposite faces of the STOP / SLOW bat, see Figure 4.7.2 following.

Figure 4.7.2 – LED-enhanced STOP / SLOW bat

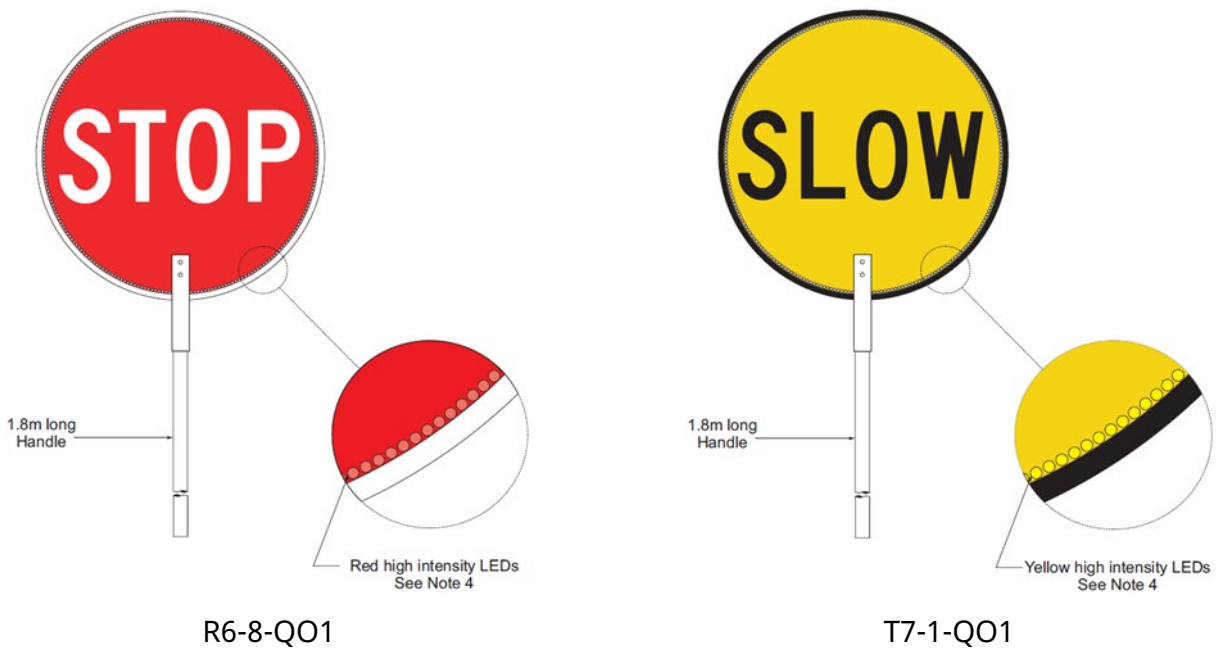

When used on state-controlled roads, LED-enhanced STOP / SLOW bats shall be as specified on Transport and Main Roads' [Approved products and registered suppliers](#) list.

4.7.3 Sign control, single lane operation

Difference

Replace the GIVE WAY and ONE LANE rows in Table 4.2(B):

<i>Sign</i>	Sign number	Size, mm
GIVE WAY	R1-2A	750 ht
	R1-2B	900 ht
	RM-2A	600 x 600
ONE LANE	R9-9A	600 x 400
	R9-9B	750 x 500
	RM9-9A	600 x 600

with:

<i>Sign</i>	Sign number	Size, mm
GIVE WAY	R1-2A	750 ht
	R1-2B	900 ht
	RM1-2-Q01A	600 x 600
	RM1-2-Q01C	1200 x 600
ONE LANE	R9-9A	600 x 400
	R9-9B	750 x 500
	RM9-9-Q01A	600 x 600
	RM9-9-Q01B	1200 x 600

(a) GIVE WAY (R1-2), GIVE WAY AHEAD (W3-2, WM3-2), ONE LANE (R9-9)

Difference

Replace dot points (i) and (iii):

- (i) the traffic volume is 150 vpd or less and the traffic speed (see Clause 1.3.16) is 70 km/h or less;
- (iii) the work area is less than 100 m in length; and

with

- (i) the traffic volume is 150 vph or less and the traffic speed (see Clause 1.3.16) is 70 km/h or less;
- (iii) the single lane or shuttle flow segment is less than 120 m in length; and

Addition

Add the following GIVE WAY and ONE LANE sign options.



RM1-2-Q01A



RM1-2-Q01C



RM9-9-Q01A



RM9-9-Q01B

4.7.6 Temporary speed limits

Difference

Replace the Speed Restriction row in Table 4.2(E):

<i>Sign</i>	Sign number	Size, mm
Speed Restriction	R4-1A	450 x 600
	R4-1B	600 x 800
	R4-1C	900 x 1200
	R4-1D	1200 x 1600
	RM4-1A	600 x 600


with:

<i>Sign</i>	Sign number	Size, mm
Speed Restriction	R4-1A	450 x 600
	R4-1B	600 x 800
	R4-1C	900 x 1200
	R4-1D	1200 x 1600
	RM4-1A	600 x 600
	RM4-1-Q01	1200 x 600

(a) Speed Restriction (R4-1, RM4-1)

Addition

Add the following Speed Restriction sign option.

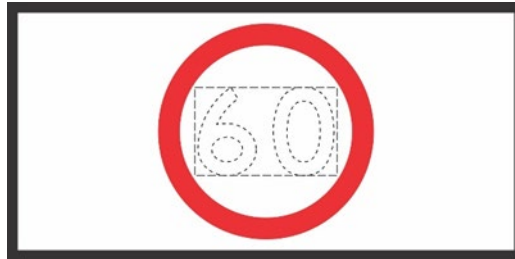

RM4-1-Q01

(c) END Speed Limit (R4-12, RM4-12)

Addition

In Queensland where an END Speed Limit is used, the speed limit which applies following this sign is the default speed limit applicable for that road environment of either a built-up area of 50 km/h or for a road this is not in a built-up area of 100 km/h.

4.8 Detour signs

4.8.3 DETOUR (T5-1, TM5-1)

Addition

Add the following rows to Table 4.3(C):

<i>Sign</i>	Sign number	Size, mm
DETOUR (U-Turn)	TM5-1-Q01	DETOUR (U-Turn)
Detour (U-Turn) Symbolic	TM5-1-Q02	600 x 600
U-TURN FACILITY AHEAD	TM5-1-Q03	600 x 600

Addition

For detour routes that include a U-turn requirement, the DETOUR U-turn (TM5-1-Q01), Detour U-turn (symbolic) (TM5-1-Q02), or the U-TURN FACILITY AHEAD (TM5-1-Q03) signs may be used.

The Detour U-turn (symbolic) (TM5-1-Q02) panel shall only be used with a DETOUR panel (TM5-7A or TM5-7B).



TM5-1-Q01



TM5-1-Q02



TM5-1-Q03

4.8.4 Detour marker (T5-6, TM5-6A)

Addition

When the Detour marker (TM5-6A) is used in a multi-message arrangement, the arrow panel should be located as follows:

- For an arrow pointing straight-ahead, locate the arrow closest to traffic, except where other direction related symbol panels (such as no right turn) are required in this location.
- For an arrow indicating a turn to the left or right, locate the arrow on the side of the multi-message arrangement the arrow is directing towards.

4.9 Road condition signs

4.9.1 Slippery (T3-3, TM3-3), SOFT EDGES (T3-6, TM3-6), ROUGH SURFACE (T3-7, TM3-7), Loose Stones (T3-9, TM3-9), GRAVEL ROAD (T3-13, TM3-13), LOOSE SURFACE (T3-14, TM3-14)

Difference

Replace:

If the hazardous conditions extend over a considerable length the signs may need to be repeated at regular intervals. Advisory Speed signs (T3-16) (see Clause 4.9.2) may be required in conjunction with these signs.

with:

If the hazardous conditions extend over a considerable length, the signs may need to be repeated at regular intervals which should not exceed 500 m. Advisory Speed signs (T3-16, TM3-16) (see Clause 4.9.2) or Speed Restriction signs (R4-1, RM4-1) (see Clause 4.7.6), may be required in conjunction with these signs.

Addition

Refer to Clause 3.4.2(b) for speed zones for traffic safety purposes, particularly where loose material or stones are present on the road surface or for new sprayed seal works where higher speeds may damage the new seal.

Where work is carried out under [MRTS11 Sprayed Bituminous Treatments \(Excluding Emulsion\)](#) or other Technical Specifications which require regulatory speed limits to be posted after resealing works, the requirements of those Technical Specifications regarding the installation of speed limit signs shall apply.

4.10 Signs and devices for road and lane closures

4.10.1 Signs

Difference

Replace the ROAD CLOSED row in Table 4.5:

Sign	Sign number	Size, mm
ROAD CLOSED	T2-4	1800 x 300
	TM2-4B	1200 x 300
	TM2-4C	1200 x 600

with:

Sign	Sign number	Size, mm
ROAD CLOSED	T2-4	1800 x 300
	TM2-4A	600 x 600
	TM2-4B	1200 x 300
	TM2-4C	1200 x 600

Addition

Add the following ROAD CLOSED sign option to item a)



TM2-4A

Addition

Where there is a need to advise drivers in advance of an upcoming road closure, the ROAD CLOSED X km AHEAD (T2-4-Q02) or ROAD CLOSED AHEAD (TM1-43A, TM1-43C) signs may be used. The ROAD CLOSED X km AHEAD sign should not be used as a substitute for detour provisions (see Clause 4.8), but rather as an additional advance measure to warn drivers of the upcoming road closure. The ROAD CLOSED X km AHEAD sign should be located X km ahead of the actual road closure point (where the ROAD CLOSED signs are located).

4.11 Devices for delineating and indicating the travelled path

4.11.1 Traffic cones and temporary bollards

Addition

Logos and marking may be used on cones and bollards for identity purposes. When used, it shall be limited to the non-retroreflective surface areas of the device.

4.11.3 Temporary hazard markers (T5-4, T5-5, T5-7)

Difference

Replace:

Temporary Hazard markers should be used to show any lateral change of direction of the travelled path through a work site and to delineate hazards and non-trafficable work areas adjacent to the travelled way. They should be erected with their edge about 1 m from the edge of the travelled path and the chevrons should always point to the side to which traffic is required to pass. They should be mounted at about 1 m above the pavement.

with:

Temporary Hazard markers should be used to show any lateral change of direction of the travelled path through a roadworks site and to delineate hazards and non-trafficable work areas adjacent to the travelled way. They should be erected with their edge about one metre from the edge of the travelled path and the chevrons should always point to the side to which traffic is required to pass.

Temporary Hazard markers (T5-4 and T5-5) should be mounted at about one metre above the pavement. The T5-7 Temporary Hazard marker is designed to be mounted in 'weighted' temporary plastic or rubber support placed on the ground. The TM5-5A panels are used in a multi-message frame arrangement and mounted at the standard height for a multi-message frame.

Addition

The narrow vertical KEEP LEFT sign (R2-3-Q01) may be substituted for the T5-7 Temporary Hazard marker where a regulatory KEEP LEFT sign is more appropriate.

4.11.6 Temporary kerbing

Addition

Temporary kerbs may be used at roadworks sites as a means of narrowing traffic lanes. The installation of a kerb changes the environment sufficiently to reduce vehicle speed. Kerbs should be run-over type so that, in the event of an errant vehicle mounting the kerb, the driver is able to control the vehicle.

Delineators may be installed with temporary kerbs to guide traffic through the roadwork zone. Where delineators are used, these shall be black and yellow in colour. The bars shall be aligned to point down to the left if vehicles are to pass to the left and shall be aligned to point to the right if vehicles are to pass to the right of the kerb.

4.12 Containment fences and road safety barrier systems

4.12.3 Road safety barrier systems

Addition

Only road safety barriers included on the current list of accepted products in the Transport and Main Roads [Accepted Road Safety Systems and Devices](#) document shall be used at roadworks sites in Queensland.

4.14 Vehicle mounted signs and devices

4.14.1 Vehicle mounted warning device

Difference

Replace entire Clause 4.14.1 with the following:

A vehicle mounted warning device shall consist of one of the following arrangements in Table 4.14.1.

Table 4.14.1 – Vehicle mounted warning devices

Arrangement	Vehicle Mounted Warning Device (VMWD)	Use conditions / requirements
1	A single flashing yellow lamp or LED light assembly	<ul style="list-style-type: none"> • For emergency or other infrequent use on a vehicle not normally used for either roadworks or inspection purposes. • For use on a plant item working within a static work area.
2	A pair of flashing yellow lamps or LED light assemblies (placed as far apart as practical)	<ul style="list-style-type: none"> • For use on vehicles on all roads without the protection of a static roadworks site. • Positioned on the vehicle so that at least one, and preferably both lamps are visible to all road users from any direction. • Additional flashing yellow lamp(s) or LED assemblies may be required to be added on the vehicle to ensure visibility is provided to all road users in any direction.
3	An illuminated flashing arrow sign (see MUTCD Part 3 Clause 4.14.2)	<ul style="list-style-type: none"> • For any situation where option 1 or 2 is not appropriate. • May be used for any type of work (including mobile works). • May be used in combination with options 1 or 2. • If required, supplementary signs (static or variable message signs) are mounted in conjunction or elsewhere in a prominent position on the vehicle. • The illuminated flashing arrow sign must be capable of being removed from view (e.g. covering, folding down, or turning off) when not needed.

The vehicle-mounted warning device shall be mounted as high as practicable on the vehicle for best visibility to other traffic, e.g. on top of the cab of a truck. It may need to be placed near the rear of the vehicle if a cab-mounted sign could be obscured by a load. Supplementary signs used in conjunction with the illuminated flashing arrow sign (see Clause 4.14.3), may be mounted either in conjunction with that sign or elsewhere in a prominent position on the vehicle.

Where signs are mounted on the device or elsewhere on a vehicle, they shall be capable of being removed from view (e.g. by covering, folding, or turning off) when not needed.

If not specified elsewhere, the minimum sight distance from approaching road users to the vehicle mounted warning device shall be:

- 150 m if the speed is 60 km/h or less
- 250 m if the speed is more than 60 km/h.

While the requirements in this document apply once published Transport and Main Roads recognises that making immediate changes to flashing lamps on inspection vehicles may require a greater lead in time to ensure compliance. In recognition of this, inspection vehicles (other than those used for emergency or other infrequent use) shall comply with the requirements in item (b) by the 31 July 2027.

4.17 Signs and devices for managing pedestrians

Difference

Replace the FOOTPATH CLOSED row in Table 4.10:

Sign	Sign number	Size, mm
FOOTPATH CLOSED	T8-4	900 x 600
	TM8-4A	600 x 600

with:

Sign	Sign number	Size, mm
FOOTPATH CLOSED	T8-4	900 x 600
	TM8-4A	600 x 600
	TM8-4C	1200 x 600

Addition

Add the following FOOTPATH CLOSED sign option to item c)



TM8-4C

4.20 Other signs and devices

4.20.1 General

Difference

Replace the Trucks (rectangle and square) row in Table 4.14:

<i>Sign</i>	<i>Sign number</i>	<i>Size, mm</i>
Trucks (Rectangle and square)	T2-25	900 x 600
	TM2-25A	600 x 600

with:

<i>Sign</i>	<i>Sign number</i>	<i>Size, mm</i>
Trucks (Rectangle and square)	T2-25	900 x 600
	TM2-25A	600 x 600
	TM2-25-Q01C	1200 x 600

Addition

Add the following Trucks (Rectangle and square) sign option to item a)



TM2-25-Q01C

4.22 Variable message signs used at roadworks

4.22.3 Message screens

Difference

Replace:

- (d) Where there are alternating screens the “on” time of each screen shall be 0.6 ± 0.1 s per word or number and the total time required to read the message on both screens shall be taken into account when determining message length and letter height.

NOTE A procedure for determining letter sizes for signs is given in AS 1742.2. The letter series that most nearly matches the on-screen fonts should be used in the calculations. It is recommended that the calculated letter height be doubled for this purpose.

with:

- (d) Where there are alternating screens the “on” time of each screen shall be (0.6 ± 0.1) s per word or number and the total time required to read the message on both screens shall be taken into account when determining message length and letter height.

NOTE A procedure for determining letter sizes for signs is given in AS 1742.2. The letter series that most nearly matches the on-screen fonts should be used in the calculations. It is recommended that the calculated letter height be doubled for this purpose.

4.23 Use of supplementary devices at roadworks to reduce speed

New

Supplementary traffic control devices may be used roadworks to reduce speed. These devices include:

- a) speed indicator devices
- b) rumble strips / rumble mats
- c) UHF radio broadcasts, and
- d) temporary portable speed humps,

For information, refer to the [Guideline – Traffic Management at Works on Roads](#).

4.24 Display of electronic signs


New

Electronic signs may be substituted for static signs. Electronic variable speed limit signs shall comply with the requirements of [AS 5156 Electronic speed limit signs](#). Variable message signs shall comply with the requirements of [MRTS229 Electronic Traffic Control Signs](#) and [MRTS262 Temporary Variable Message Signs](#) as appropriate. The display of electronic signs shall comply with the following principles:

- a) symbols / signs shall be shown in the reversed colour scheme to the appropriate static sign
- b) legends shall also be shown in the reversed colour scheme to the appropriate static sign, with red text only used to display the PREPARE TO STOP or REDUCE SPEED message; orange text is used to display the LINE MARKERS AHEAD message while yellow text is used to display the LINE MARKING AHEAD message
- c) the annulus on a speed limit sign shall be red with the speed limit displayed in a white legend
- d) yellow shall be the only colour legend used on electronic signs to display general roadwork messages, and
- e) where noted on the TC sign drawings, compliance with the relevant Main Roads Technical Specification (MRTS) documents is required.

Examples of electronic signs are shown in Figure 4.24.

Figure 4.24 - Examples of electronic signs

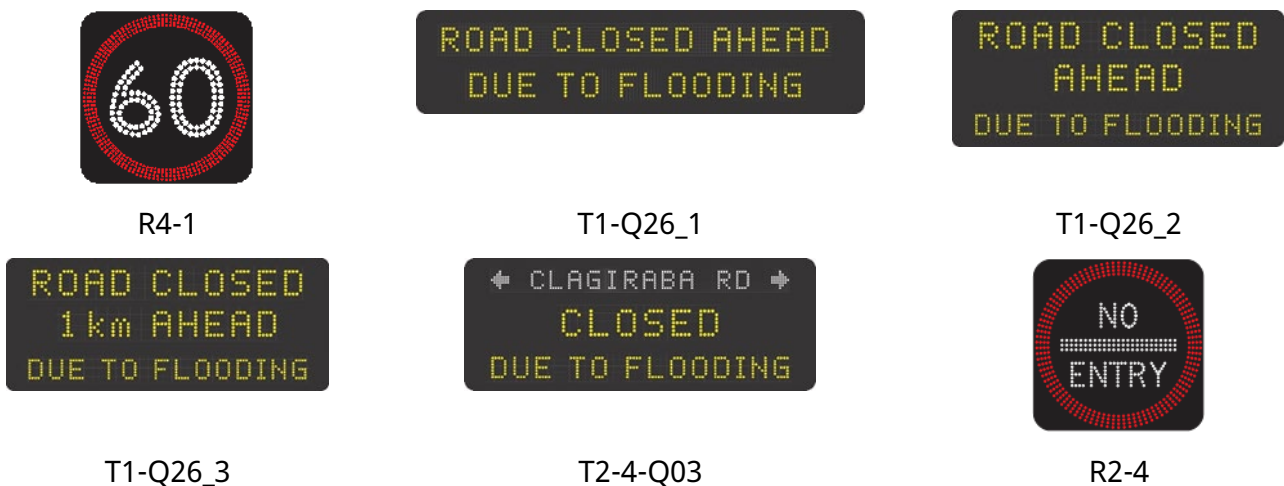



TM1-46-Q01_1



TM1-46-q01_2



R2-4-Q01_1



R2-4-Q01_1



R2-6(L)



R2-6(R)



W8-15(L)



W8-15(R)



R2-5



TM10-3A, TM10-5A, TM10-7A, TM10-9A



T1-5, TM1-5A



TM1-Q01_1



T1-18



T1-34, TM1-34A



TM1-40-Q01_1



TM1-40A



R4-12



G9-79

4.25 Changeable message signs

New


To remotely change the display of static signs, and as an alternative to using full electronic displays for static signs, a changeable message sign may be used.

Changeable message signs use a remote-operated, mechanical change system of displaying up to a maximum of three pre-set messages on the one sign face.

The individual sign faces are split into a series of vertical prisms (three-sided) which can mechanically rotate to display up to three different signs or sign arrangements (in the case of a multi-message sign), as shown in Figure 4.25.

Changeable message signs shall comply with the Main Roads Technical Specification MRTS249 *Transportable Changeable Message Signs*.

Figure 4.25 – Example changeable message sign

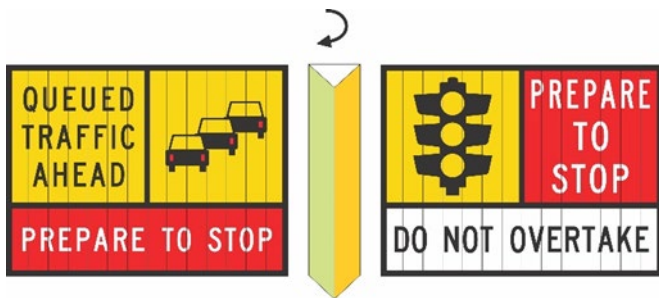

Appendices




Appendix A – Additional multi-message signs (normative)






A.3 List of additional multi-message sign panels



Difference





The following replaces the corresponding signs included in Table A.1 in AS 1742. These revised multi-message sign panels are for use in Queensland only.



Table A.1 – List of additional multi-message sign panels

Sign	Sign number	Size (mm)	Figure	Notes
SURVEYORS AHEAD	TM1-37C	1200 x 600		The SURVEYORS AHEAD sign may be used for surveying works, in lieu of the Workers (symbolic) (T1-5, TM1-5A or TM1-5C sign).
ROAD PLANT ON SIDE ROAD	TM1-48C	1200 x 600		This sign is the same as TM1-27C. Refer to Clause 4.6.7 for requirements.
DO NOT OVERTAKE	GM9-90B	1200 x 300		This sign may be used in conjunction with another panel placed above it describing why overtaking is prohibited. The DO NOT OVERTAKE panel shall only be used where overtaking is or was possible (or may be attempted), however due to a change in conditions overtaking is no longer possible or considered safe and is to be prohibited.

Sign	Sign number	Size (mm)	Figure	Notes
SURVEYORS	TM2-35B	1200 x 300		The SURVEYORS sign may be used for surveying works, in lieu of the Workers (symbolic) (T1-5, TM1-5A or TM1-5C sign).
SIDE ROAD CLOSED	TM2-43A	600 x 600		Refer to Clause 4.6.9 for requirements.
WATER OVER ROAD	TM3-21A	600 x 600		This sign shall only be used to indicate that the road is trafficable with care although there is water over the road.
Horizontal Arrow	TM5-8B	1200 x 300		<p>This sign shall not be used with a regulatory sign.</p> <p>This sign may be used with an ON SIDE ROAD panel to indicate the direction of the side road where road work is being carried out as shown below.</p>  <p>This sign may be used with other relevant panels (excluding regulatory panels) to indicate a direction where the warning applies.</p> <p>When used on a through road it should be used with an ON SIDE ROAD message, however when used on a side road to warn of activities on a through road the ON SIDE ROAD message shall not be used.</p>

Sign	Sign number	Size (mm)	Figure	Notes
ON SIDE ROAD	TM5-9A	600 x 600		<p>This sign may be used in advance of an intersection to warn of the relevant activities on another road where there is insufficient distance on the other road from the intersection to the start of the works for turning traffic to be given adequate warning.</p> <p>This sign shall not be used with a regulatory sign.</p> <p>This sign shall not be used with the Detour marker (TM5-6A), with the preferred arrow to indicate the direction of the side road where road work is being carried out, being the 1200 x 300 Horizontal Arrow (TM5-8B) as shown following.</p> <p>This sign shall not be used on the terminating leg of a T intersection to warn of relevant activities on the continuing leg of the T intersection. The ROAD WORK AHEAD (TM1-1A or TM1-1C) with a direction arrow (TM5-8B) should be used instead.</p>
	TM5-9B	1200 x 300		 <p>In Queensland, the 600 x 600 arrow (TM10-1A) may be used if the TM5-8B arrow is not suitable.</p>



Sign	Sign number	Size (mm)	Figure	Notes
ON SIDE ROAD L / R	TM5-10B (L)	1200 x 300		<p>This sign may be used in advance of an intersection to warn of the relevant activities on another road where there is insufficient distance on the other road from the intersection to the start of the works for turning traffic to be given adequate warning.</p> <p>This sign shall not be used with a regulatory sign.</p> <p>This sign shall not be used on the terminating leg of a T intersection to warn of the relevant activities on the continuing leg of the T intersection. The ROAD WORK AHEAD (TM1-1A or TM1-1C) sign with a direction arrow (TM5-8B) should be used instead.</p>
	TM5-10B (R)	1200 x 300		
EVENT ON SIDE ROAD	TM9-4C-Q01	1200 x 600		<p>This sign may be used in advance of an intersection to warn of an event on another road where there is insufficient distance on the other road from the intersection to the start of the event for turning traffic to be given adequate warning.</p> <p>This sign should be used with the 1200 x 300 Horizontal Arrow (TM5-8B) to indicate the direction of the side road where the event is being held. Example:</p> <div style="text-align: center;">  </div> <p>This sign shall not be used on the terminating leg of a T intersection to warn of an event on the continuing leg of the T intersection. The EVENT AHEAD sign with a direction arrow (TM5-8B) should be used instead.</p>






Sign	Sign number	Size (mm)	Figure	Notes
EVENT ON SIDE ROAD L / R	TM9-5B (L)	1200 x 300		<p>This sign may be used in advance of an intersection to warn of an event on another road where there is insufficient distance on the other road from the intersection to the start of the event for turning traffic to be given adequate warning.</p> <p>This sign shall not be used with a regulatory sign.</p> <p>This sign shall not be used on the terminating leg of a T intersection to warn of an event on the continuing leg of the T intersection. The EVENT AHEAD sign with a direction arrow (TM5-8B) should be used instead.</p>
	TM9-5B (R)	1200 x 300		



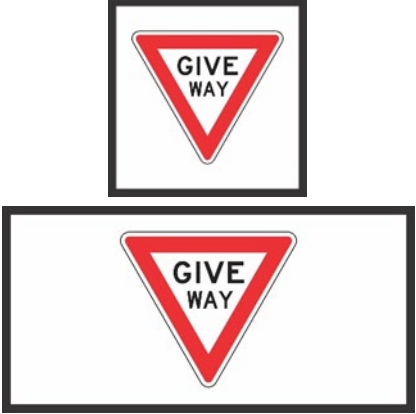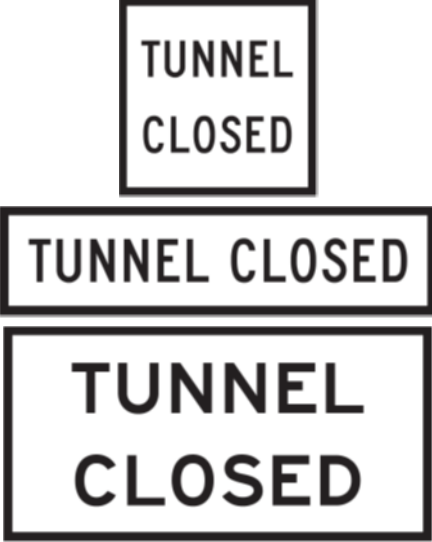


Addition


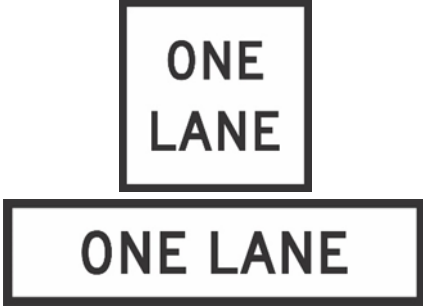


The additional multi-message sign panels detailed in Table A.2 are accepted for use in Queensland.




Table A.2 – List of additional multi-message sign panels for use in Queensland



Sign	Sign number	Size (mm)	Figure	Notes
Regulatory				
GIVE WAY	RM1-2-Q01A RM1-2-Q01C	600 x 600 1200 x 600		
TUNNEL CLOSED	TM2-4-Q02A TM2-4-Q02B TM2-4-Q02C	600 x 600 1200 x 300 1200 x 600		






Sign	Sign number	Size (mm)	Figure	Notes
Speed limit	RM4-1-Q01	1200 x 600		Examples 
Load Information Panels	RM6-Q01_1 RM6-Q01_1 RM6-Q01_1 RM6-Q01_2	1200 x 300		See Clause 4.2.8.
FOUR WHEEL DRIVE VEHICLES EXCEPTED	RM7-Q01	1200 x 300		Refer to Q-series sign notes.
AT ... (STREET / ROAD NAME)	GM-91-Q01	1200 x 300		May only be used on advance warning signs to advise of regulatory controls on intersecting streets / roads.



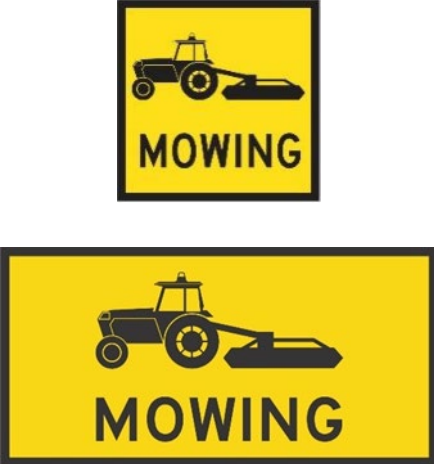

Sign	Sign number	Size (mm)	Figure	Notes
GROSS LOAD LIMIT	RM6-Q03_1	600 x 600		See Clause 4.2.8 and Q-series sign notes.
MAXIMUM PENALTY 200 PENALTY UNITS	RM6-Q02	600 x 600		Refer to Q-series sign notes.
LOCAL TRAFFIC EXCEPTED	RM9-Q01_A RM9-Q01_B	600 x 600 1200 x 300		See Clause 4.8.10 and Q-series sign notes.
LOCAL ACCESS PERMITS EXCEPTED	GM9-40-2-Q02	1200 x 300		Refer to Q-series sign notes.
END Speed Limit	RM4-12-Q01	600 x 600		See Clause 4.7.6(c) and Q-series sign notes.








Sign	Sign number	Size (mm)	Figure	Notes
WORK VEHICLES EXCEPTED	TM2-Q10	1200 x 300		
ONE LANE	RM9-9-Q01A RM9-9-Q01B	600 x 600 1200 x 300		
Advance				
BUILDING WORK AHEAD	TM1-1-Q01A TM1-1-Q01C	600 x 600 1200 x 600		<p>The BUILDING WORK AHEAD sign may be used where construction activities are located on private property next to a road and the construction activities may impact on the operation of the road.</p> <p>Examples</p> 







Sign	Sign number	Size (mm)	Figure	Notes
LINE MARKERS AHEAD	TM1-40-Q01_1	600 x 600		The LINE MARKERS AHEAD sign may be used where line markers are on foot, in lieu of Workers (symbolic) (T1-5 or TM1-5A or TMI-5C). See T1-Q08 in Appendix C.
SURVEYORS AHEAD	TM1-37-Q01	600 x 600		The SURVEYORS AHEAD sign may be used for surveying works, in lieu of the Workers (symbolic) (T1-5, TM1-5A or TM1-5C sign).
TUNNEL CLOSED AHEAD	TM1-43-Q01A TM1-43-Q01C	600 x 600 1200 x 600		







Sign	Sign number	Size (mm)	Figure	Notes
REDUCE SPEED	TM1-Q01_1 TM1-Q01_2	600 x 600 1200 x 300		<p>The REDUCE SPEED sign shall only be used to supplement:</p> <ul style="list-style-type: none"> • a Speed Restriction sign at the start of a reduced speed limit (temporary or permanent), or • the first Speed Restriction sign on approach to the works (which may be a repeater Speed Restriction sign for the permanent speed zone), or • a Speed Limit AHEAD sign.
Trucks	TM2-25-Q01C	1200 x 600		




Sign	Sign number	Size (mm)	Figure	Notes
Tractor / Slasher MOWING	TM2-30-Q01A TM2-30-Q01C	600 x 600 1200 x 600		<p>Refer to QGTTM Part 5 Clause 5, T1-Q10 in Appendix C, Q-series sign notes, and examples below.</p> 
RUMBLE STRIPS AHEAD	TM1-Q02	600 x 600		<p>Refer to QGTTM Part 3 Clause 5.5.3 and Q-series sign notes.</p>
Speed Limit AHEAD	GM9-79-Q01	600 x 600		<p>See Clause 4.7.6(d) and Q-series sign notes.</p>
PROBABLE DELAY 15 MIN	TM1-Q03	600 x 600		<p>To be used to inform motorists of probable delay. Where delays greater than 15 minutes may be experienced, refer to the requirements of QGTTM Part 3 Section 3.4.</p>




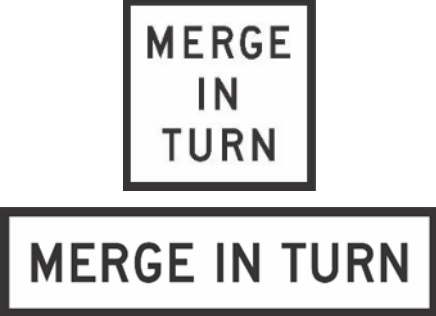
Sign	Sign number	Size (mm)	Figure	Notes
RAMP SPEED	RM4-Q01	600 x 600		Refer to Q-series sign notes.
Merging Traffic (L / R)	TM2-Q01(L) TM2-Q01(R)	600 x 600 600 x 600		Refer to Q-series sign notes.
CROSSING ROAD AHEAD	TM1-Q04	600 x 600		Refer to Q-series sign notes.
Deep Edge Drop (symbolic)	TM3-25-Q01	600 x 600		The DEEP EDGE DROP sign shall be used to give warning of a deep drop or excavation adjacent to the travelled path. Should be used with TM3-25A.



Sign	Sign number	Size (mm)	Figure	Notes
Shoulder Drop Off (symbolic)	TM3-Q01_2	600 x 600		Refer to Q-series sign notes.
ELECTRIC WIRES DOWN	TM4-Q01	600 x 600		Refer to Q-series sign notes.
Temporary Hazard Marker	TM5-5A	600 x 600		See example following and sign design notes 
DETOUR U-Turn	TM5-1-Q01	1200 x 300		
Detour U-Turn (symbolic)	TM5-1-Q02	600 x 600		Shall only be used with a DETOUR panel (TM5-7A or TM5-7B). Examples 




Sign	Sign number	Size (mm)	Figure	Notes
U-TURN FACILITY AHEAD	TM5-1-Q03	600 x 600		
Lateral Shift marker	TM8-Q01	1200 x 300		See Clause 4.11.3 and Q-series sign notes.
LAND SLIP	TM3-Q02	1200 x 300		The LAND SLIP sign may be used to give advance warning of a land slip.
SIGNALS UNDER REPAIR	TM2-50-Q01	1200 x 300		Refer to Q-series sign notes.
Direction Arrow	Use TM10-1A	600 x 600		The standard MMS Lane Status panel TM10-1A may be used indicate a direction where required. For example, with ETM15. May be used with the ON SIDE ROAD message where the long arrow TM5-8B is not suitable. TM10-1A shall not be used to indicate a direction for a DETOUR (use the Detour marker TM5 6A).
DRIVE SLOWLY	TM2-Q09	1200 x 300		






Sign	Sign number	Size (mm)	Figure	Notes
TREE WORK	TM2-Q13	1200 x 300		
TURN ON HAZARD LIGHTS WHEN QUEUED	TC2362_1	1200 x 600		Refer to TC sign notes and example below. 
TURN OFF HAZARD LIGHTS	TC2362_2	1200 x 600		Refer to TC sign notes and example below. 
SITE ACCESS ONLY	TM2-Q11	600 x 600		

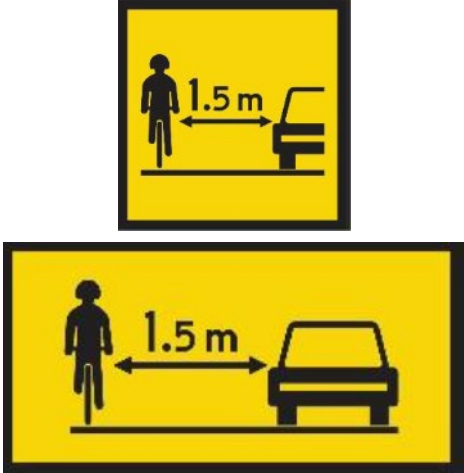




Sign	Sign number	Size (mm)	Figure	Notes
EXIT / EXIT No / DIRECTION ARROW	TM2-Q12	600 x 600		Refer to Q-series sign notes
Position				
Lane Status	TM10-Q01_7	600 x 600		See Clause 4.10.1(b) and Q-series sign notes.
Lane Status	TM10-Q01_8	600 x 600		See Clause 4.10.1(b) and Q-series sign notes.






Sign	Sign number	Size (mm)	Figure	Notes
Lane Status	TM10-Q01_4	600 x 600		See Clause 4.10.1(b) and Q-series sign notes.
Lane Status	TM10-Q01_5	600 x 600		See Clause 4.10.1(b) and Q-series sign notes.
WHEN QUEUING USE BOTH LANES	TM2-Q04	600 x 600		Refer to Q-series sign notes.
MERGE IN TURN	TM2-Q05A TM2-Q05B	600 x 600 1200 x 300		Refer to Q-series sign notes.






Sign	Sign number	Size (mm)	Figure	Notes
Pedestrians and cyclists				
Pedestrians Left / Right (symbolic)	TM8-Q02(R) TM8-Q02(L)	600 x 600 600 x 600		See Clause 4.17(b).
Share The Road (for roads with 60 km/h or less speed zones) (symbolic)	TM8-Q03_1 TM8-Q03_2	600 x 600 1200 x 600		For speed zones 60 km/h or less. Refer to Q-series sign notes.





Sign	Sign number	Size (mm)	Figure	Notes
Share The Road (for roads greater than 60 km/h speed zones) (symbolic)	TM8-Q04_1 TM8-Q04_2	600 x 600 1200 x 600	 <p>The figure shows two yellow signs. The top sign is square (600 x 600 mm) and depicts a pedestrian on the left and a car on the right, with a double-headed arrow between them labeled '1.5 m'. The bottom sign is rectangular (1200 x 600 mm) and depicts a cyclist on the left and a car on the right, with a double-headed arrow between them labeled '1.5 m'.</p>	For speed zones greater than 60 km/h. Refer to Q-series sign notes.
SHARE THE ROAD	TM8-Q05_1 TM8-Q05_2	600 x 600 1200 x 300	 <p>The figure shows two yellow signs. The top sign is square (600 x 600 mm) and contains the text 'SHARE THE ROAD' in bold black capital letters. The bottom sign is rectangular (1200 x 300 mm) and also contains the text 'SHARE THE ROAD' in bold black capital letters.</p>	Refer to Q-series sign notes.
Road condition				
Potholes Ahead (symbolic)	TM3-Q03	600 x 600	 <p>The figure shows a square yellow sign (600 x 600 mm) depicting a car driving over a pothole, with a starburst indicating an impact or hazard.</p>	See Clause 4.9.1.



Sign	Sign number	Size (mm)	Figure	Notes
Slippery - OIL	TM3-3-Q01	600 x 600		See Clause 4.9.1 and Q-series sign notes.
WET TAR	TM3-20-Q01	600 x 600		See Clause 4.9.1.
WATER OVER ROAD	TM3-21-Q01	1200 x 300		This sign shall only be used to indicate that the road is trafficable with care although there is water over the road.
DAMAGED ROAD	TM3-Q04	1200 x 300		See Clause 4.9.1.
RUMBLE STRIPS	TM2-Q02	600 x 600		Refer to QGTTM Part 3 Clause 5.5.3 and Q-series sign notes.



Sign	Sign number	Size (mm)	Figure	Notes
DO NOT OVERTAKE UNLESS SAFE	TM3-12-Q01	1200 x 600		Refer to Q-series sign notes and example below. 
Termination				
END FIRE FIGHTING	TM4-Q02_2	600 x 600		Refer to Q-series sign notes.
END LOAD LIMIT	RM6-Q03_2	600 x 600		Shall be used to indicate the end of a vehicle load limit. See Clause 4.2.8 and Q-series sign notes.
DRIVE SAFELY	TM2-Q06	1200 x 300		The DRIVE SAFELY sign shall only be used with the END ROADWORK, END DETOUR or END EVENT panels in place of a yellow blank panel.



Sign	Sign number	Size (mm)	Figure	Notes
Incident, Fire and Emergency				
FIRE FIGHTERS AHEAD	TM4-Q02_1	1200 x 600		May be used in advance of a firefighting activity.
Enforcement				
ROADWORK SPEED LIMITS ARE ENFORCED	TC2361C	1200 x 600		Refer to TC sign notes, QGTTM Part 3 Section 5.5.4 and examples below. 
Camera (symbolic)	TC2361B	1200 x 300		Refer to TC sign notes and QGTTM Part 3 Section 5.5.4. This sign shall only be used with TC2361C as shown below. 




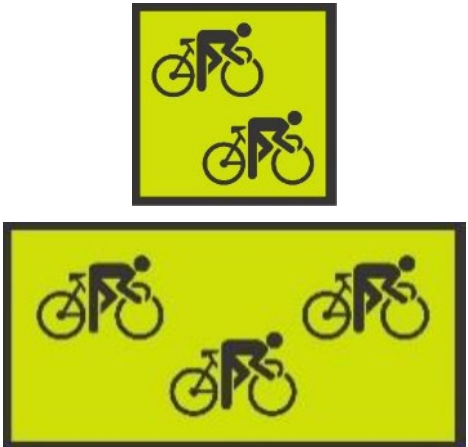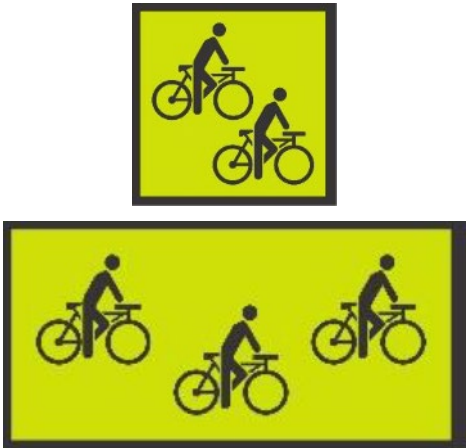

Sign	Sign number	Size (mm)	Figure	Notes
Orange Target Board to Multi-message sign frame	TC2365	1400 x 1100		<p>A 100 mm-wide fluorescent orange border may be added to a multi-message frame (examples shown below).</p> <div style="display: flex; justify-content: space-around; align-items: center;">   </div>
Miscellaneous				
OVERSIZED Farm Machinery	TM2-45-Q01	600 x 600		Refer to Q-series sign notes.
POLICE CONTROL AHEAD	TM1-Q05	600 x 600		Refer to Q-series sign notes.

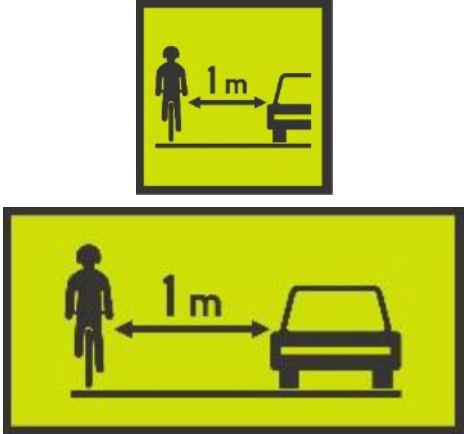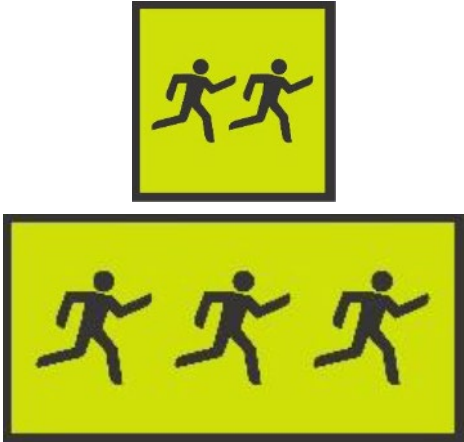

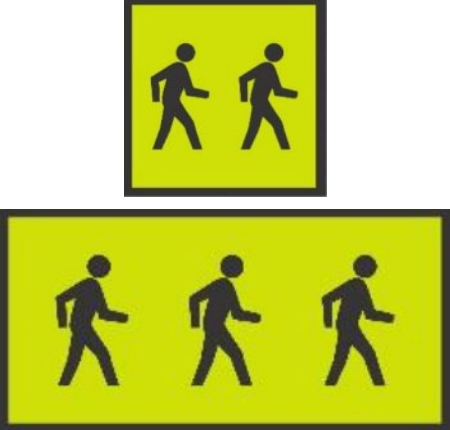
Sign	Sign number	Size (mm)	Figure	Notes
KEEP INTERSECTION CLEAR	TM2-Q08	1200 x 600		
Event				
EVENT AHEAD	ETM01_2	1200 x 600		Refer to Event traffic management design guidelines Clause 3.2.2.
EVENT IN PROGRESS	ETM02_2	1200 x 600		Refer to <i>Event traffic management design guidelines</i> Clause 3.2.3.
END EVENT	ETM03_2	1200 x 600		Refer to <i>Event traffic management design guidelines</i> Clause 3.2.4.

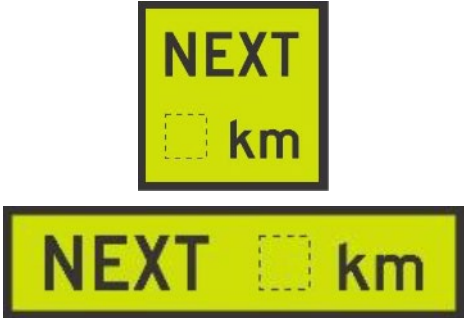Sign	Sign number	Size (mm)	Figure	Notes
Cyclists Racing (symbolic)	ETM04_1 ETM04_2	600 x 600 1200 x 600		Refer to <i>Event traffic management design guidelines</i> Clause 3.2.5.
Cyclists Riding (symbolic)	ETM05_1 ETM05_2	600 x 600 1200 x 600		Refer to <i>Event traffic management design guidelines</i> Clause 3.2.6.

Sign	Sign number	Size (mm)	Figure	Notes
Share The Road (for roads 60 km/h or less speed zones) (symbolic)	ETM06_1 ETM06_2	600 x 600 1200 x 600		Refer to <i>Event traffic management design guidelines</i> Clause 3.2.7.
Runners (symbolic)	ETM07_1 ETM07_2	600 x 600 1200 x 600		Refer to <i>Event traffic management design guidelines</i> Clause 3.2.8.

Sign	Sign number	Size (mm)	Figure	Notes
Walkers (symbolic)	ETM08_1 ETM08_2	600 x 600 1200 x 600		Refer to <i>Event traffic management design guidelines</i> Clause 3.2.9.
Share The Road (for roads greater than 60 km/h speed zones) (symbolic)	ETM09_1 ETM09_2	600 x 600 1200 x 600		Refer to <i>Event traffic management design guidelines</i> Clause 3.2.7.

Sign	Sign number	Size (mm)	Figure	Notes
NEXT ... km	ETM10_1 ETM10_2	600 x 600 1200 x 600		Refer to <i>Event traffic management design guidelines</i> Clause 3.2.10.
CYCLING EVENT	ETM11_1	1200 x 600		Refer to <i>Event traffic management design guidelines</i> Clause 3.2.11.
CYCLING EVENT	ETM11_2	1200 x 300		Refer to <i>Event traffic management design guidelines</i> Clause 3.2.11.
CYCLISTS AHEAD	ETM12_1	1200 x 300		Refer to <i>Event traffic management design guidelines</i> Clause 3.2.12.
CYCLISTS FOLLOWING	ETM12_2	1200 x 300		Refer to <i>Event traffic management design guidelines</i> Clause 3.2.12.

Sign	Sign number	Size (mm)	Figure	Notes
SHARE THE ROAD	ETM13_1 ETM13_2	600 x 600 1200 x 300		Refer to <i>Event traffic management design guidelines</i> Clause 3.2.7.
EVENT Parking	ETM15	600 x 600		<p>The EVENT Parking panel may be used with the Direction Arrow (TM10-1A) or the long arrow (TM5-8B) to indicate a direction to the Event Parking.</p> <p>The direction arrow shall not point toward the Parking symbol.</p> <p>Example</p> 

Appendix B – Multi-message sign combinations (informative)

Difference

The following replaces Figure B1 - Multi-message sign combination examples.

Figure B1 – Multi-message sign combination examples with traffic travelling to the right side of the signs



Addition

The following Figure B2 provides additional multi-message sign combination examples.

Figure B2 – Additional multi-message sign combination examples with traffic travelling to the right side of the signs



Appendix C – Supplementary list of temporary roadworks signs (normative)



C.1 Supplementary list of temporary roadworks signs approved for use in Queensland




New




This Appendix describes the use of signs for special situations at temporary roadworks. Further details of the design of the signs may be obtained from the Traffic Engineering Team (TrafficEngineering.Support@tmr.qld.gov.au) at the Department of Transport and Main Roads, Brisbane.



Table C.1 lists the temporary roadworks signs approved for use in Queensland.




Table C.1 — List of temporary roadworks signs approved for use in Queensland




Sign	Sign number	Size (mm)	Figure	Notes
ROADWORK AHEAD	T1-Q06	600 x 900		This sign shall only be used on narrow medians and shoulders where the standard T1-1 or T1-31 ROAD WORK AHEAD signs would not fit and be an obstruction to traffic.
ROADWORK ON SIDE ROAD (ARROW)	T1-Q07	900 x 600		This sign may be used in advance of a four-way intersection where work is being carried out on a side road, there is insufficient distance to provide appropriate signing of the work on the side road and it is desired to indicate which side road is subject to roadworks. The sign is used in lieu of the ROADWORK ON SIDE ROAD (T1-25) sign in this case.



Sign	Sign number	Size (mm)	Figure	Notes
LINE MARKERS ON ROAD	T1-Q08A T1-Q08B T1-Q08C	900 x 600 1500 x 600 1800 x 600		This sign may be used in lieu of the Workers (symbolic) (T1-5) sign to warn approaching traffic that line markers are working on the road ahead. This sign is used in addition to, not to replace, other temporary signs.
MOBILE LINE MARKING AHEAD	T1-Q09	900 x 600		This sign may be used to warn approaching traffic that line marking machines are working on the road ahead. It may be mounted on a job support vehicle travelling behind or ahead of the line marking machine, in which case a panel of chevrons is incorporated into the sign, or an illuminated flashing arrow sign used with the sign, to indicate the side of the vehicle to which traffic should pass.
Mowing (symbolic)	T1-Q10	900 x 600		This sign may be used in lieu of the ROAD PLANT AHEAD (T1-3) sign at frequently-changing work areas where grass mowing is being carried out.

Sign	Sign number	Size (mm)	Figure	Notes
LANE STATUS	T2-Q07	2230 x 900		<p>This sign is used where one or more lanes are closed on a four-lane roadway. It gives only advance warning of the lane closure and is used in conjunction with appropriate roadwork signing for the roadworks site.</p>
WET PAINT (L / R)	T6-Q08A T6-Q08B	1200 x 600 1800 x 750		<p>This sign is used as required to protect freshly-painted pavement markings while paint is drying. It may be used on intermediate vehicles in a mobile line marking convoy. LINEMARKING (T6-Q06) sign is required on leading and trailing vehicles.</p> <p>When the vehicle is equipped with an illuminated flashing arrow sign, the chevron panel is not required.</p>
Traffic Signal NOT IN USE	T3-Q02	300 x 900		<p>This sign is erected over lanterns at a new traffic signal installation prior to commencement of normal operation.</p>

Sign	Sign number	Size (mm)	Figure	Notes
SIGNALS UNDER REPAIR	T3-Q03	1200 x 700		This sign is erected where it is desired to advise approaching traffic that the signals are not operating and are under repair.
ROADWORKS NEXT ... km ... TO ... EXPECT DELAYS	T1-Q19	1800 x 1800		This sign is erected prior to the commencement of roadworks to inform road users of impending works and expected delays.

Sign	Sign number	Size (mm)	Figure	Notes
KEEP LEFT	R2-3-Q01	250 x 1200		This sign may be used with the four traffic cones on the centre line in advance of a traffic control station in lieu of T5-7 (Temporary Hazard marker) or at other locations where the KEEP LEFT message is required. It is designed to be mounted in 'weighted' temporary plastic or rubber support as per the T5-7 Temporary Hazard marker.
TURN ON HAZARD LIGHTS WHEN QUEUED	TC1992_1A TC1992_1B	900 x 600 1200 x 900		Refer to TC sign notes.
TURN OFF HAZARD LIGHTS	TC1992_2A TC1992_2B	900 x 600 1200 x 900		Refer to TC sign notes.

Sign	Sign number	Size (mm)	Figure	Notes
SPEED CAMERAS USED AT ROADWORKS FOR ROAD SAFETY	TC2320_1	2200 x 1600		Refer to TC sign notes and QGTTM Part 3 Section 5.5.4.
Orange Target Board to the standard Speed Restriction sign (R4-1) with a ROAD WORK supplementary plate (R4-3).	TC2366A TC2366B TC2366C	600 x 1050 800 x 1400 1200 x 2100		<p>A fluorescent orange border may be added to the standard sign and supplementary plate combination (example below).</p> 

Sign	Sign number	Size (mm)	Figure	Notes
<p>Orange Target Board to the standard Speed Limit AHEAD sign (G9-79) with a ROAD WORK supplementary plate (R4-3).</p>	<p>TC2367A TC2367B TC2367C</p>	<p>600 x 1200 800 x 1600 1200 x 2400</p>	 <p>The diagram shows a vertical rectangular sign with a white background and a thick orange border. At the top is a circular speed limit sign with a dashed square inside. Below the circle is the word 'AHEAD' in bold black capital letters. At the bottom is a rectangular supplementary plate with the words 'ROAD WORK' in bold black capital letters.</p>	<p>A fluorescent orange border may be added to the standard sign and supplementary plate combination (example below).</p>  <p>The diagram shows a vertical rectangular sign with a white background and a thick orange border. At the top is a circular speed limit sign with the number '80' inside. Below the circle is the word 'AHEAD' in bold black capital letters. At the bottom is a rectangular supplementary plate with the words 'ROAD WORK' in bold black capital letters.</p>

